

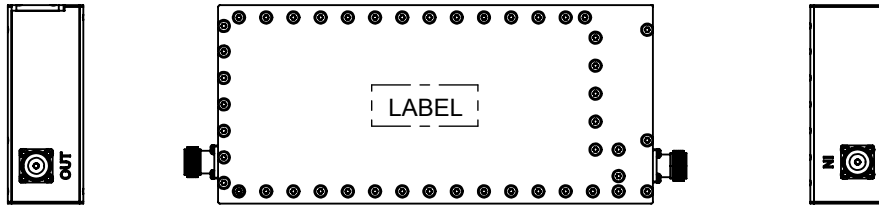


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	07.01.2022	HC.Qiu	



ITEM	SPECIFICATIONS
Frequency(MHz)	418~452
Insertion Loss(dB)	0.4 Max
Return Loss(dB)	20.8 Min
Attenuation(dB)	40 Min@DC ~ 370MHz 40 Min@500MHz ~ 4GHz
Power Handling(W) (pulse width 1 ms , with 25% duty cycle , with short circuit all phases on output port)	400 Max
Altitude(m)	1500 Max
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-40~+85
Weight(Kg)	1.0 Max
Connector	N Female
Notes	

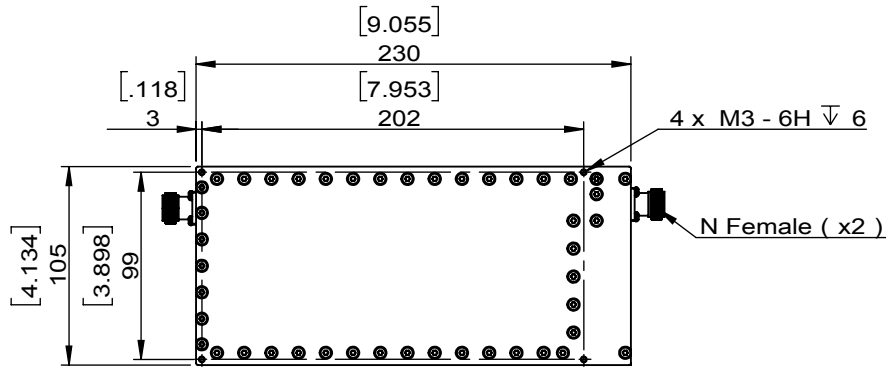

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.

JQL JQL Technologies Corporation				
MATERIAL:		DWG NO: JFCB0418T0452NF-A		
SURFACE TREATMENT: Painted Black		DWG BY:	YL.Chen	07.01.2022
DESCRIPTION: Filter		CHK'D BY:		SCALE
		APPV'D BY:		1:4
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4