



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	10.16.2022	HC.Qiu	

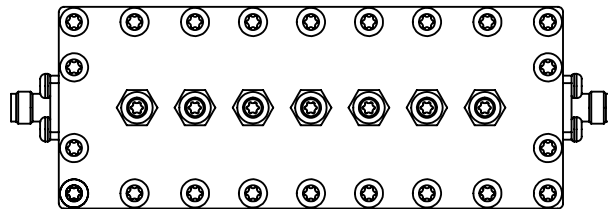

ITEM	SPECIFICATIONS
Frequency(MHz)	2580~2610
Insertion Loss(dB)	2.0 Max
Return Loss(dB)	18 Min
Rejection(dB)	40 Min@2500MHz 40 Min@2700MHz
Impedance( $\Omega$ )	50
Power(W)	15 Max
Temperature( $^{\circ}$ C)	-20~+65
Connector	SMA Female
Notes	

<b>JQL</b> JQL Technologies Corporation				
<b>MATERIAL:</b>		DWG NO: JFCB2580T2610SF		
<b>SURFACE TREATMENT:</b> Silver Plating		DWG BY:	YL.Chen	10.16.2022
<b>DESCRIPTION:</b> Filter		CHK'D BY:		SCALE
		APPV'D BY:		1:1.5
		Unit: mm[inch]	Tolerance: Liner: $\pm 0.25$ Anguar: $\pm 0.5^{\circ}$	The First: 
				A4

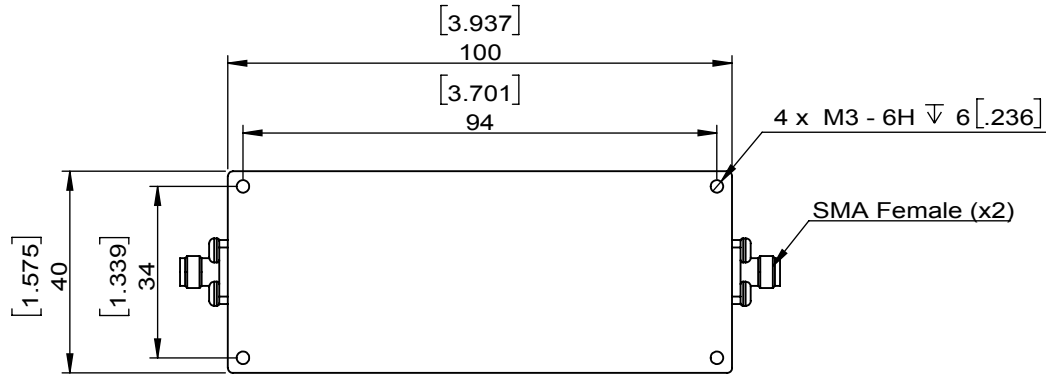

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.