


UHF Dual Coaxial Isolator

J12C0450T0470N10

Description:

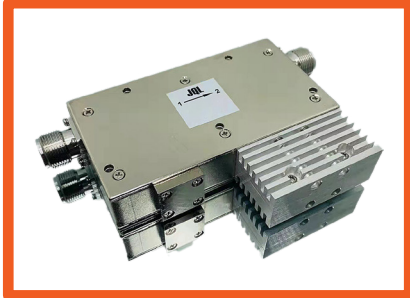


J12C0450T0470N10 is a dual coaxial Isolator in the frequency 0.450~0.470 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.7dB and minimum return loss of 20dB. It can handle CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	J12C0450T0470N10
Frequency (GHz)	0.450~0.470
Insertion Loss(dB)MAX	0.7
Isolation(dB)MIN	50
Return Loss(dB)MIN	20
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

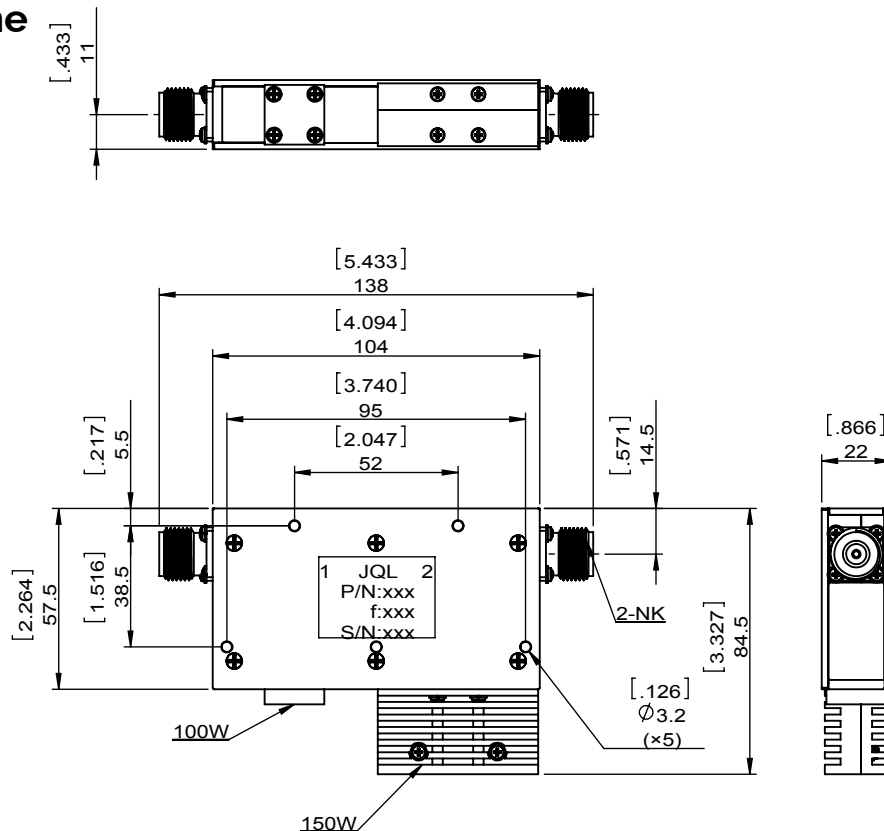

UHF Dual Coaxial Isolator

J12C0450T0470N10

Test Data

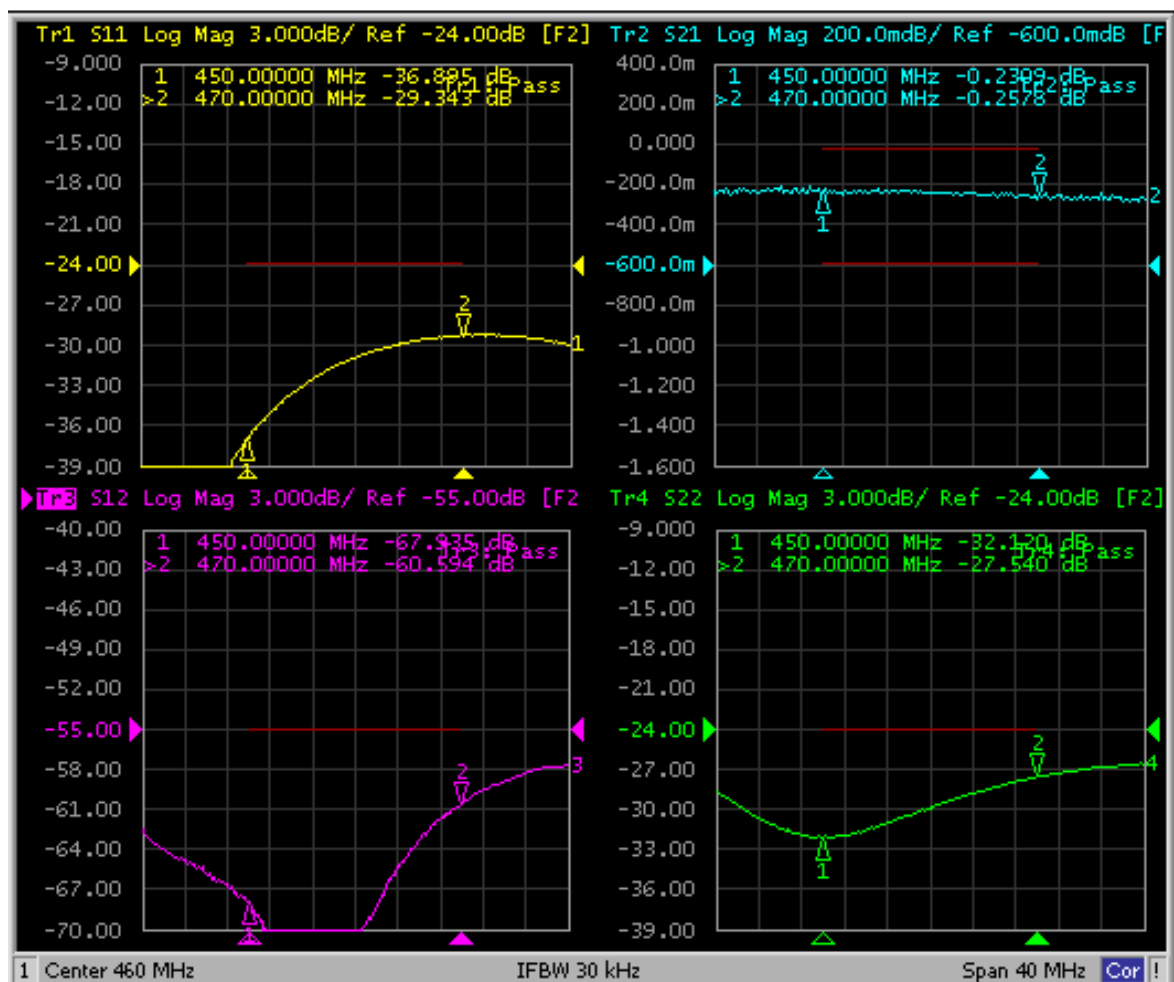

Applications

- Public Safety