



1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV. A/0								0		J.Z	10.09.2022	HC.Qiu

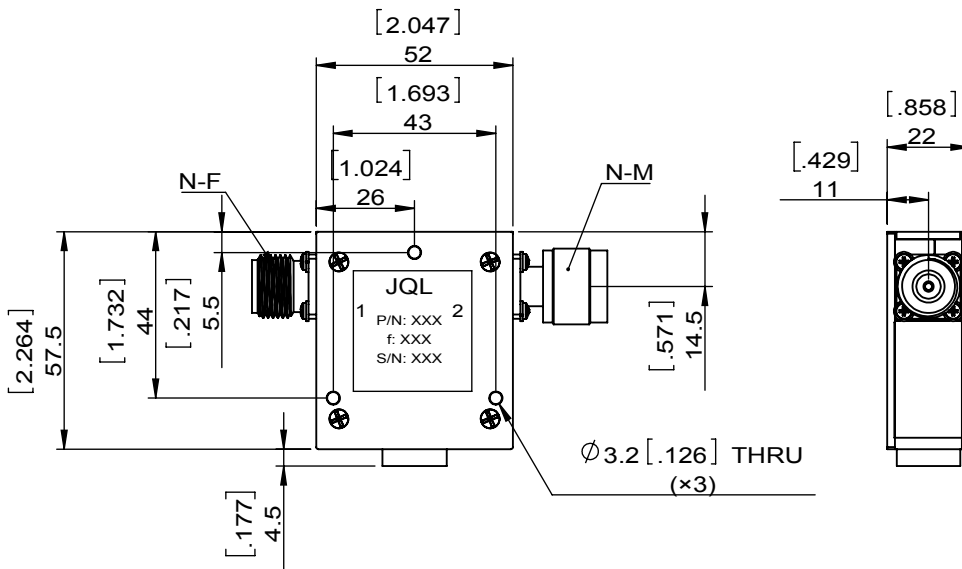

SPECIFICATIONS	
Part's Number	JIC0500T0520NFM2
Frequency(GHz)	0.500~0.520
Direction	-
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	28.0@25°C 25.0@-10~+50°C
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	20/10/-
Operating Temperature(°C)	-10~+50
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Technologies Corporation.				
MATERIAL: STEEL		DWG NO: JIC0500T0520NFM2		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	J.Z	10.09.2022
DESCRIPTION: COAXIAL ISOLATOR		CHK'D BY:		SCALE
		APP'V'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

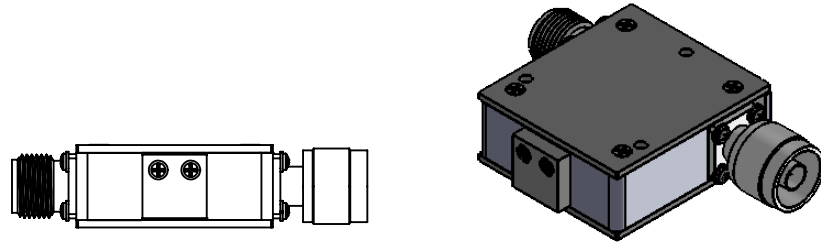

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

WEIGHT: