

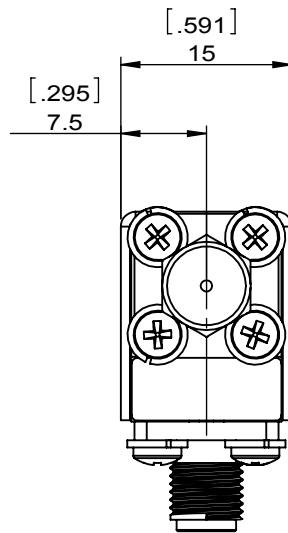
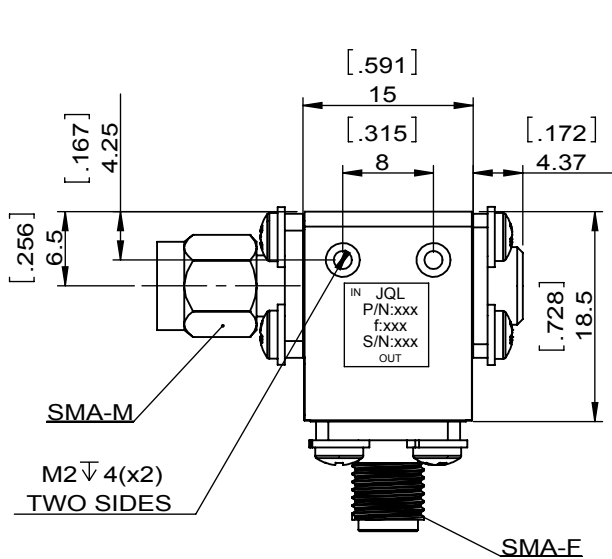


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		J.Z	09.07.2022	HC.Qiu			

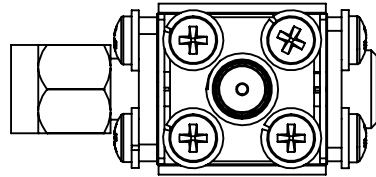

SPECIFICATIONS	
Part's Number	JIC6400T7200SMSF0
Frequency(GHz)	6.400~7.200
Direction	CCW (SMA-M TO SMA-F)
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	25.0
Return Loss(dB)MIN	23.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	1/-/100
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Technologies Corporation.				
MATERIAL: STEEL		DWG NO: JIC6400T7200SMSF0		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	J.Z	09.07.2022
DESCRIPTION: COAX ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		3:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

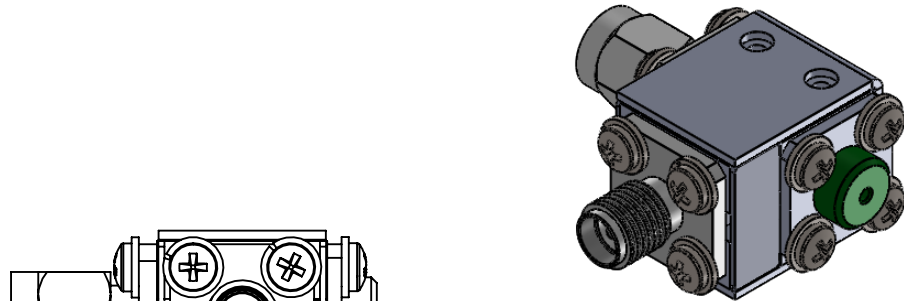

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

WEIGHT:

SHEET 1 OF 1