

UHF Drop in Isolator

JID0880T0960M10

Description:




JID0880T0960M10 is a high power drop in isolator for telecom applications. This is a very low insertion loss, low IMD and high isolation unit that can handle 100W in the forward & reverse direction.

Electrical Specification

Part Number	JID0880T0960M10
Frequency (GHz)	0.880~0.960
Insertion Loss(dB)	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)	22.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	100/100/-
Tab(W×LG×THK)(mm[Inch])	1.0[0.039]×2.5[0.098]×0.2[0.008]


Outline

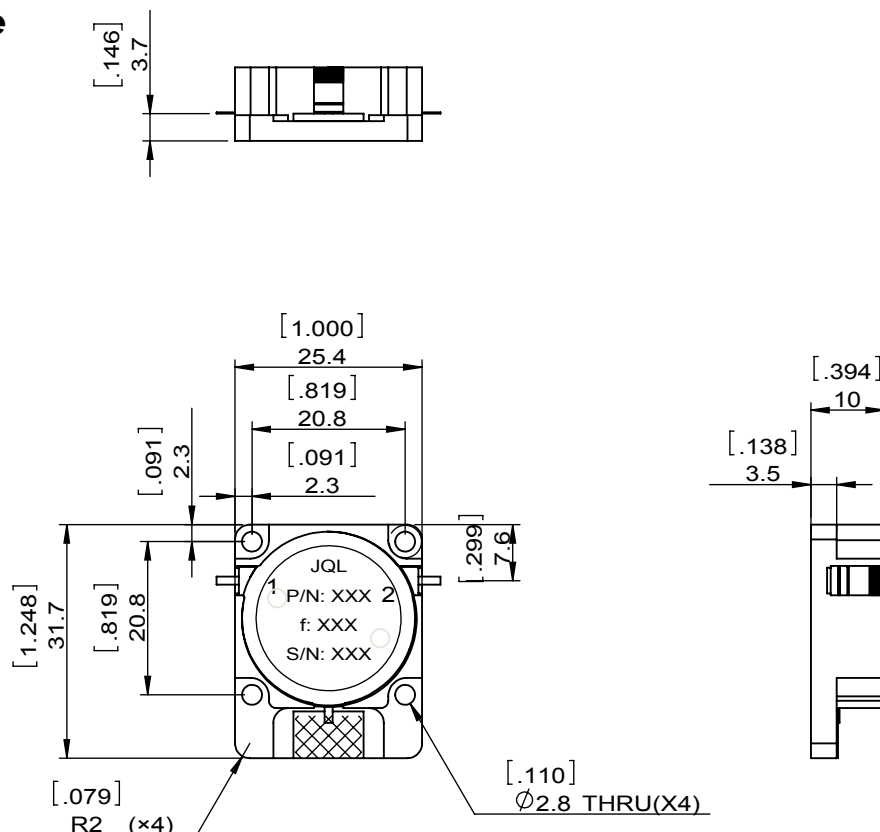

UHF Drop in Isolator

JID0880T0960M10

Test Data

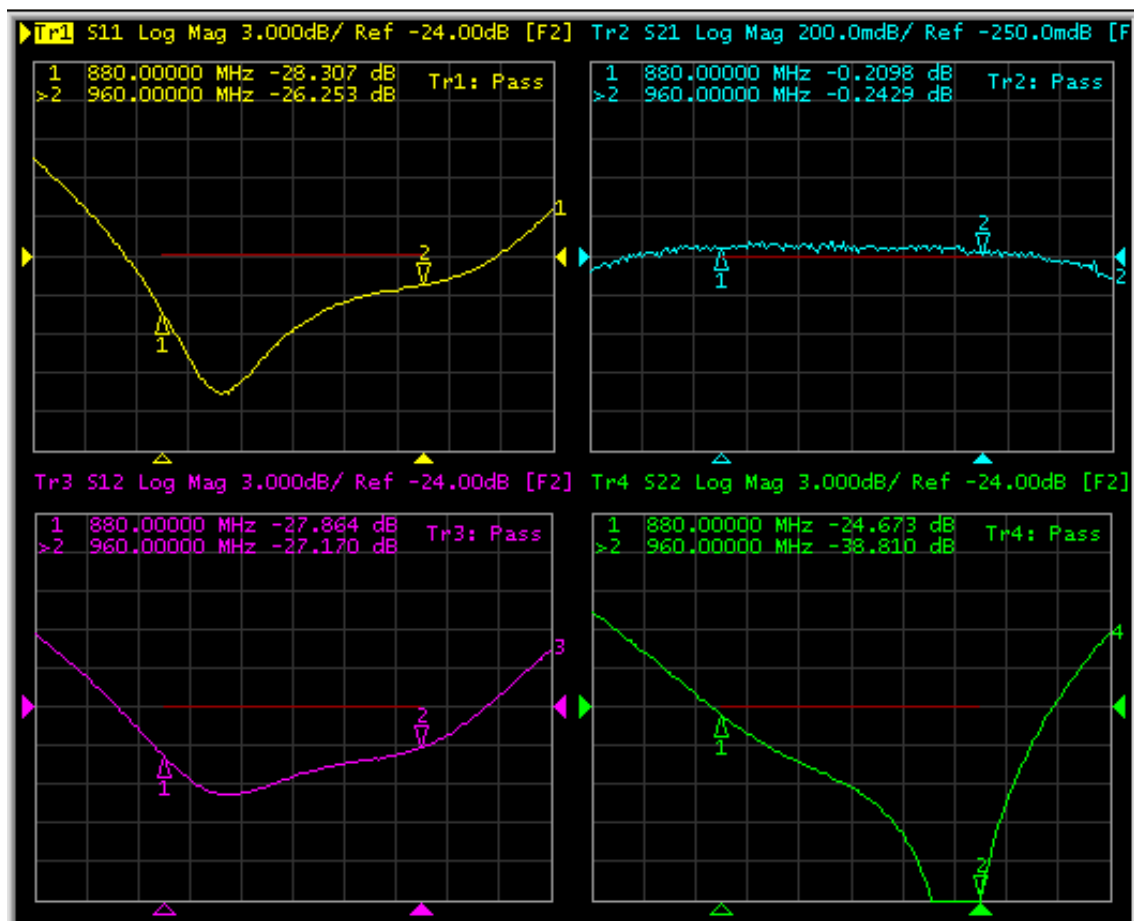

Features

- Standard footprint
- High power handling capability
- Low insertion loss
- Low IMD levels

RoHS & REACH Compliant

Applications

- Telecom infrastructure
- Power amplifiers