


JID2400T2500M25A3

Electrical Specification

Part Number	JID2400T2500M25A3
Frequency (GHz)	2.400~2.500
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	20
Return Loss(dB)MIN	21
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	300/250/-
Tab(W×LG×THK)(mm[Inch])	1.1[.433]WX3.0[.118]LGX0.4[.016]THK

Outline

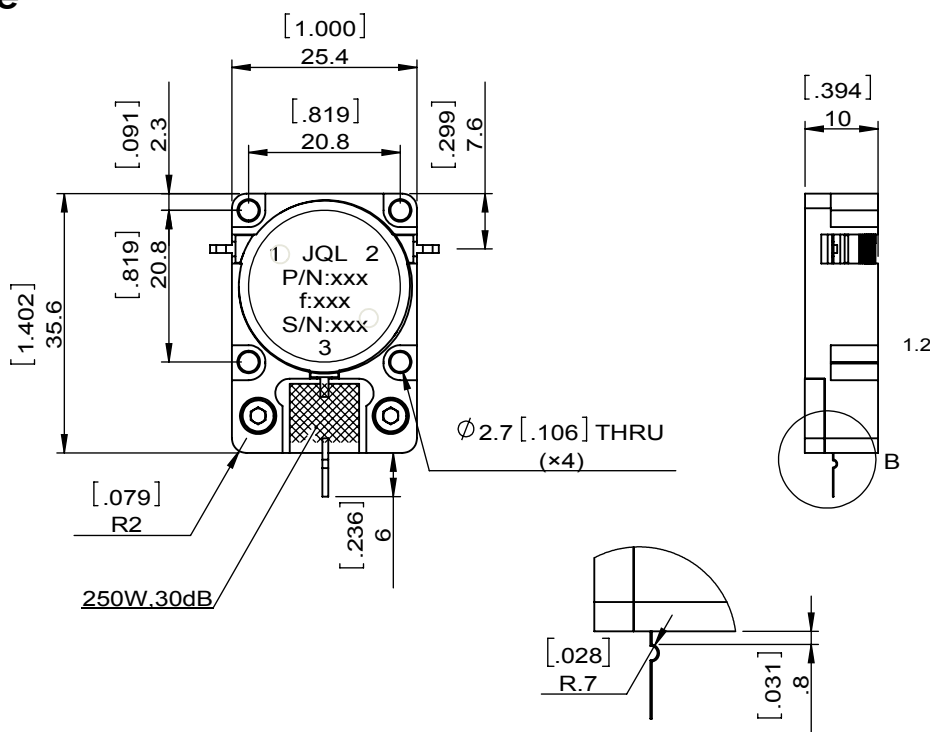


Page | 1

S Band Drop in Isolator

JID2400T2500M25A3

Test Data

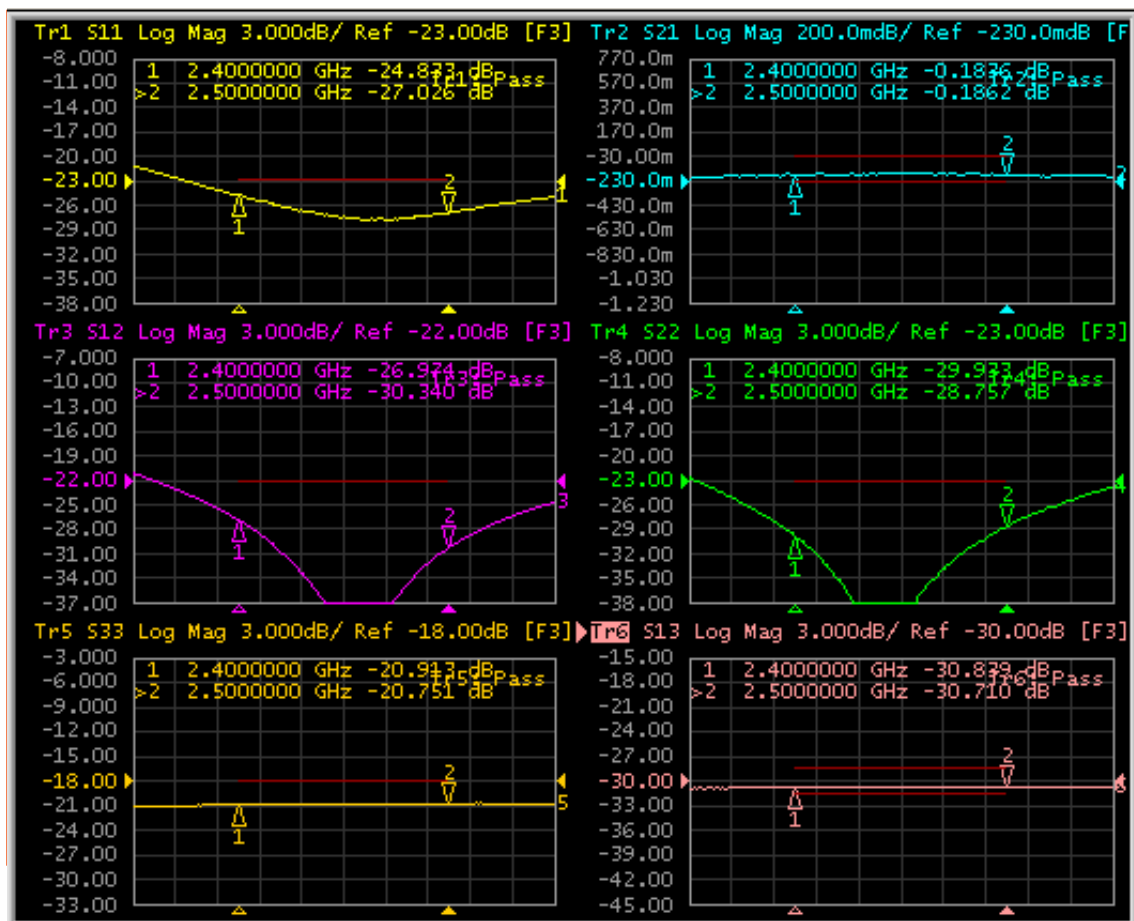

Features

- High power handling capability
- Low insertion loss
- RoHS & REACH Compliant

Applications

- Power amplifiers