

UHF Band Surface Mount Isolator

JIM0703T0733PW0

Description:




JIM0703T0733PW0 is a surface mount isolator in the frequency 0.703~0.733 GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.4 dB and minimum return loss of 18 dB. It can handle a CW power of FWD/ REV 5/5W and PK handle of 5W

Electrical Specification

Part Number	JIM0703T0733PW0
Frequency (MHz)	0.703~0.733
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-20°C~+70°C
Power FWD/REV/PK(Watt)	5/5/5


Outline

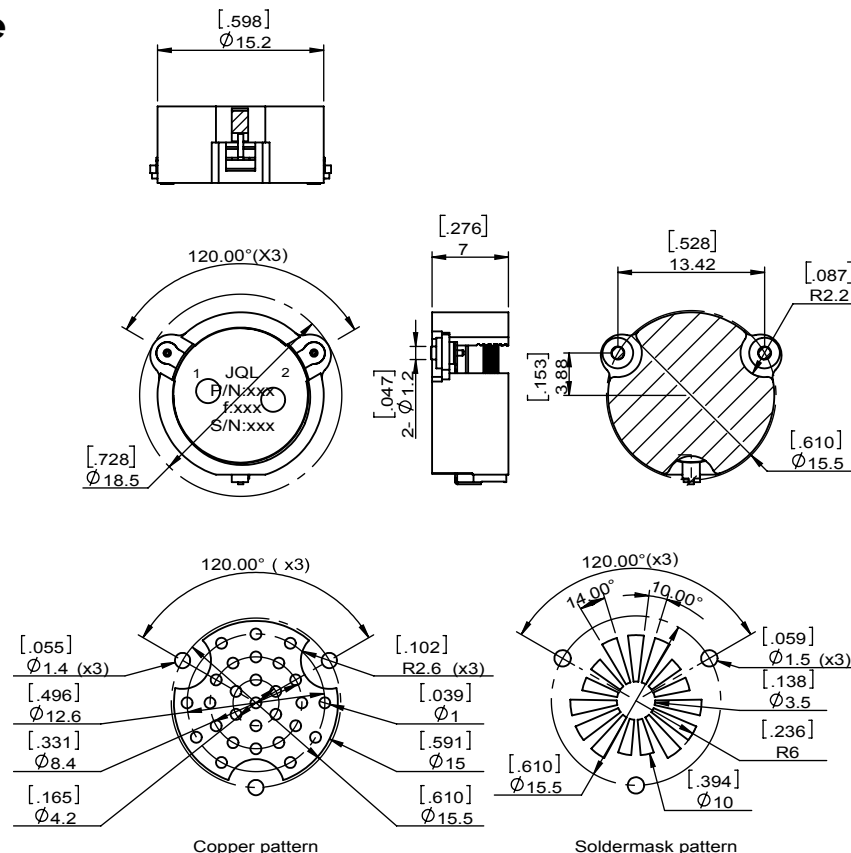

UHF Band Surface Mount Isolator

JIM0703T0733PW0

Test Data

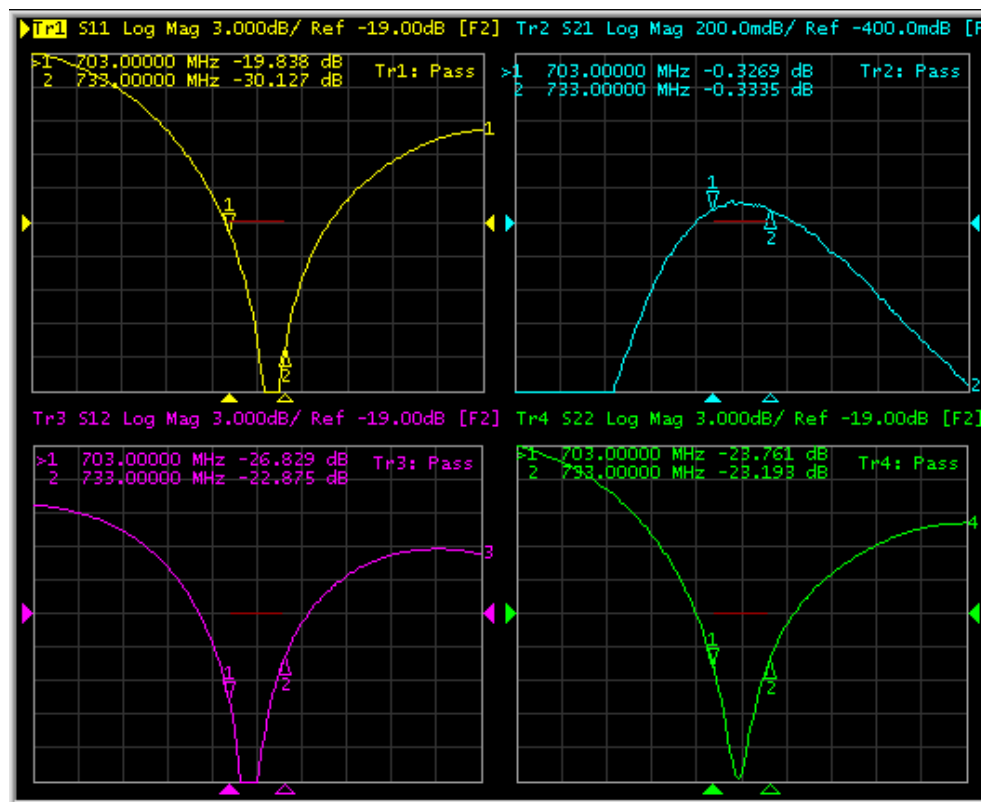

Application(s)

- 5G