




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		J.Z		09.16.2022	HC.Qiu				



SPECIFICATIONS	
Part's Number	JIM0849T0851PN10A3
Frequency(GHz)	0.849~0.851
Direction	CW
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-75@2×60W CW tones,5MHz spacing@25°C
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-/30
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

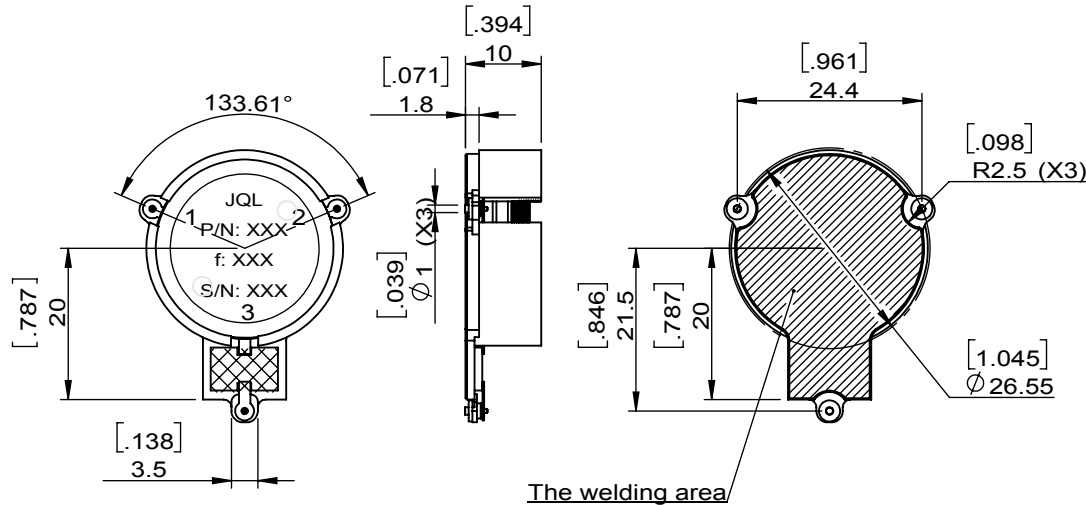

<b>JQL</b> JQL Technologies Corporation.				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JIM0849T0851PN10A3		
<b>SURFACE TREATMENT:</b> SILVER PLATING		DWG BY:	J.Z	09.16.2022
<b>DESCRIPTION:</b> SMT ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.