

S Band Surface Mount Isolator

JIM2450T2550PT2C-SP

Description:




JIM2450T2550PT2C-SP is a surface mount isolator in the frequency 2.450~2.550 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 22.0dB. It can handle a CCW Power FWD/REV/PK(Watt) of 20/20/40

Electrical Specification

Part Number	JIM2450T2550PT2C-SP
Frequency (GHz)	2.450~2.550
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	20/20/40

Outline

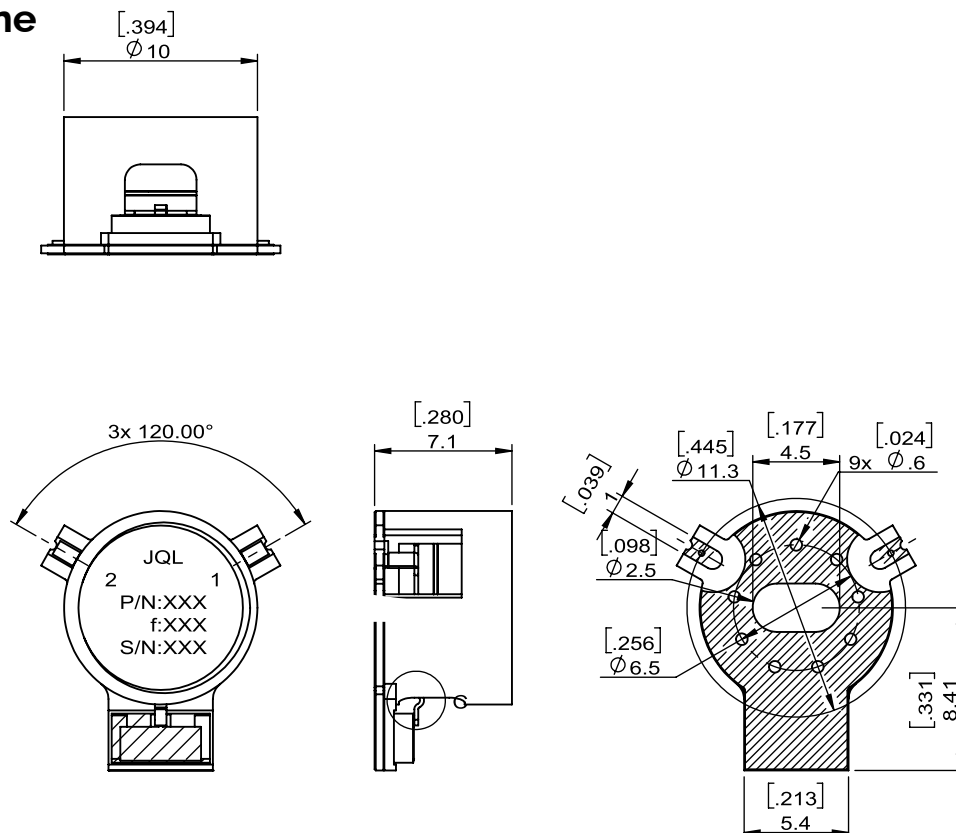

S Band Surface Mount Isolator

JIM2450T2550PT2C-SP

Test Data

