
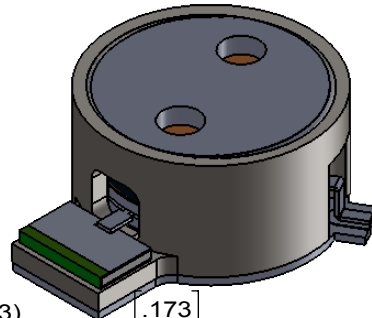
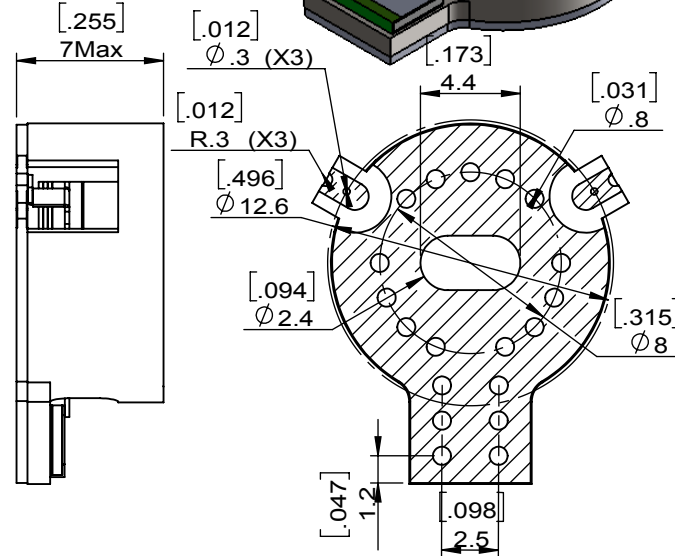




Document No. QR4-700-T-003

REV. A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		J.Z	10.15.2022	HC.Qiu

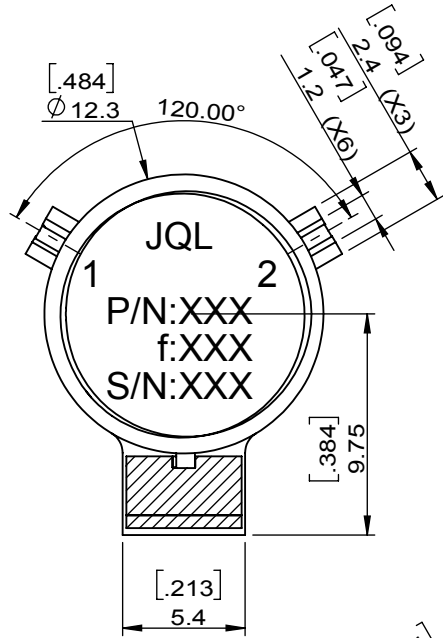

SPECIFICATIONS	
Part's Number	JIM7200T8500VM2T
Frequency(GHz)	7.200~8.500
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
3rd IMD(dBc)MAX	-70@2X15W
Power FWD/REV/PK(Watt)	20/20/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

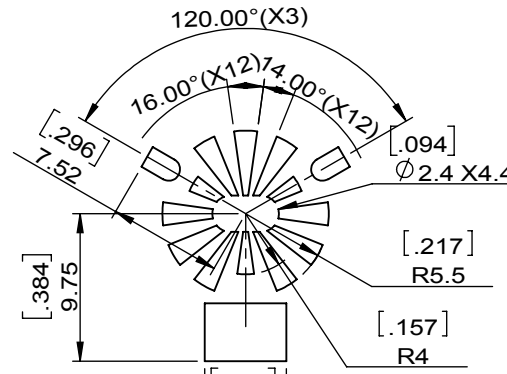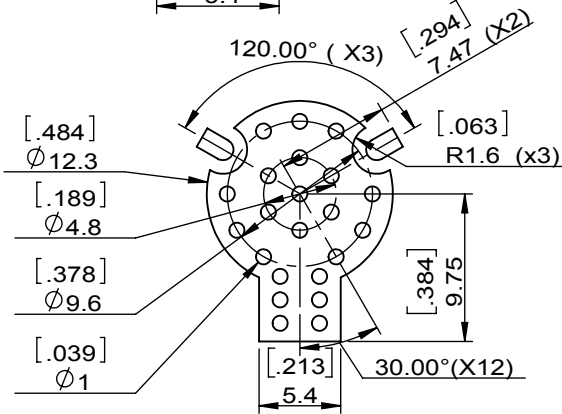

Copper Pattern

Soldermask Pattern

JQL JQL Technologies Corporation

MATERIAL: STEEL	DWG NO: JIM7200T8500VM2T
SURFACE TREATMENT: SILVER PLATING	DWG BY: J.Z CHK'D BY: APP'V'D BY:
DESCRIPTION: SMT ISOLATOR	10.15.2022 SCALE 3:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5° The First:
	A4



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

WEIGHT: