


Ku Band Microstrip Isolator

2IMC-15.75-1-15.5BW19.35

Description:

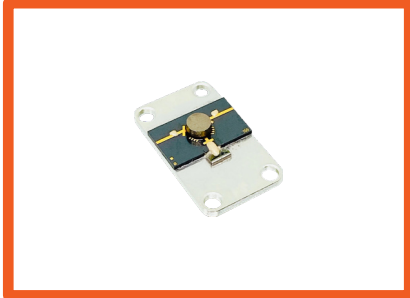


2IMC-15.75-1-15.5BW19.35 is a microstrip isolator in the frequency 14.000~17.000GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.7dB and minimum return loss of 16.6dB. It can handle a CW Power FWD/REV/PK(Watt) of 2

Electrical Specification

Part Number	2IMC-15.75-1-15.5BW19.35
Frequency (GHz)	14.000~17.000
Insertion Loss(dB)MAX	0.7
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	16.6
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	2


Outline

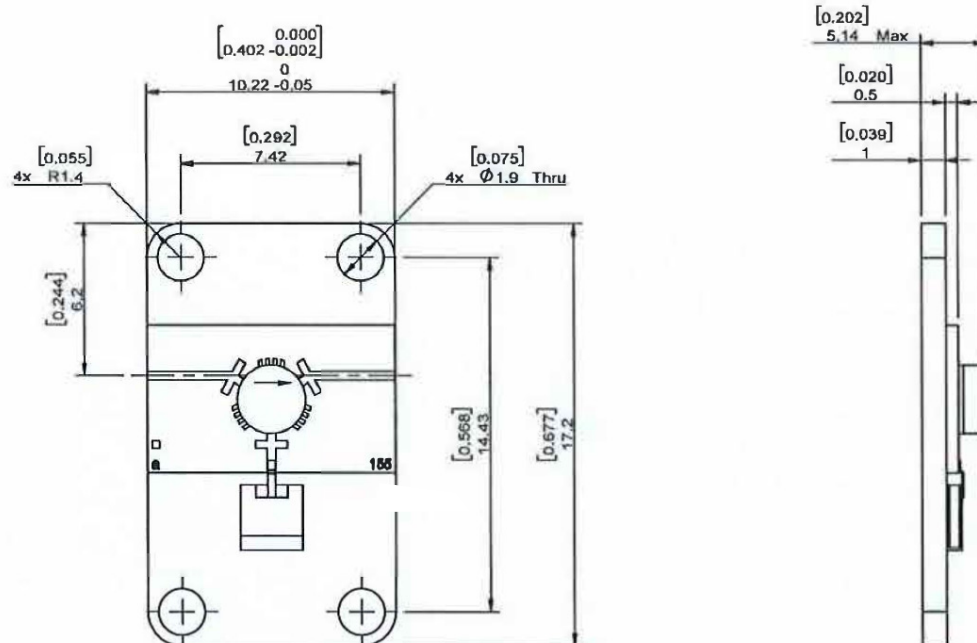

Ku Band Microstrip Isolator

2IMC-15.75-1-15.5BW19.35

Test Data

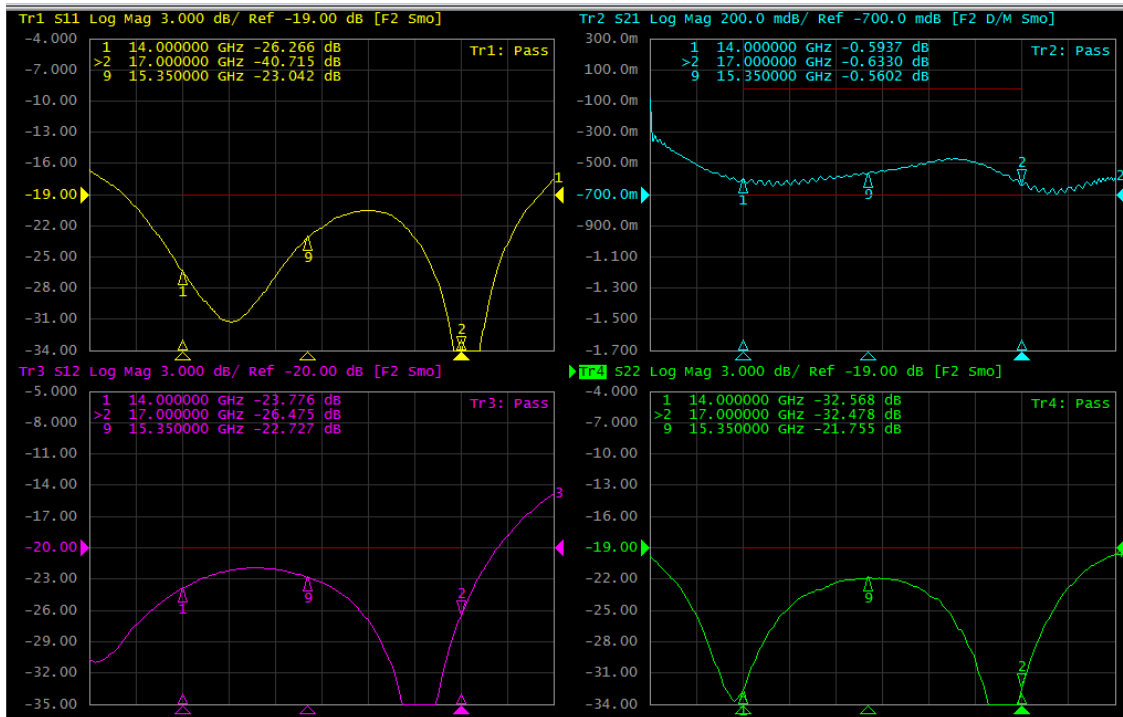

Applications

- Radar