


Coaxial Circulator, 1.8~2.2GHz

JCC1800T2200NF10

Description:

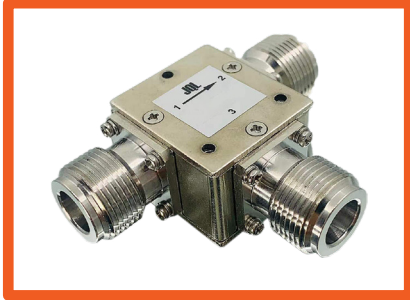


JCC1800T2200NF10 is a coaxial circulator in the frequency 1.800~2.200 GHz. The device is extremely stable over the temperature range of 0°C to +50°C, with maximum insertion loss of 0.4dB and minimum return loss of 18.0dB (VSWR:1.3 Max). This circulator can handle a CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	JCC1800T2200NF10
Frequency (GHz)	1.800~2.200
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	18.0 (VSWR:1.3 Max)
Operating Temperature	0°C~50°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

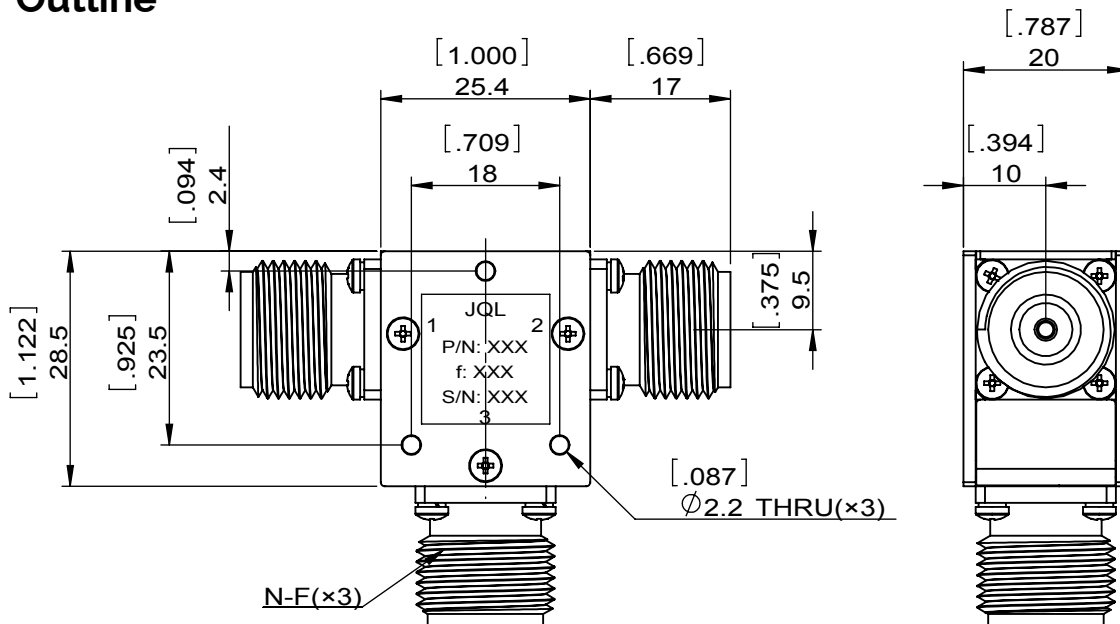

Coaxial Circulator, 1.8~2.2GHz

JCC1800T2200NF10

Test Data

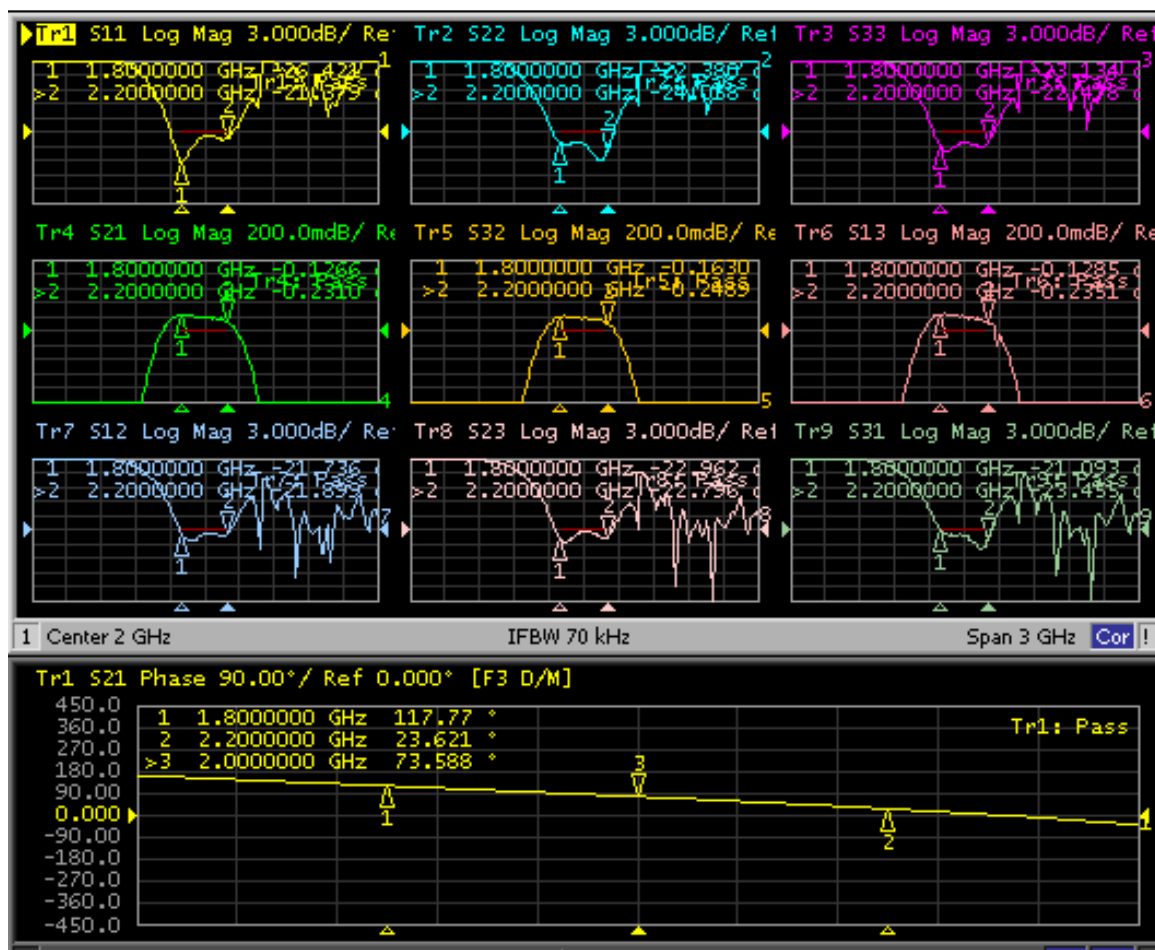

Applications

- Testing