

UHF Band Drop-In Circulator

JCD0617T0960KM2

Description:




JCD0617T0960KM2 is a UHF band drop-in circulator in the frequency 0.617~0.960 GHz. The device is extremely stable over the temperature range of 0°C to +50°C, with maximum insertion loss of 0.90dB and minimum return loss of 14.0dB. It can handle Power FWD/REV/PK(Watt) of 20/20/-

Electrical Specification

Part Number	JCD0617T0960KM2
Frequency (GHz)	0.617~0.960
Insertion Loss(dB)MAX	0.9
Isolation(dB)MIN	14.0
Return Loss(dB)MIN	14.0
Operating Temperature	0~+50
Power FWD/REV/PK(Watt)	20/20/-
Tab(W×LG×THK)(mm[Inch])	1.3[.05]×5.0[.12]×0.2[.008]


Outline

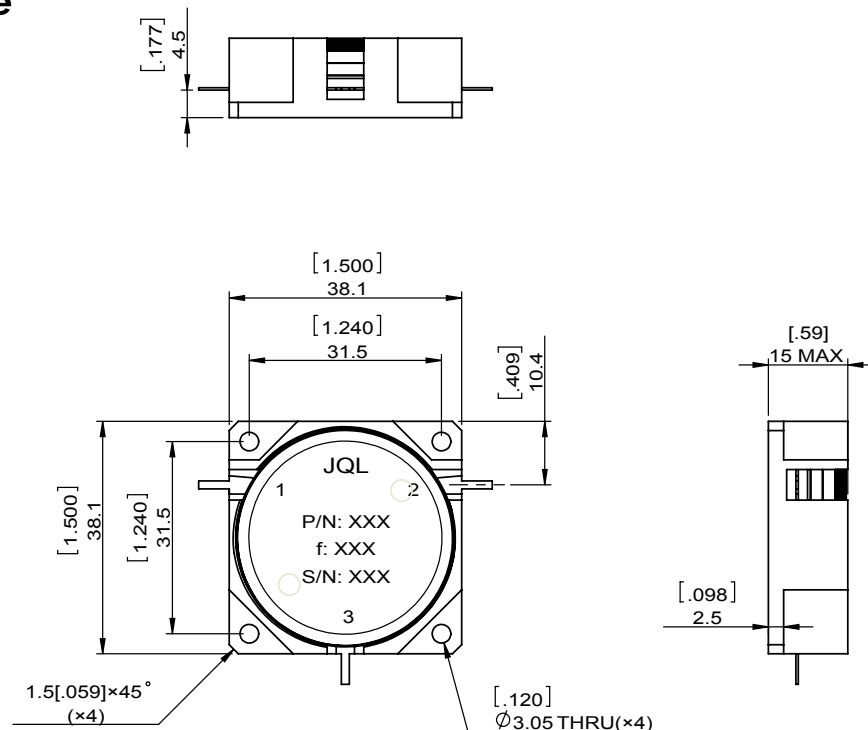

UHF Band Drop-In Circulator

JCD0617T0960KM2

Test Data

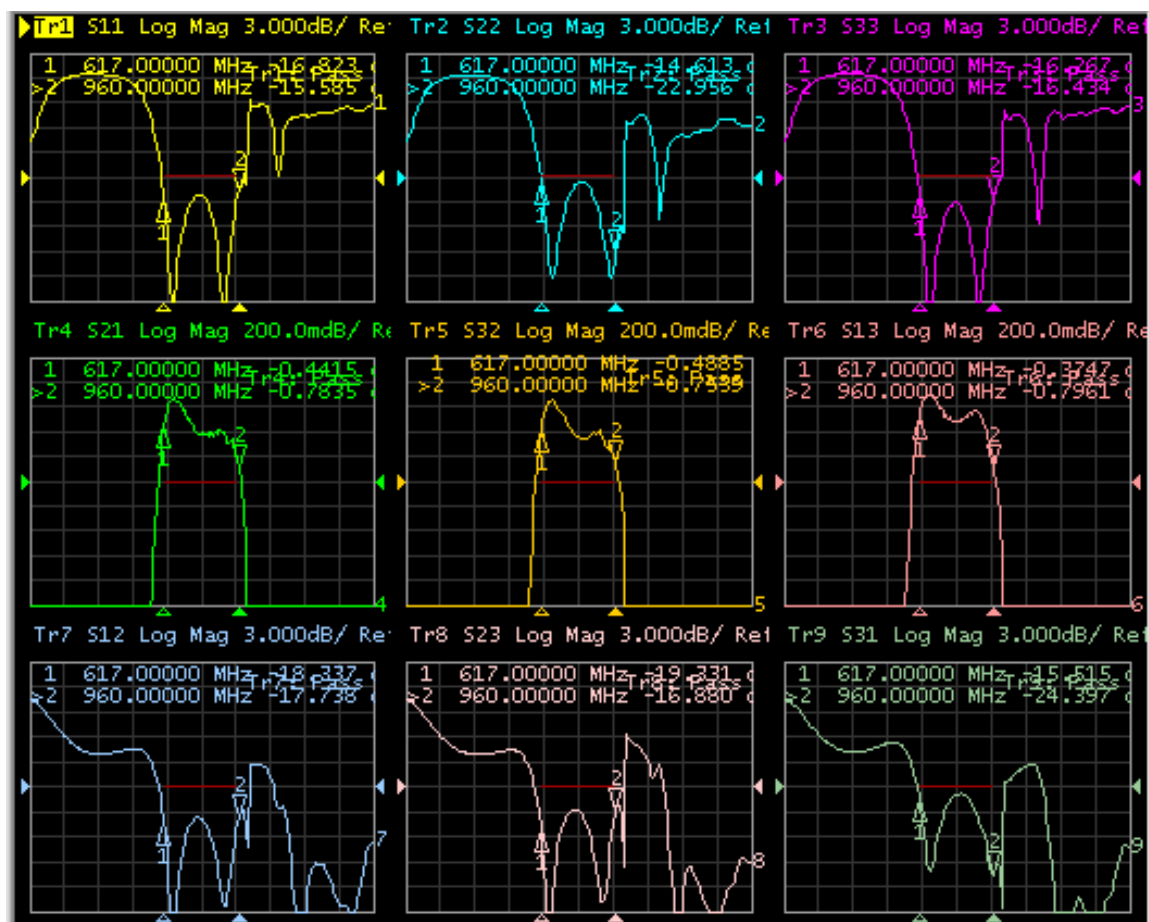

Applications

- Defense