

L Band Drop-In Circulator

JCD1000T1400M15C

Description:




JCD1000T1400M15C is a L band drop-in circulator in the frequency 1.000~1.400 GHz. The device is extremely stable over the temperature range of -40°C to +80°C, with maximum insertion loss of 0.50dB and minimum return loss of 18.0dB. It can handle Power FWD/REV/PK(Watt) of 150/150/-

Electrical Specification

Part Number	JCD1000T1400M15C
Frequency (GHz)	1.000~1.400
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-40°C~+80°C
Power FWD/REV/PK(Watt)	150/150/-
Tab(W×LG×THK)(mm[Inch])	1.1[.043]x2.5[.098]x0.2[.008]


Outline

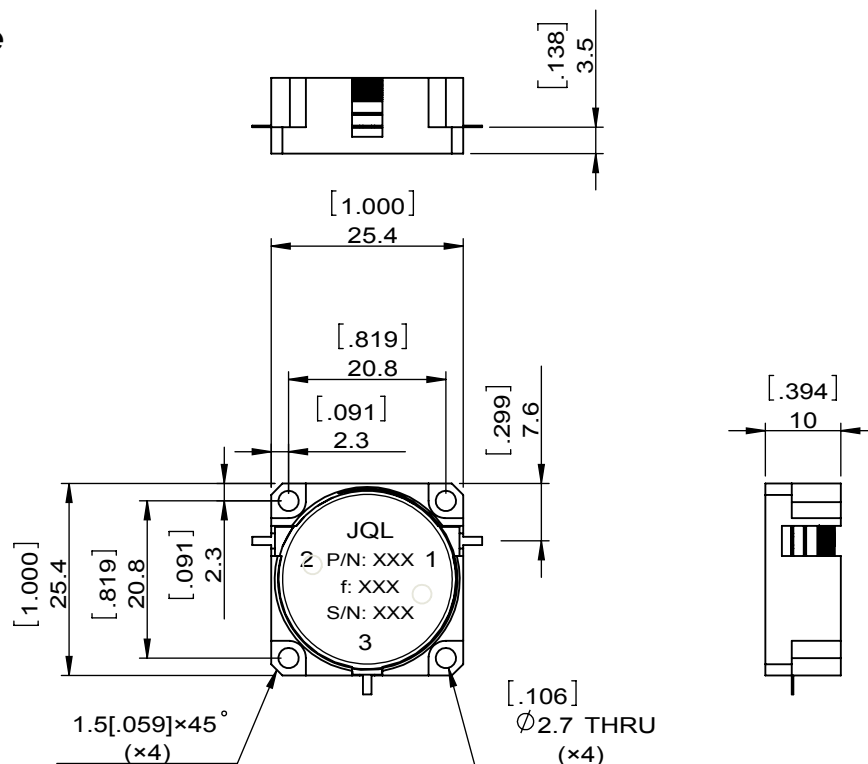

L Band Drop-In Circulator

JCD1000T1400M15C

Test Data

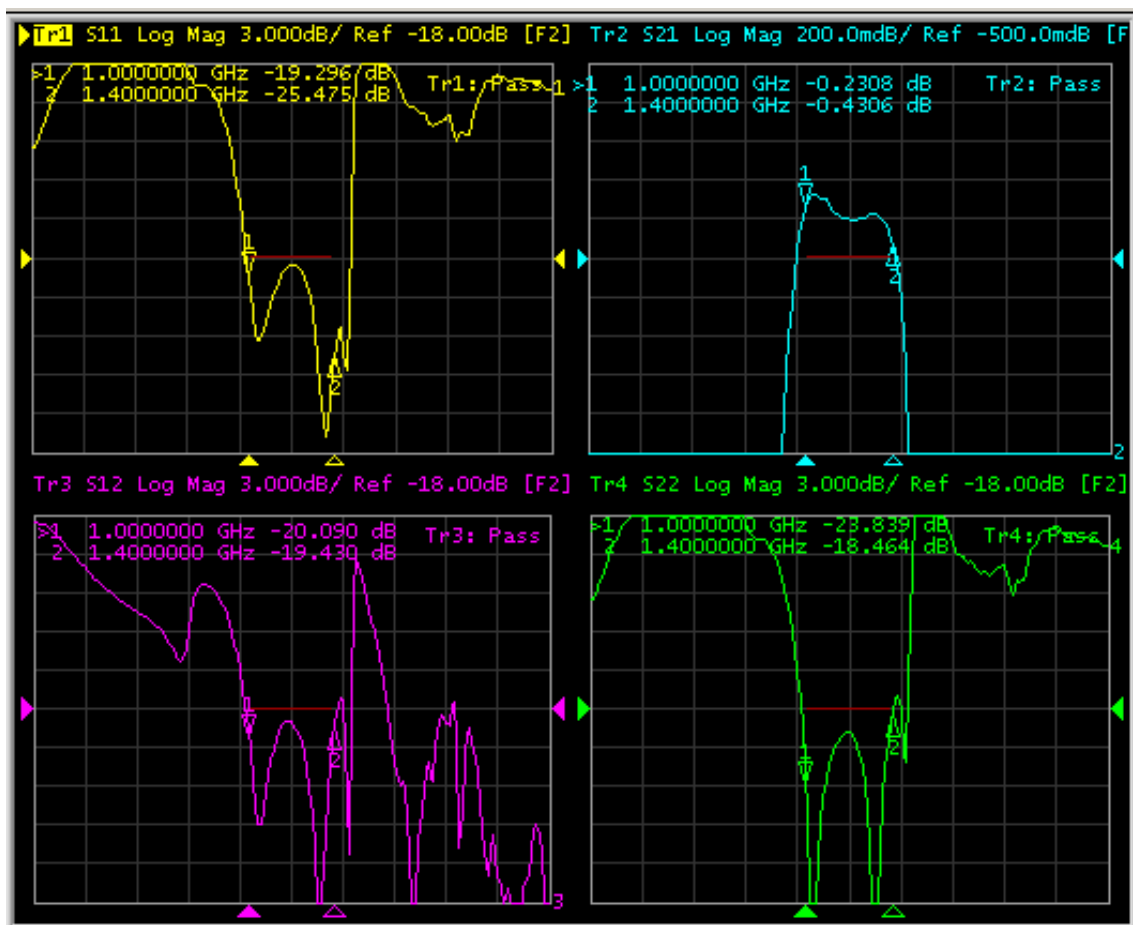

Applications

- Telecom