

UHF Band Surface Mount Circulator

JCM0850T0950S10R

Description:




JCM0850T0950S10R is a surface mount circulator in the frequency 0.850-0.950 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.50dB and minimum return loss of 19.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/500

Electrical Specification

Part Number	JCM0850T0950S10R
Frequency (GHz)	0.850-0.950
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	100/100/500


Outline

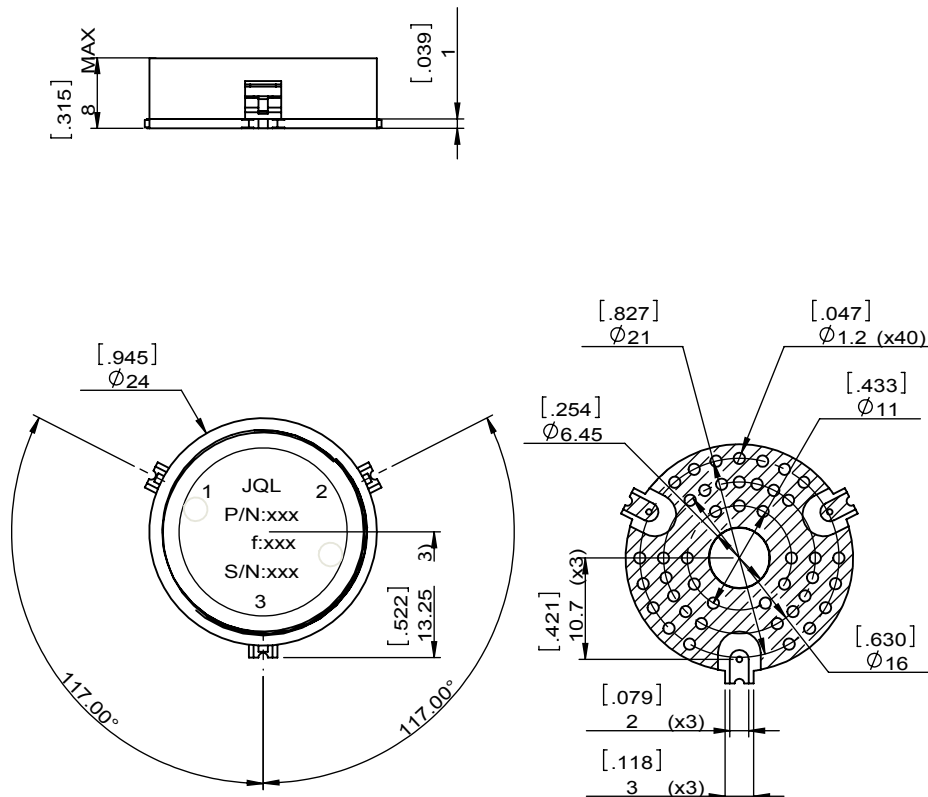

UHF Band Surface Mount Circulator

JCM0850T0950S10R

Test Data

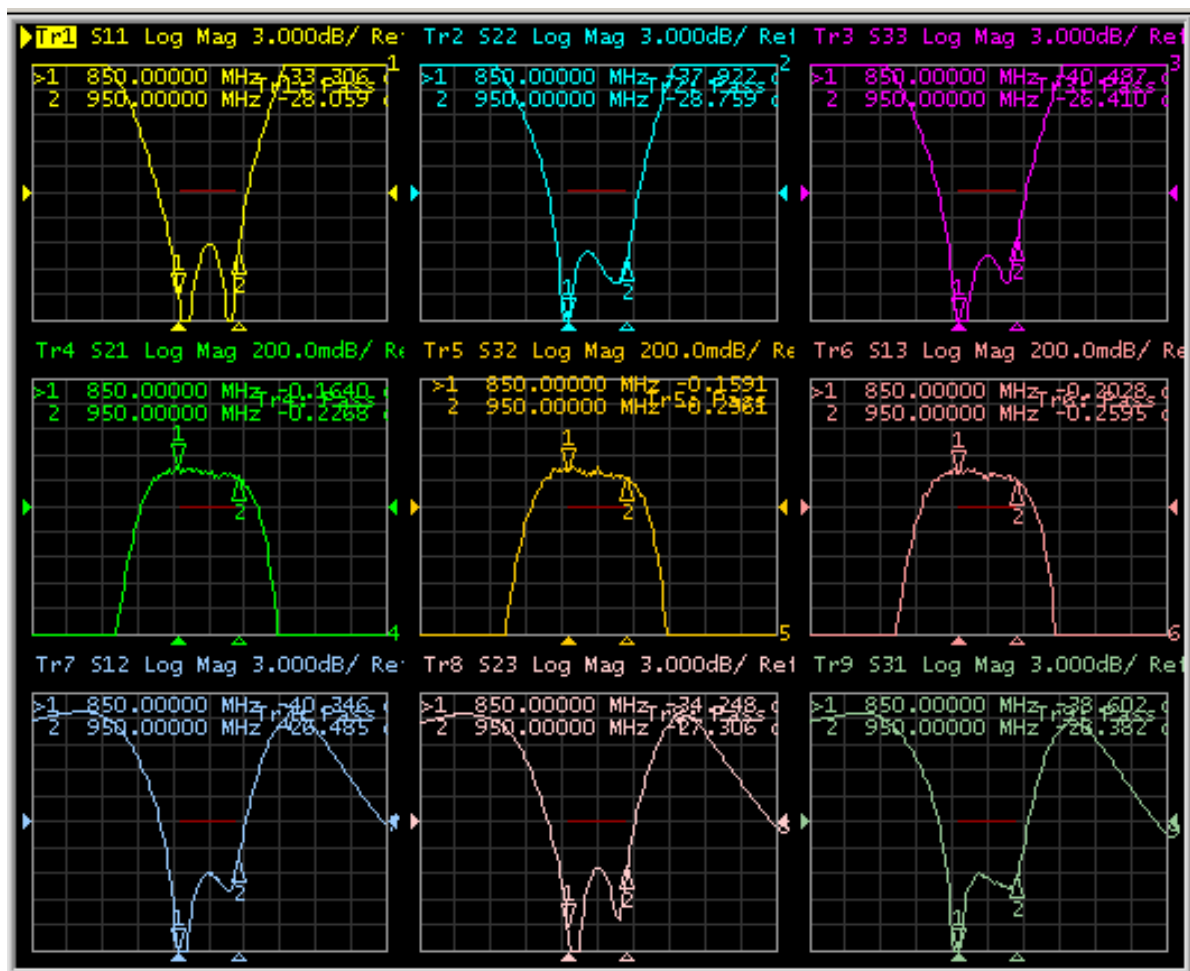

Applications

- Radar