


# S Band Surface Mount Circulator

## JCM2300T2690PV2

### Description:

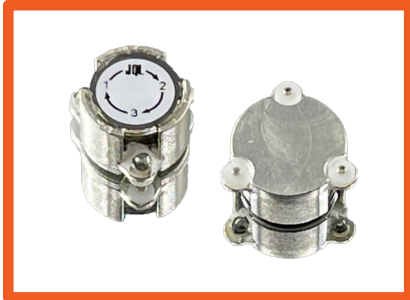


JCM2300T2690PV2 is a surface mount circulator in the frequency 2.300-2.690GHz. The device is extremely stable over the temperature range of -40°C to +100°C, with maximum insertion loss of 0.8dB (0.6Typ) and minimum return loss of 16.0(18.0Typ)dB. It can handle a CW Power FWD/REV/PK(Watt) of 20/-/120

### Electrical Specification

Part Number	JCM2300T2690PV2
Frequency (GHz)	2.300-2.690
Insertion Loss(dB)MAX	0.8(0.6Typ)
Isolation(dB)MIN	18.0(20.0Typ)    14.0@2240-2750MHz
Return Loss(dB)MIN	16.0(18.0Typ)
Operating Temperature	-40°C~100°C
Power FWD/REV/PK(Watt)	20/-/120


### Outline

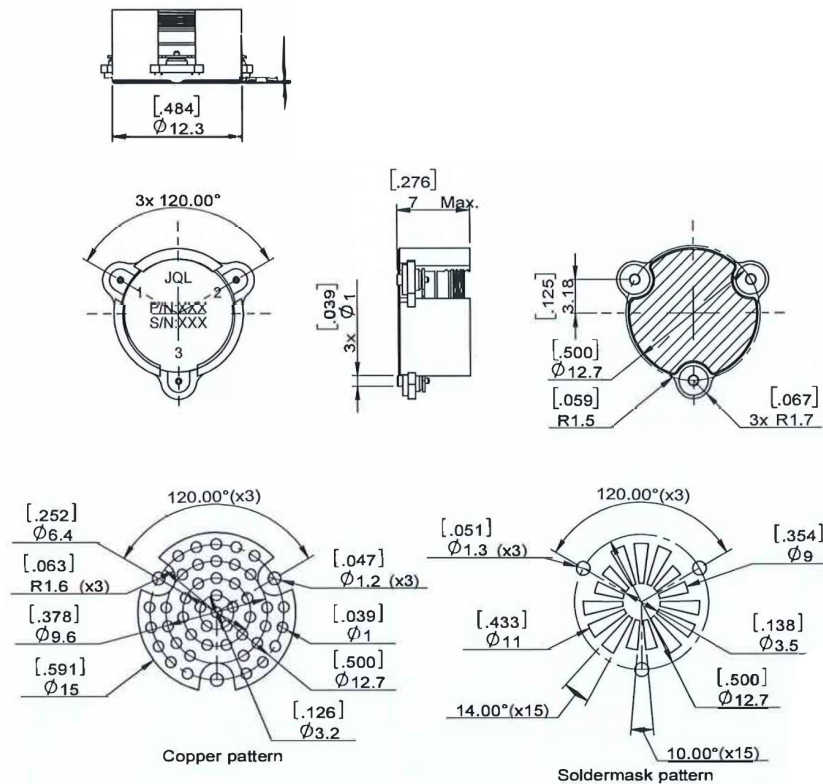

# S Band Surface Mount Circulator

## JCM2300T2690PV2

### Test Data

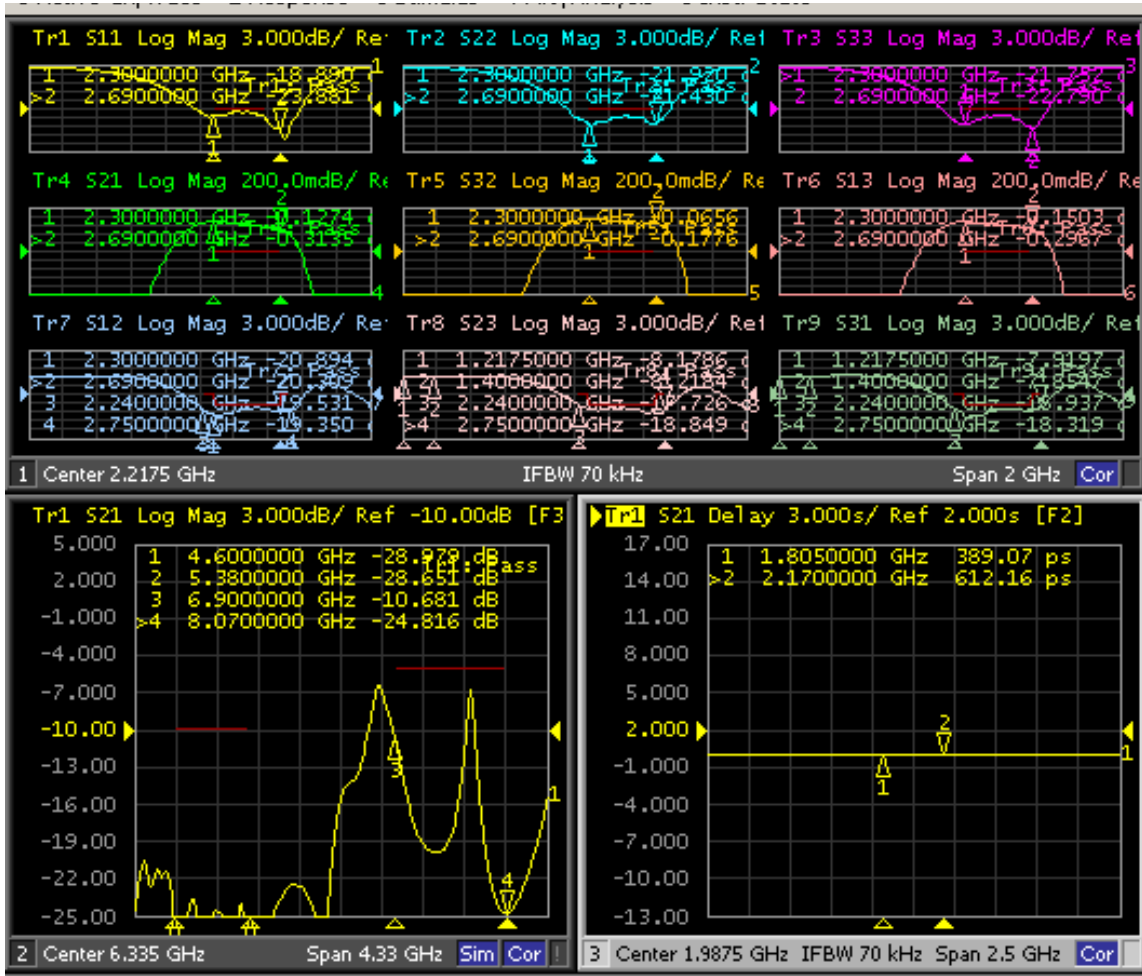

### Applications

- Telecom