


S Band Surface Mount Circulator

JCM3300T4000PT5RC

Description:

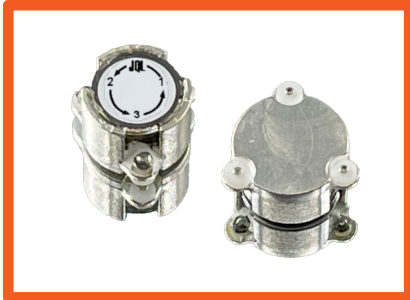


JCM3300T4000PT5RC is a surface mount circulator in the frequency 3.300~4.000GHz. The device is extremely stable over the temperature range of -40°C to +105°C, with maximum insertion loss of 0.45dB (0.35 Typ) and minimum return loss of 17.0dB (20.0 Typ). It can handle a CCW Power FWD/REV/PK(Watt) of 50/50/160

Electrical Specification

Part Number	JCM3300T4000PT5RC
Frequency (GHz)	3.300~4.000
Insertion Loss(dB)MAX	0.45(0.35 Typ)
Return Loss(dB)MIN	17.0(20.0 Typ)
Isolation(dB)MIN	17.0(20.0 Typ)
Operating Temperature	-40°C~105°C
Power FWD/REV/PK(Watt)	50/50/160


Outline

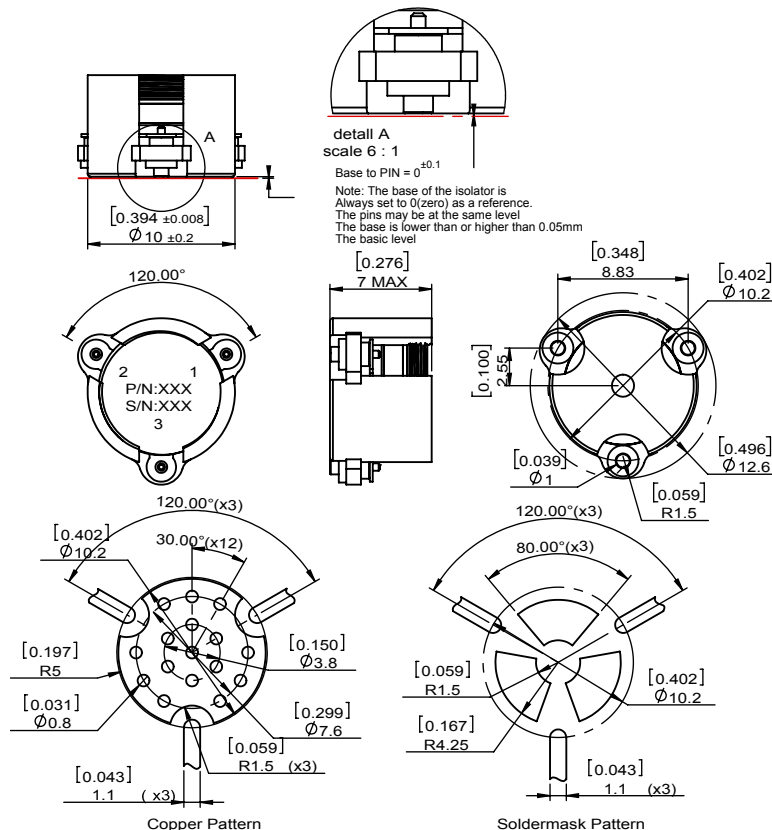

S Band Surface Mount Circulator

JCM3300T4000PT5RC

Test Data

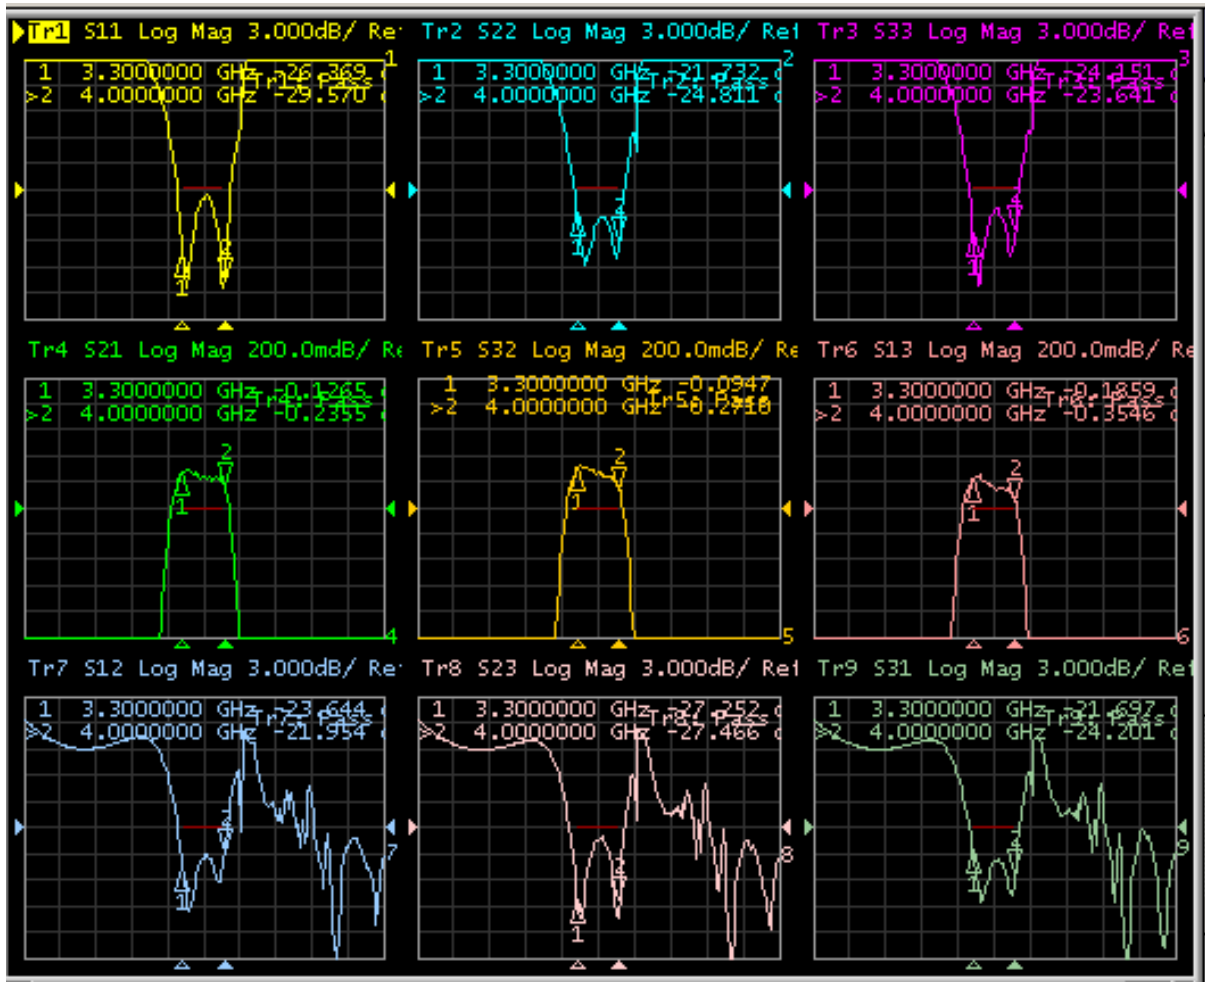

Applications

- 5G