

UHF Drop in Isolator

JID0851T0866SM5A3C

Description:




JID0851T0866SM5A3C is a drop-in isolator in the frequency 0.851~0.866GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3dB and minimum return loss of 20.0dB. It can handle a CCW Power FWD/REV/PK(Watt) of 50/50/-

Electrical Specification

Part Number	JID0851T0866SM5A3C
Frequency (GHz)	0.851~0.866
Insertion Loss(dB)	0.3
Isolation(dB)MIN	22.0
Return Loss(dB)	20.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	50/50/-
Tab(W×LG×THK)(mm[Inch])	0.64[.025]×2.5[0.098]×0.20[0.008]


Outline

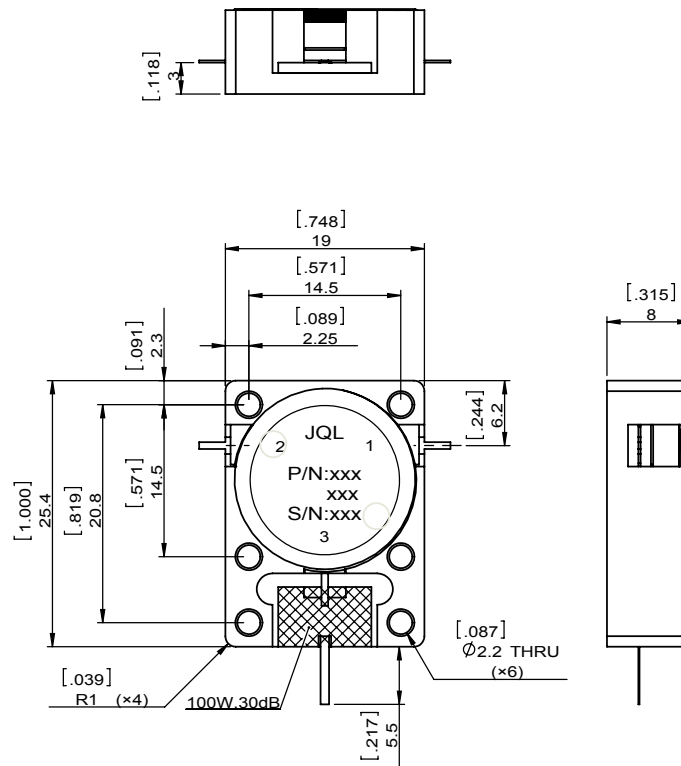

UHF Drop in Isolator

JID0851T0866SM5A3C

Test Data

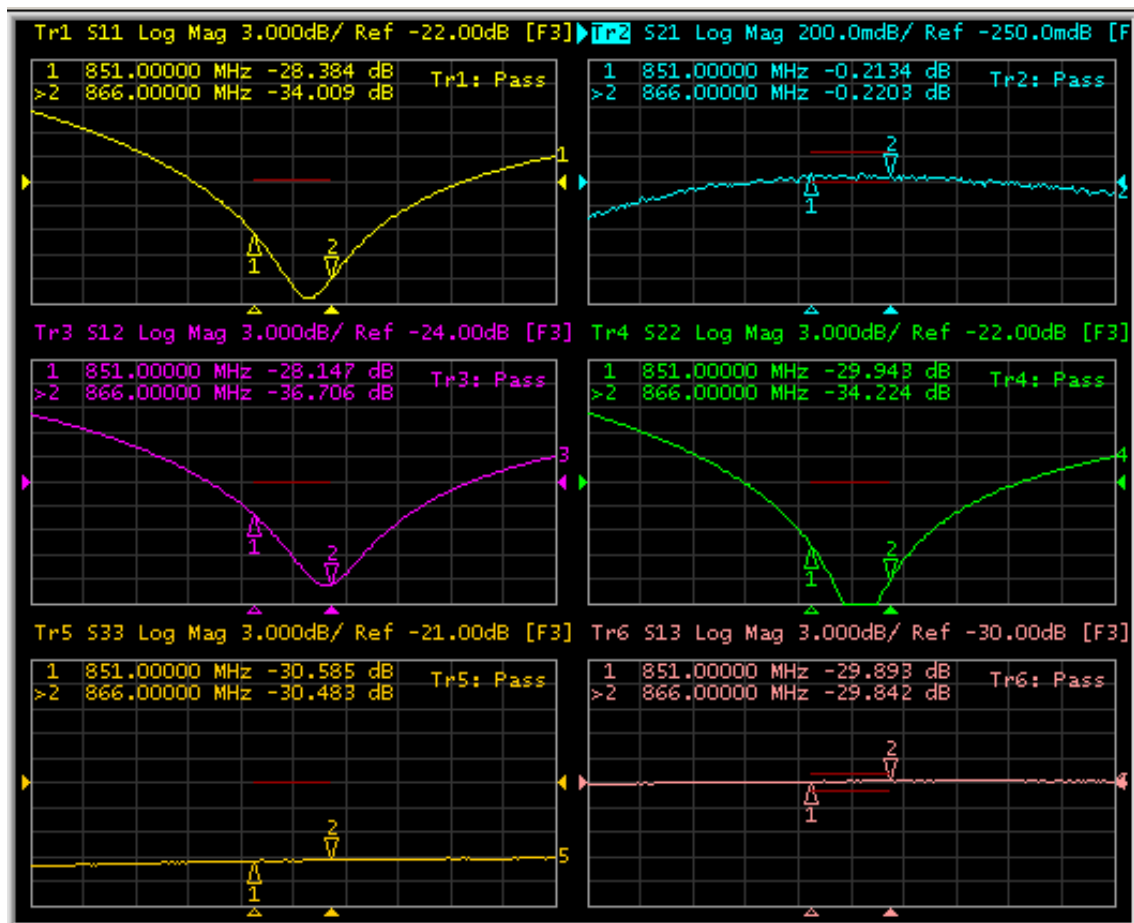

Applications

- Telecom