


C Band Drop-In Isolator

JID4400T5100SM15

Description:

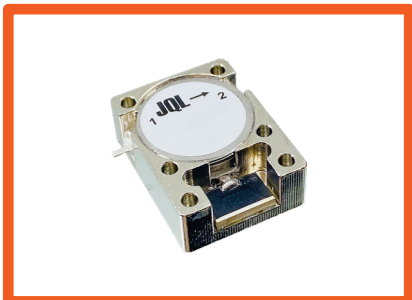


JID4400T5100SM15 is a C band drop-in Isolator in the frequency 4.400~5.100 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.40dB and minimum return loss of 20.0dB. It can handle Power FWD/REV/PK(Watt) of 150/150/300

Electrical Specification

Part Number	JID4400T5100SM15
Frequency (GHz)	4.400~5.100
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	150/150/300
Tab(W×LG×THK)(mm[Inch])	1.0[.039]X2.5[.098]X0.20[.008]


Outline

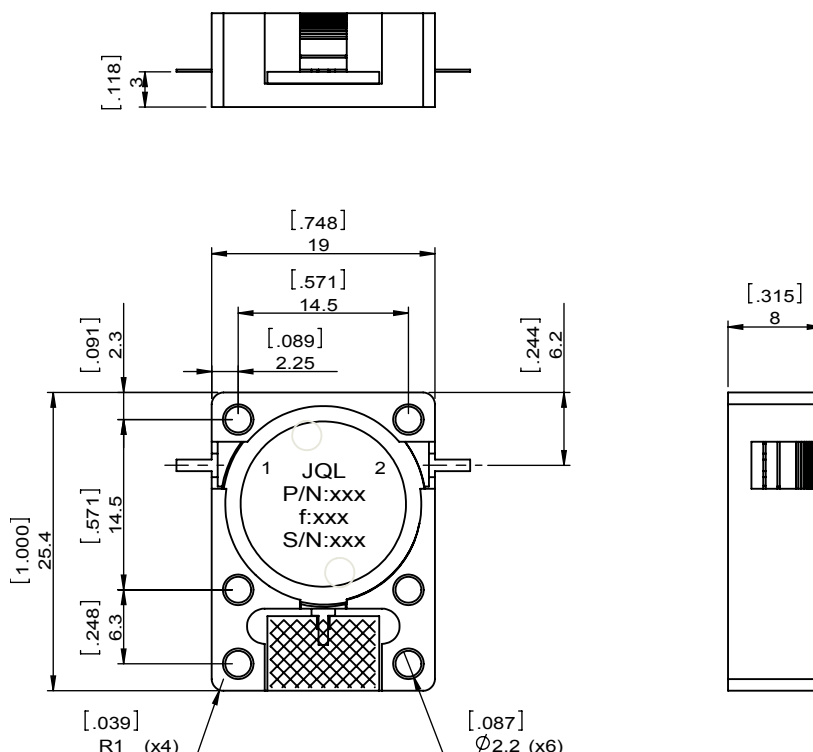

C Band Drop-In Isolator

JID4400T5100SM15

Test Data

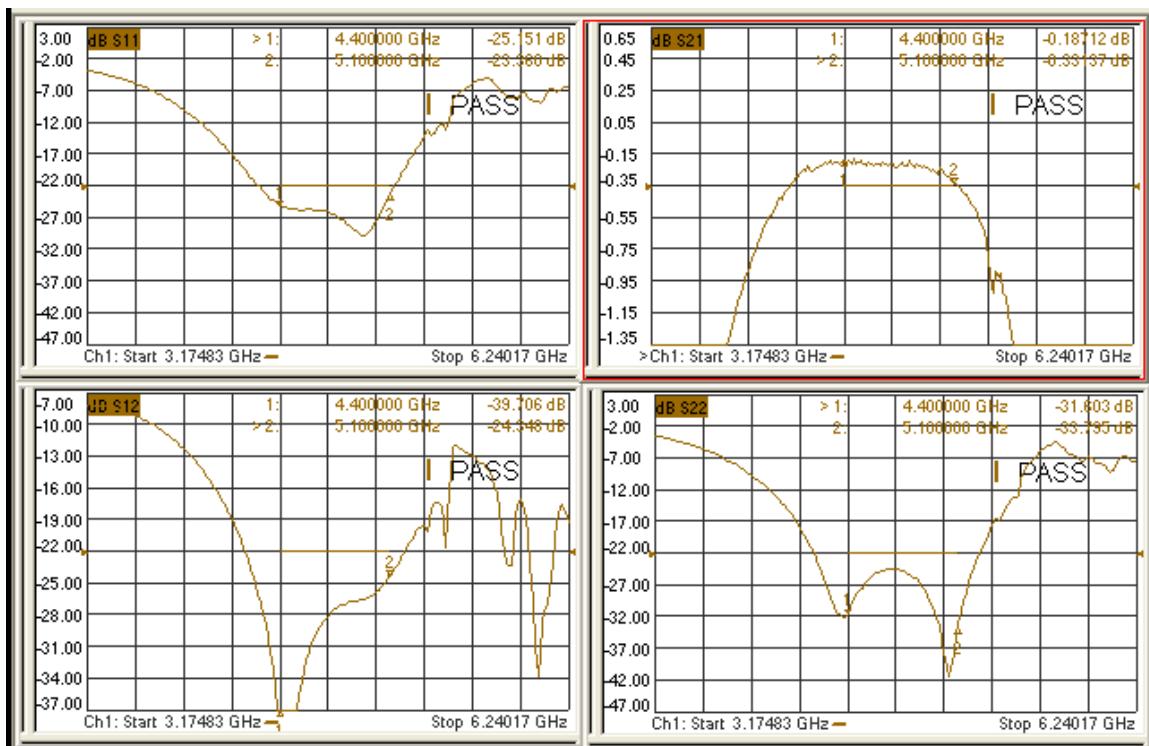

Applications

- Surveillance