

JIM1600T1640VM0

Electrical Specification

Part Number	J1M1600T1640VM0
Frequency (MHz)	1.600~1.640
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	21.0@-10~+85
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	1/1/-


Copper Pattern

Soldermask Pattern

L Band Surface Mount Isolator

JIM1600T1640VM0

Test Data

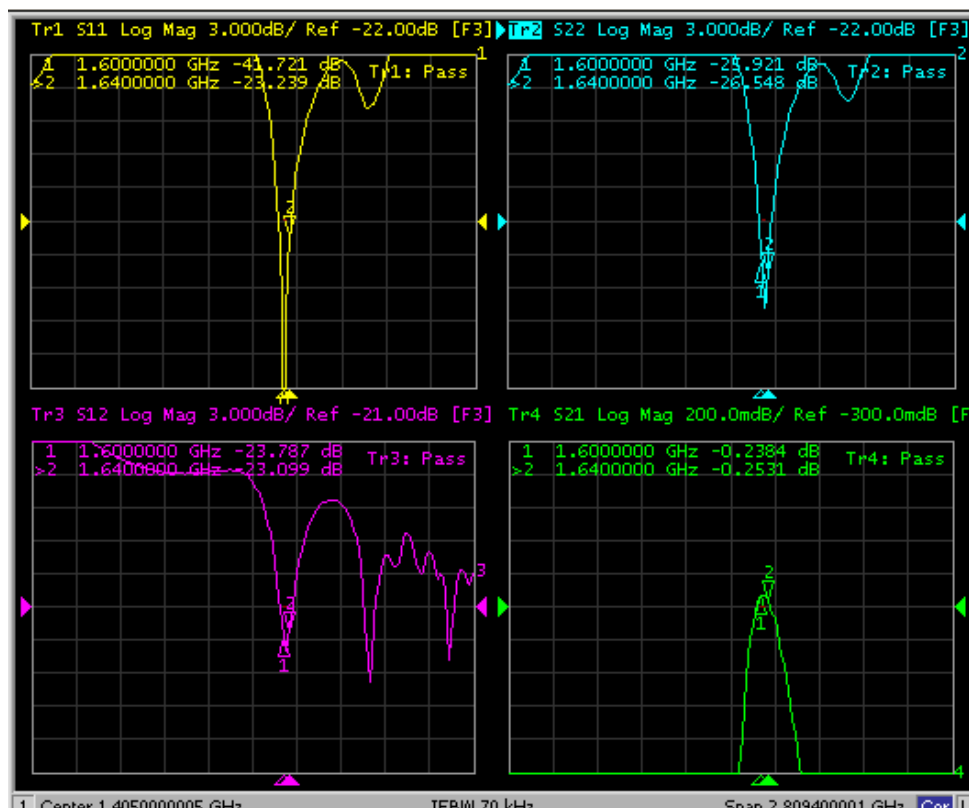

Application(s)

- Radar