

Surface Mount Isolator 17.1-21.3GHz

JIM17K1T21K3XM0

Description:




JIM17K1T21K3XM0 is a surface mount isolator in the frequency 17.100~21.300GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 1.20dB and minimum return loss of 15.0dB. It can handle a CW Power FWD/REV/P-K(Watt) of 2/2/-

Electrical Specification

Part Number	JIM17K1T21K3XM0
Frequency (GHz)	17.100~21.300
Insertion Loss(dB)MAX	1.20
Isolation(dB)MIN	15.0
Return Loss(dB)MIN	15.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	2/2/-


Outline

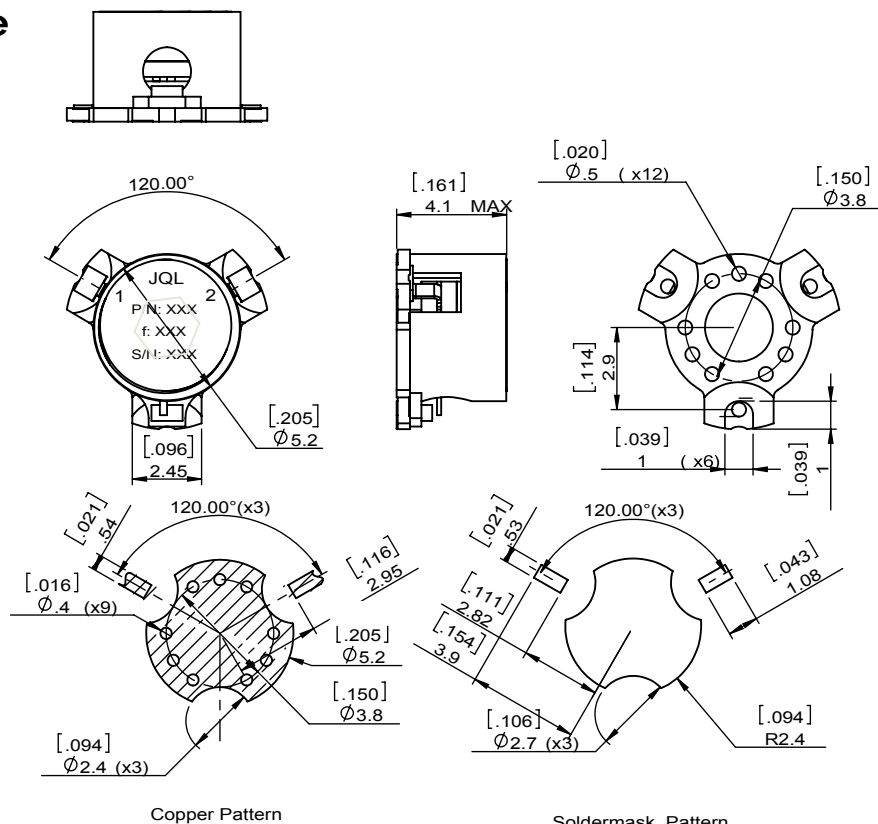

Surface Mount Isolator 17.1-21.3GHz

JIM17K1T21K3XM0

Test Data

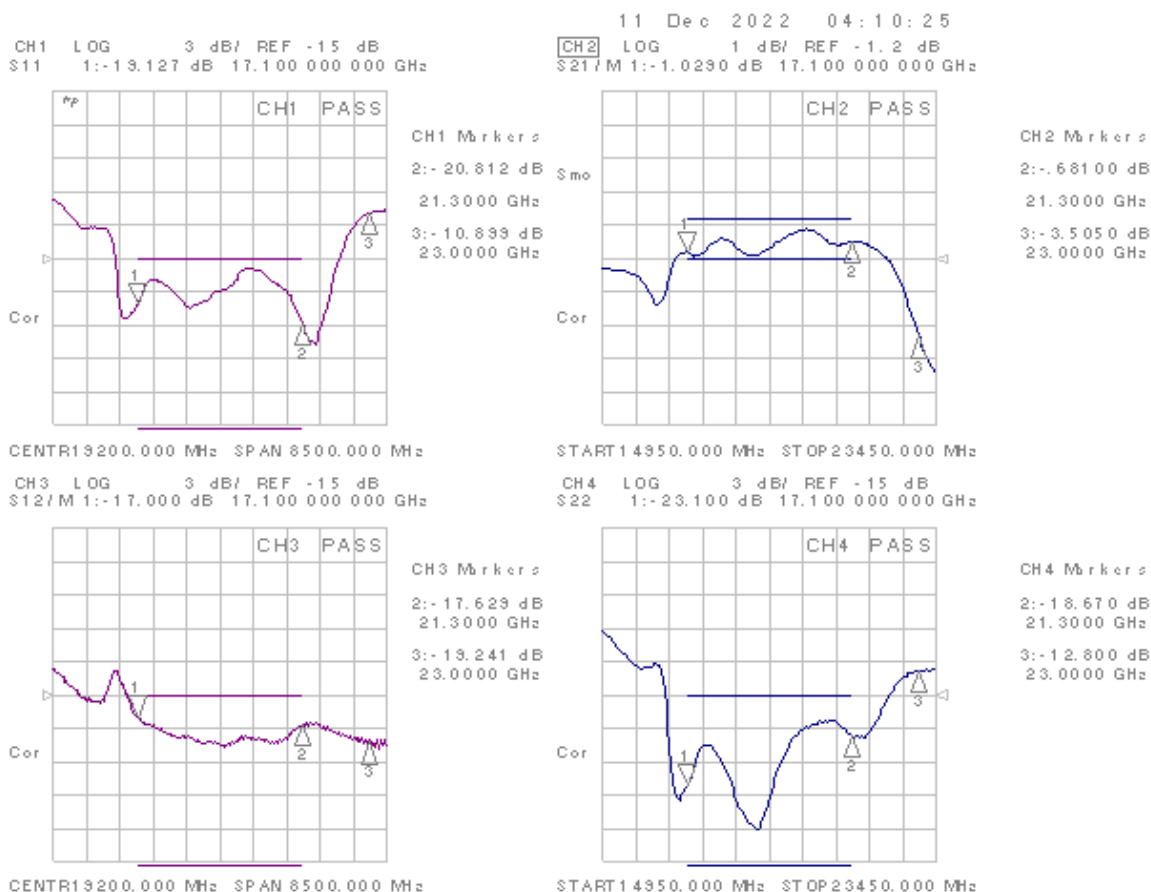

Applications

- Space