

S Band Surface Mount Isolator

JIM2170T2200VM0

Description:




JIM2170T2200VM0 is a surface mount isolator in the frequency 2.170~2.200GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.20dB and minimum return loss of 20.0dB. It can handle a CW Power FWD/REV/P-K(Watt) of -/-/4

Electrical Specification

Part Number	JIM2170T2200VM0
Frequency (GHz)	2.170~2.200
Insertion Loss(dB)MAX	0.20
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	-/-/4


Outline

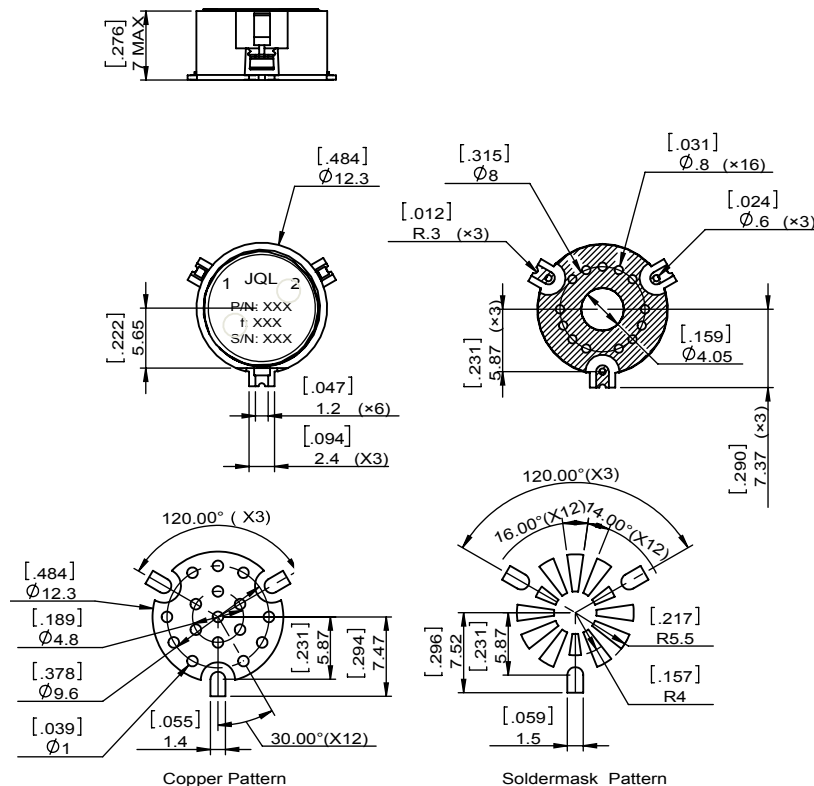

S Band Surface Mount Isolator

JIM2170T2200VM0

Test Data

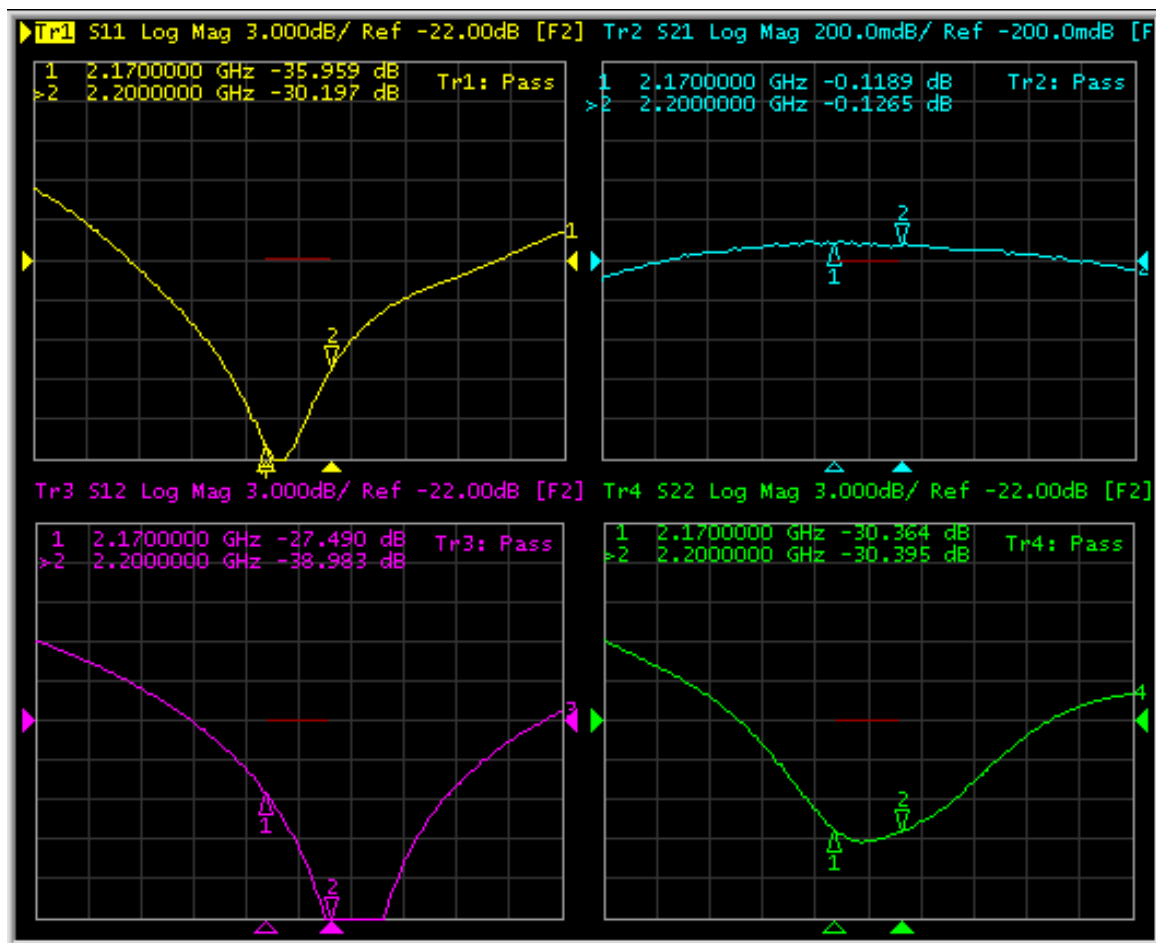

Applications

- 5G