
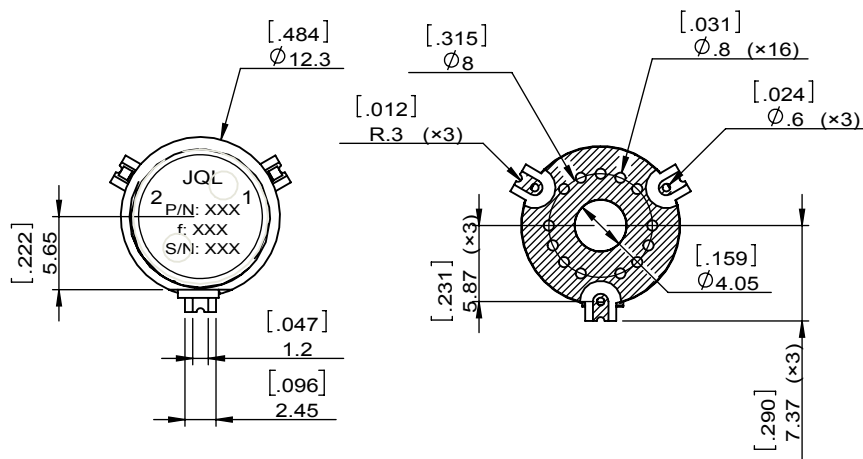


JIM3800T4600VM3RC

Electrical Specification

Part Number	JIM3800T4600VM3RC
Frequency (GHz)	3.800~4.600
Insertion Loss(dB)MAX	0.5@3.800~4.200GHz(0.6 @+125°C 0.4@4.200~4.600GHz(0.5 @+125°C)
Isolation(dB)MIN	17@3.800~4.200GHz(15@+100°C, 13@+125°C) 20@4.200~4.600GHz(18.0 @+125°C)
Return Loss(dB)MIN	17@3.800~4.200GHz(15@+100°C, 13@+125°C) 20@4.200~4.600GHz(18.0 @+125°C)
Operating Temperature	-40°C~+125°C
Power FWD/REV/PK(Watt)	30/10/-


Outline



S Band Surface Mount Isolator

JIM3800T4600VM3RC

Test Data

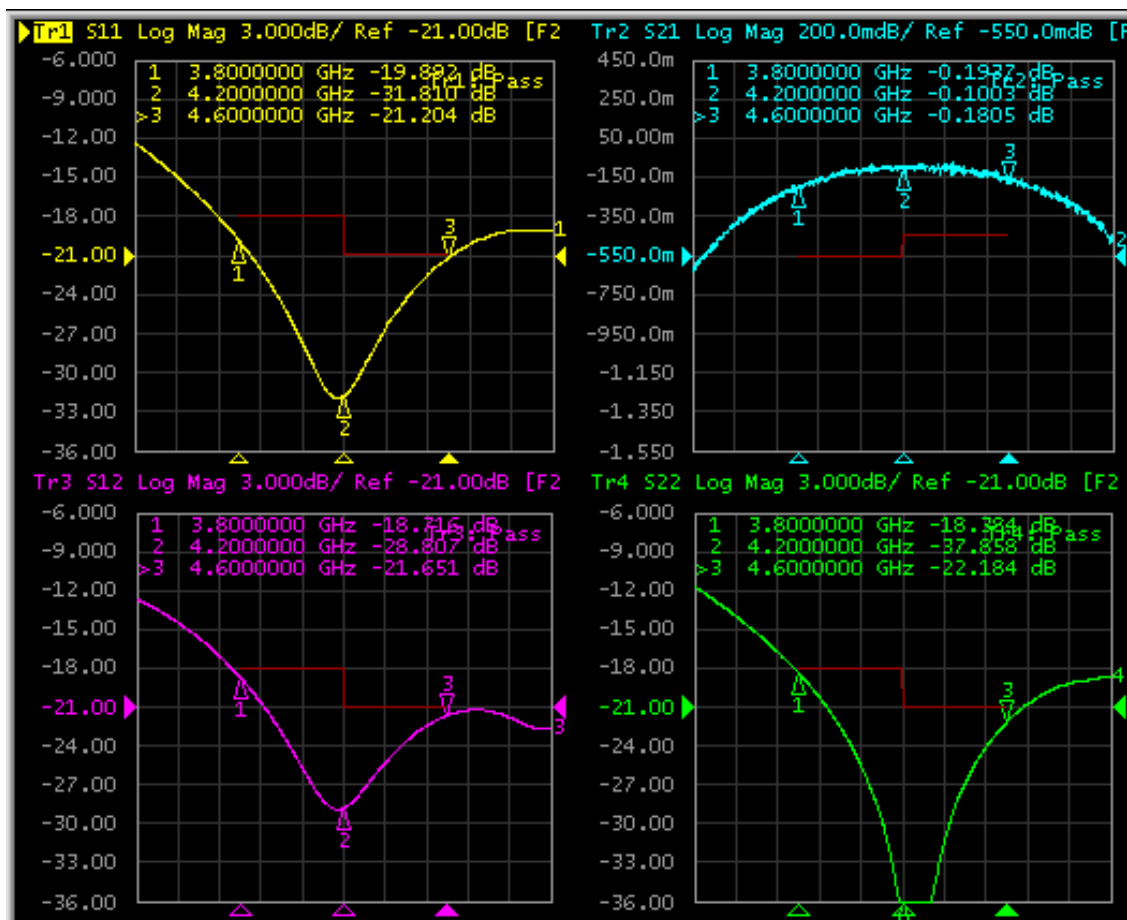

Applications

- 5G