
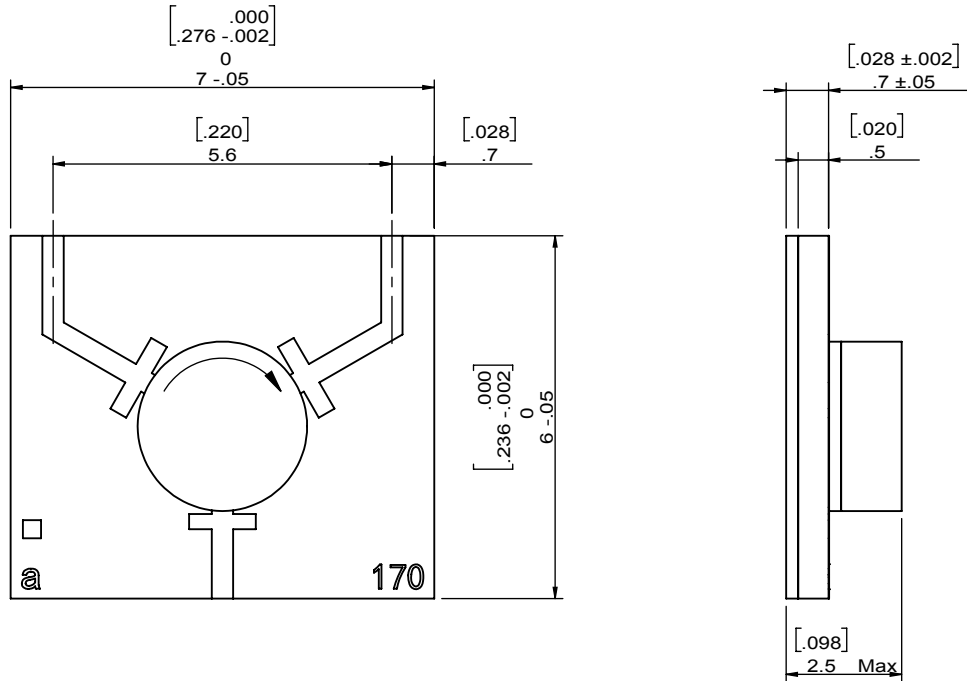


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	X.S	DATE	09.21.2022	APPROVED	HC.Qiu

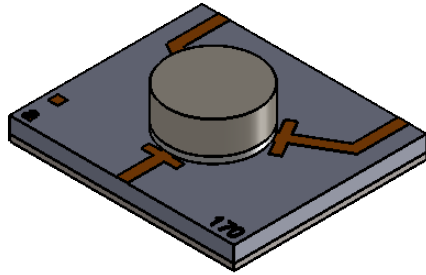

ITEM	SPEC
Frequency Rang(GHz)	16.700~17.300
Direction	CW
Insertion Loss(dB)	0.6 Max
Return Loss(dB)	17.7 Min
Isolation(dB)	18 Min
Power(W)	15 Max
Operating Temperature(°C)	-55~+100
Impedance(Ω)	50
Additional Notes	-

Notes :

1. Mounting: +150°C@60min.
2. RoHS and REACH compliant.
3. Humidity 5 to 95% non-condensing.
4. Max temperature during welding process : +350°C @25 msec.
5. Heat sink temperature must not exceed the maximum operating temperature specified.



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

**JQL JQL Technologies Corporation**

<b>MATERIAL:</b> -	<b>DWG NO:</b> 2CMC-17-9BW3.53W15			
<b>SURFACE TREATMENT:</b> -	DWG BY:	X.S	09.21.2022	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> Microstrip Circulator	APPV'D BY:			6:1
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4