

JCD0400T0450UM60

Electrical Specification

Part Number	JCD0400T0450UM60
Frequency (GHz)	0.400~0.450
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	15.0
Operating Temperature	-20°C~+70°C
Power FWD/REV/PK(Watt)	600/600/-
Tab(W×LG×THK)(mm[Inch])	1.27[0.05]x4[0.157]x0.2[0.008]

Front View:

- Overall width: [2.008] 51
- Inner width: [1.654] 42
- Overall height: [2.008] 51
- Inner height: [1.654] 42
- Top mounting holes: 3[.118]×45° (x4)
- Bottom mounting hole: Ø3.5 THRU(x4)
- Center label: JQL, P/N:xxx, f:xxx, S/N:xxx
- Port numbers: 1, 2, 3

Top View:

- Overall width: [2.008] 51
- Inner width: [1.654] 42
- Height from center to top edge: [.492] 12.5
- Mounting hole diameter: [.138]


Side View:

- Overall height: [.571] 14.5
- Top flange thickness: [.157] 4

UHF Band Drop-In Circulator

JCD0400T0450UM60

Test Data

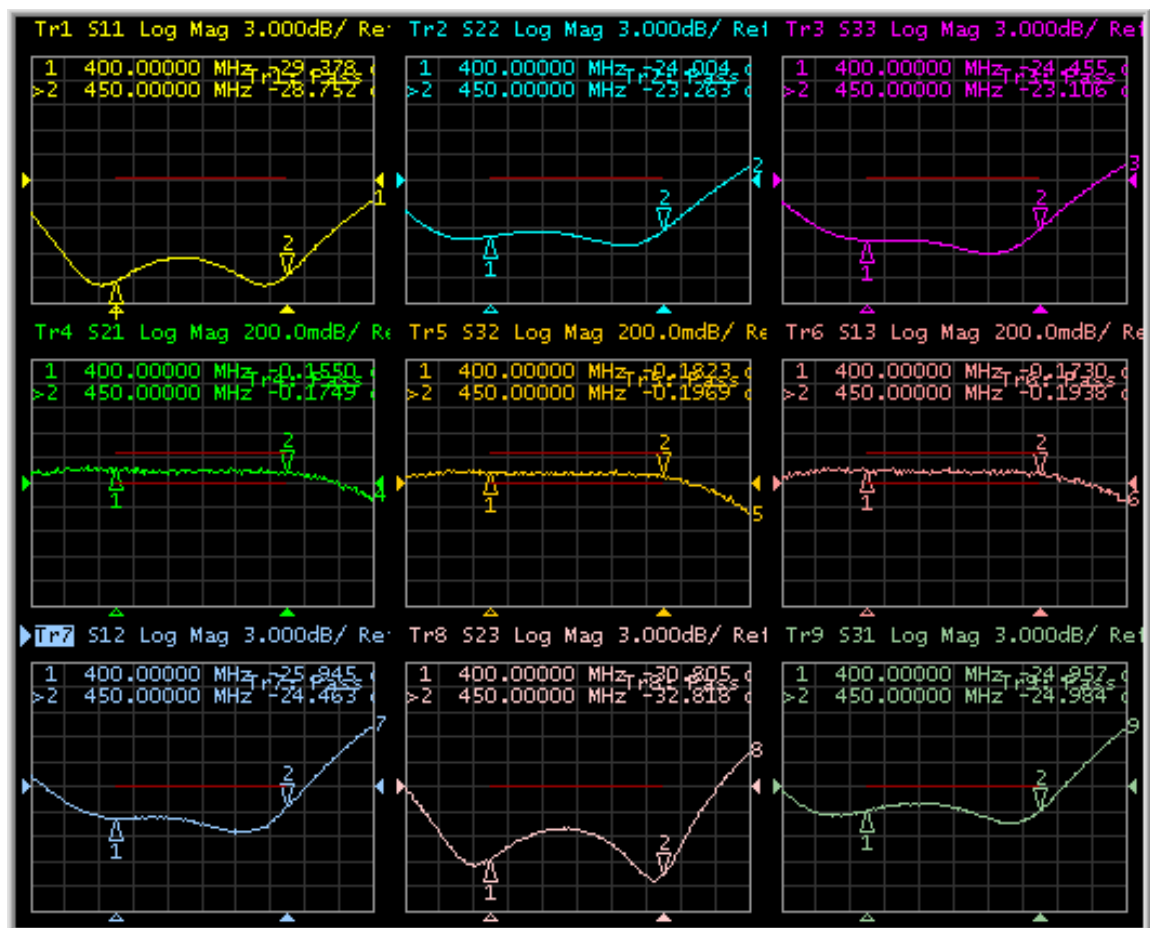

Applications

- Public Safety