


JCD3300T3700SM10

Electrical Specification

Part Number	JCD3300T3700SM10
Frequency (MHz)	3.300~3.700
Insertion Loss(dB)MAX	0.18@+25℃ 0.23@-40~-+85℃ 0.40@+85~+125℃
Isolation(dB)MIN	21.0@-40~-+85℃ 19.0@+85~+125℃
Return Loss(dB)MIN	21.0@-40~-+85℃ 19.0@+85~+125℃
Operating Temperature	-40℃~+125℃
Power FWD/REV/PK(Watt)	60/60/400
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]


Top view of the device. It shows a central rectangular area with horizontal lines, two circular features on either side, and a dimension line indicating a width of 3 units.

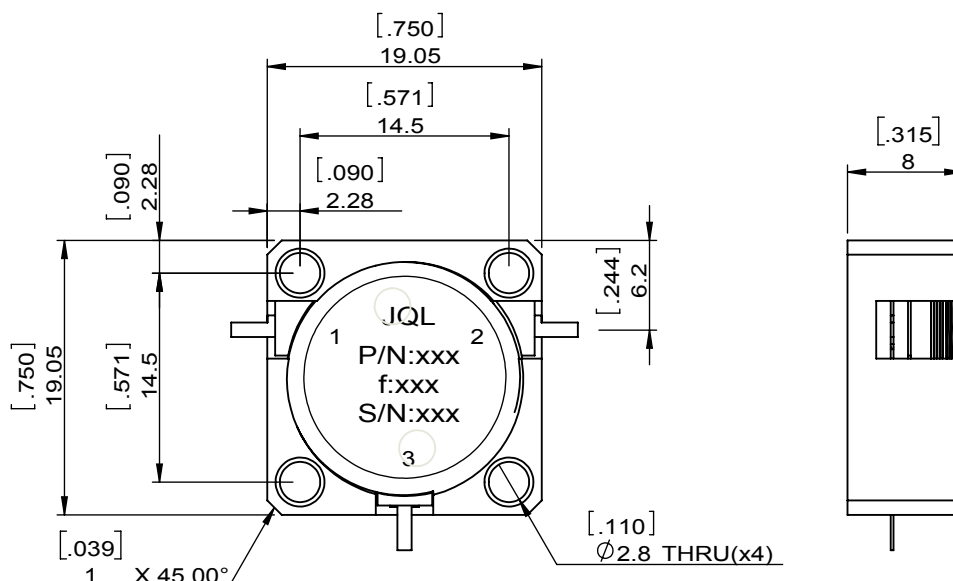

S Band Drop-In Circulator

JCD3300T3700SM10

Test Data

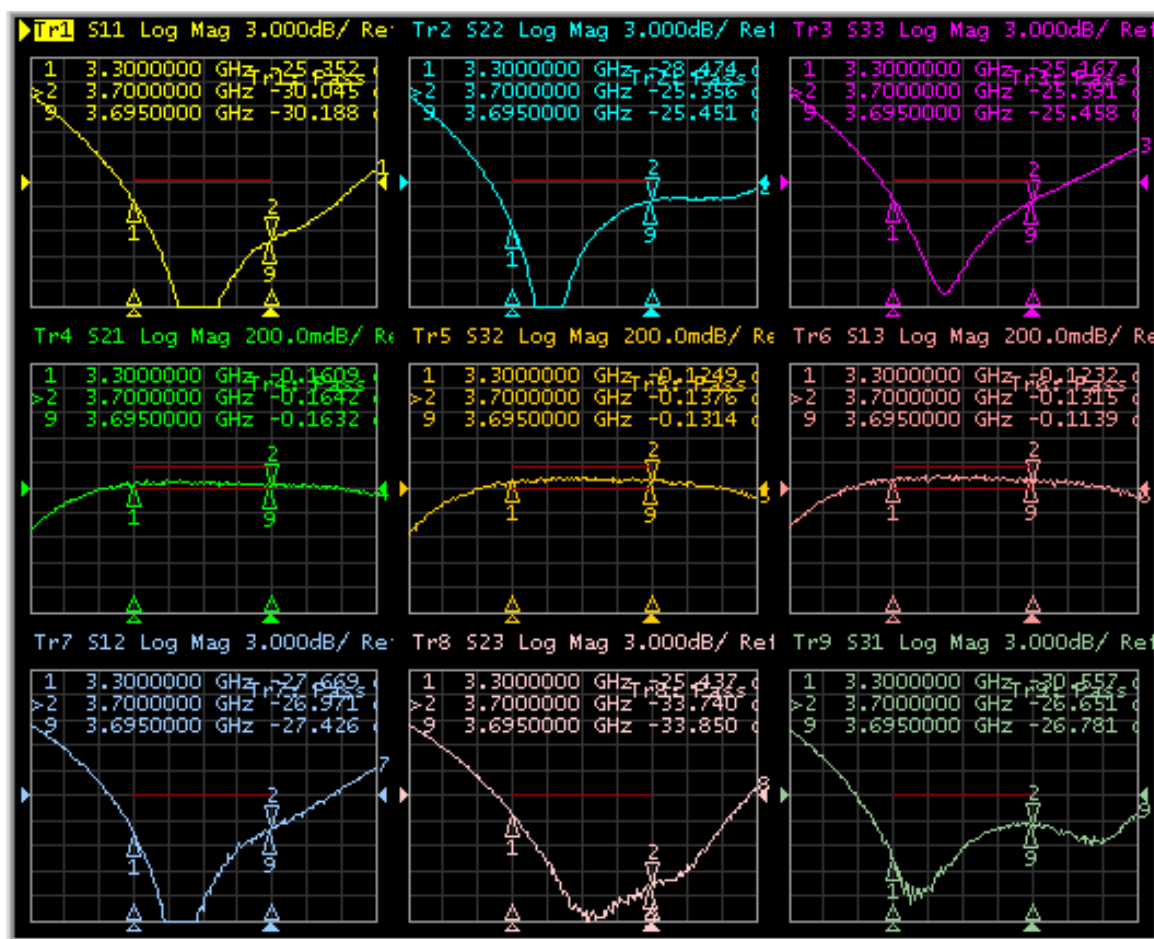

Applications

- Telecom