

S Band Surface Mount Circulator

JCM3300T3700PK10

Description:




JCM3300T3700PK10 is a surface mount circulator in the frequency 3.300~3.700 GHz. The device is extremely stable over the temperature range of -40°C to +105°C, with maximum insertion loss of 0.3dB and minimum return loss of 21.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/1500

Electrical Specification

Part Number	JCM3300T3700PK10
Frequency (GHz)	3.300~3.700
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	21.0
Operating Temperature	-40°C~105°C
Power FWD/REV/PK(Watt)	100/100/1500


Outline

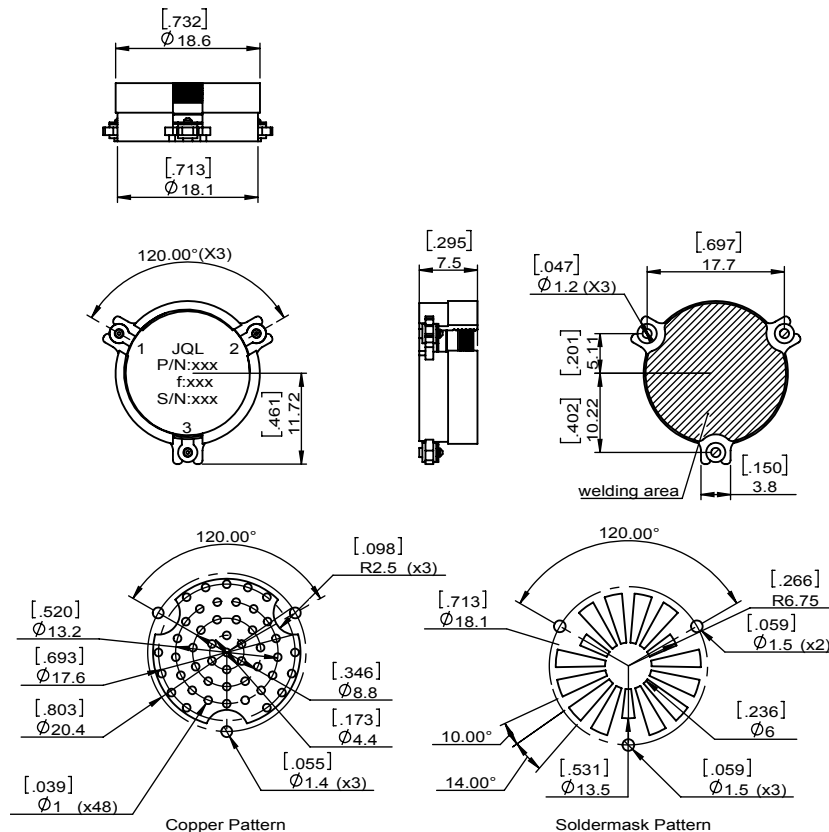

S Band Surface Mount Circulator

JCM3300T3700PK10

Test Data

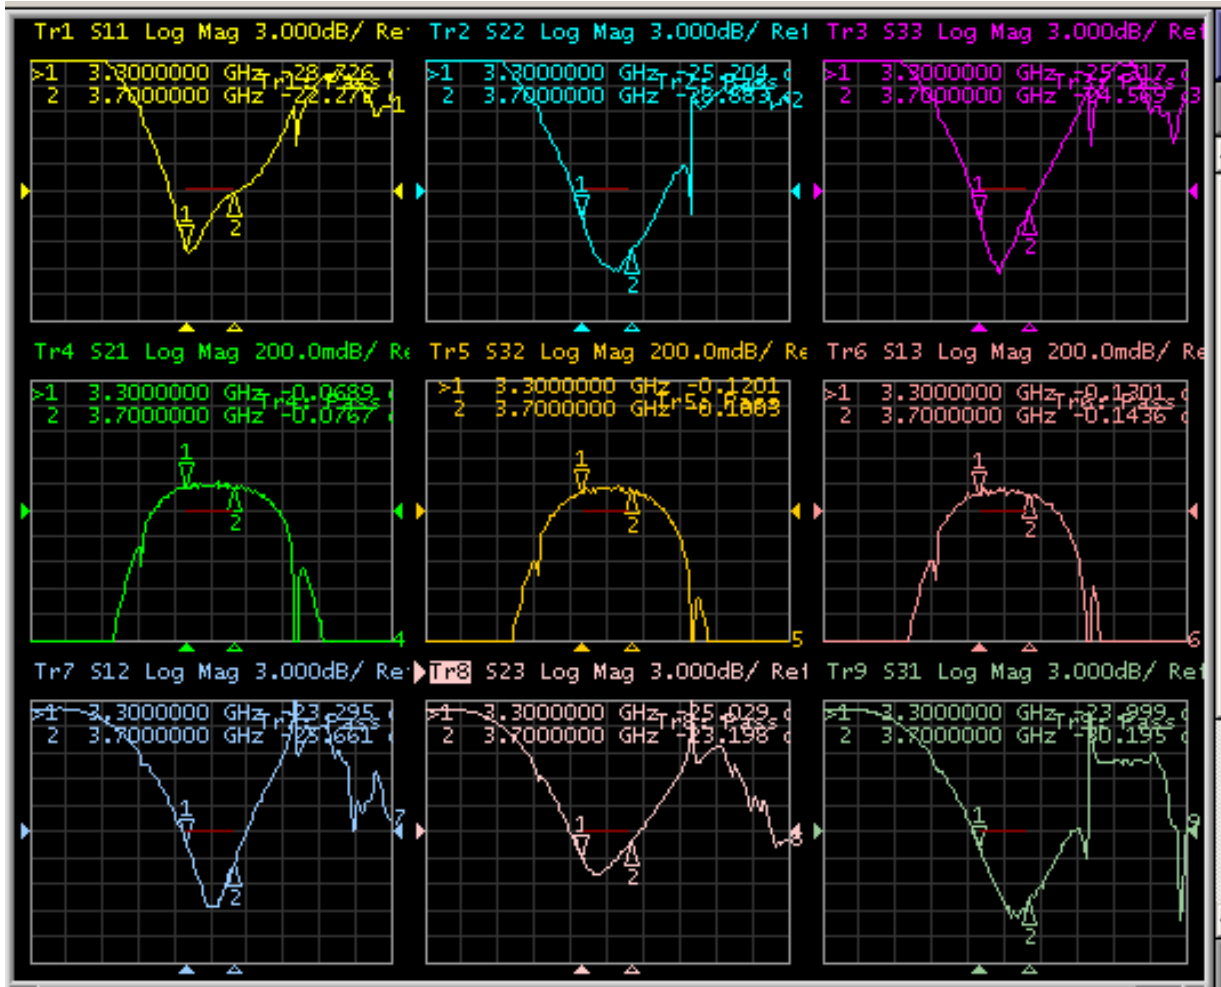

Applications

- Radar