

UHF Band Drop-In Isolator

JID0617T0960KM2C

Description:




JID0617T0960KM2C is a UHF band drop-in isolator in the frequency 0.617~0.960GHz. The device is extremely stable over the temperature range of -20°C to +85°C, with maximum insertion loss of 0.9dB and minimum return loss of 14.0dB. It can handle Power FWD/REV/PK(Watt) of 50/20/-

Electrical Specification

Part Number	JID0617T0960KM2C
Frequency (GHz)	0.617~0.960
Insertion Loss(dB)	0.9
Isolation(dB)MIN	14.0
Return Loss(dB)	14.0
Operating Temperature	-20°C~+85°C
Power FWD/REV/PK(Watt)	50/20/-
Tab(W×LG×THK)(mm[Inch])	1.3(0.051)×5.0[0.197]×0.25[0.010]


Outline

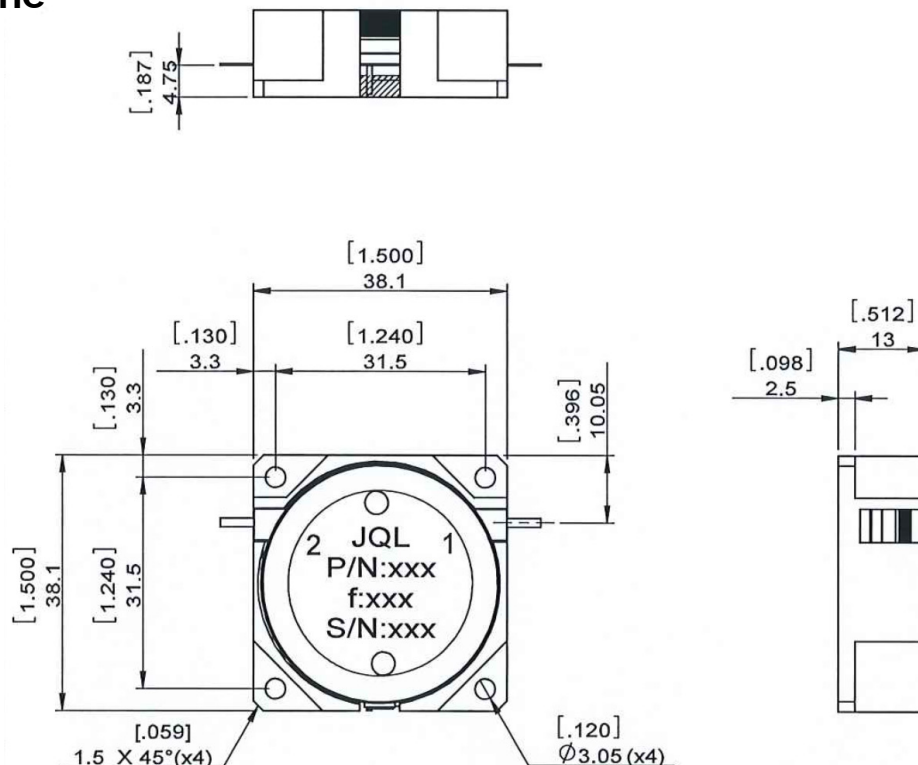

UHF Band Drop-In Isolator

JID0617T0960KM2C

Test Data

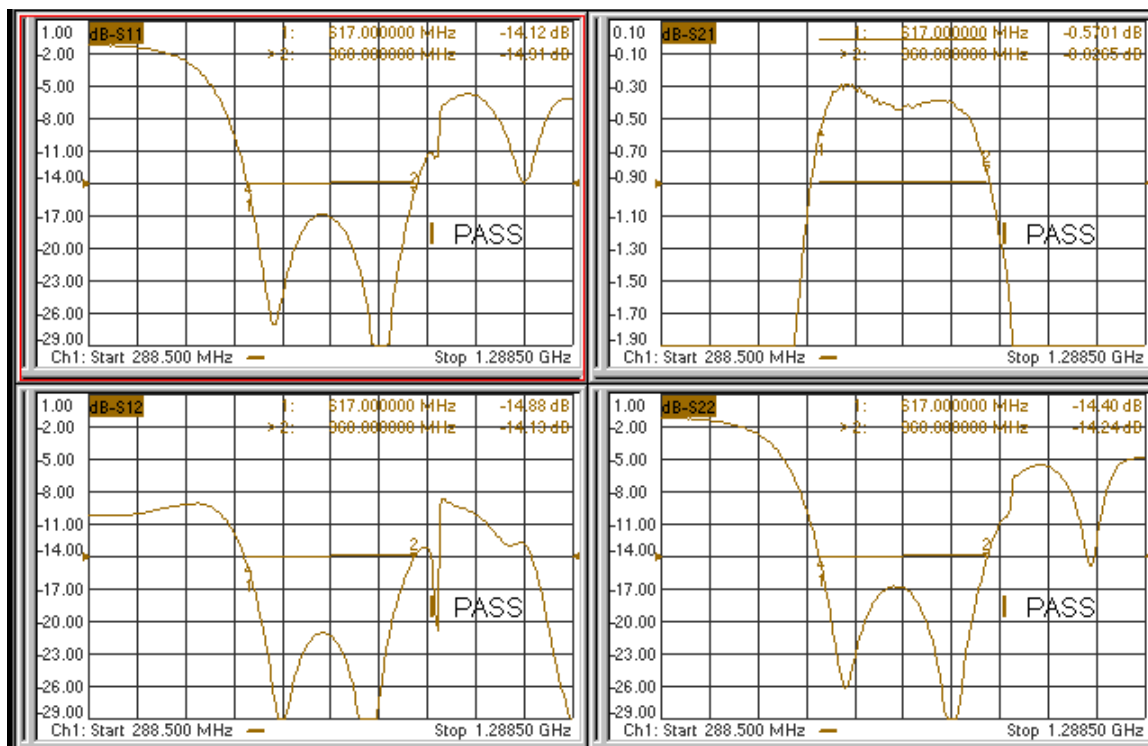

Applications

- Telecom