

UHF Band Surface Mount Isolator

JIM0925T0960S1R

Description:




JIM0925T0960S1R is a surface mount isolator in the frequency 0.925~0.960GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 21.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 10/5/-

Electrical Specification

Part Number	JIM0925T0960S1R
Frequency (GHz)	0.925~0.960
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	21.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	10/5/-


Outline

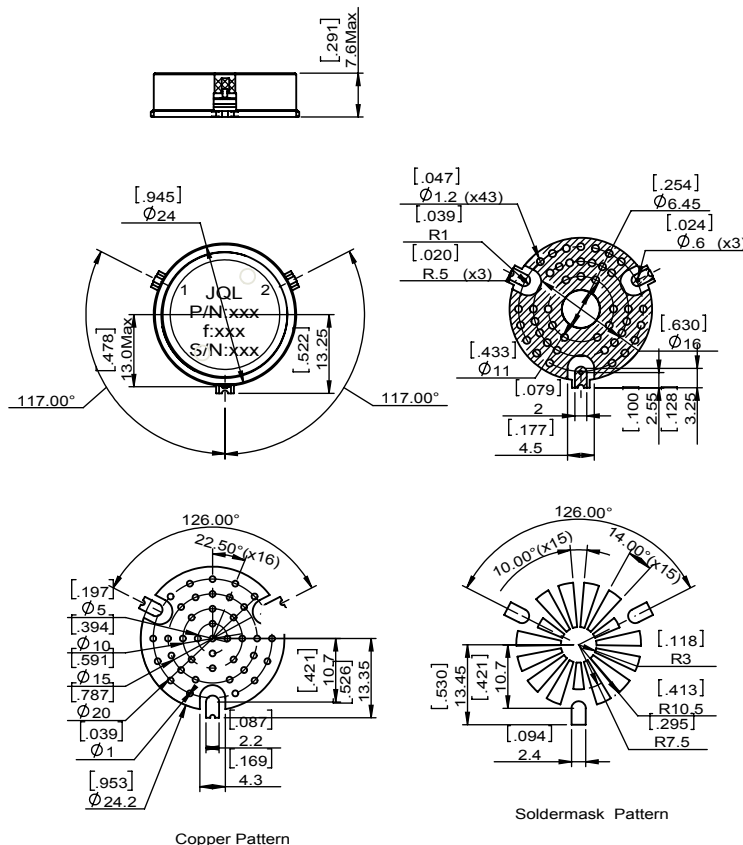

UHF Band Surface Mount Isolator

JIM0925T0960S1R

Test Data

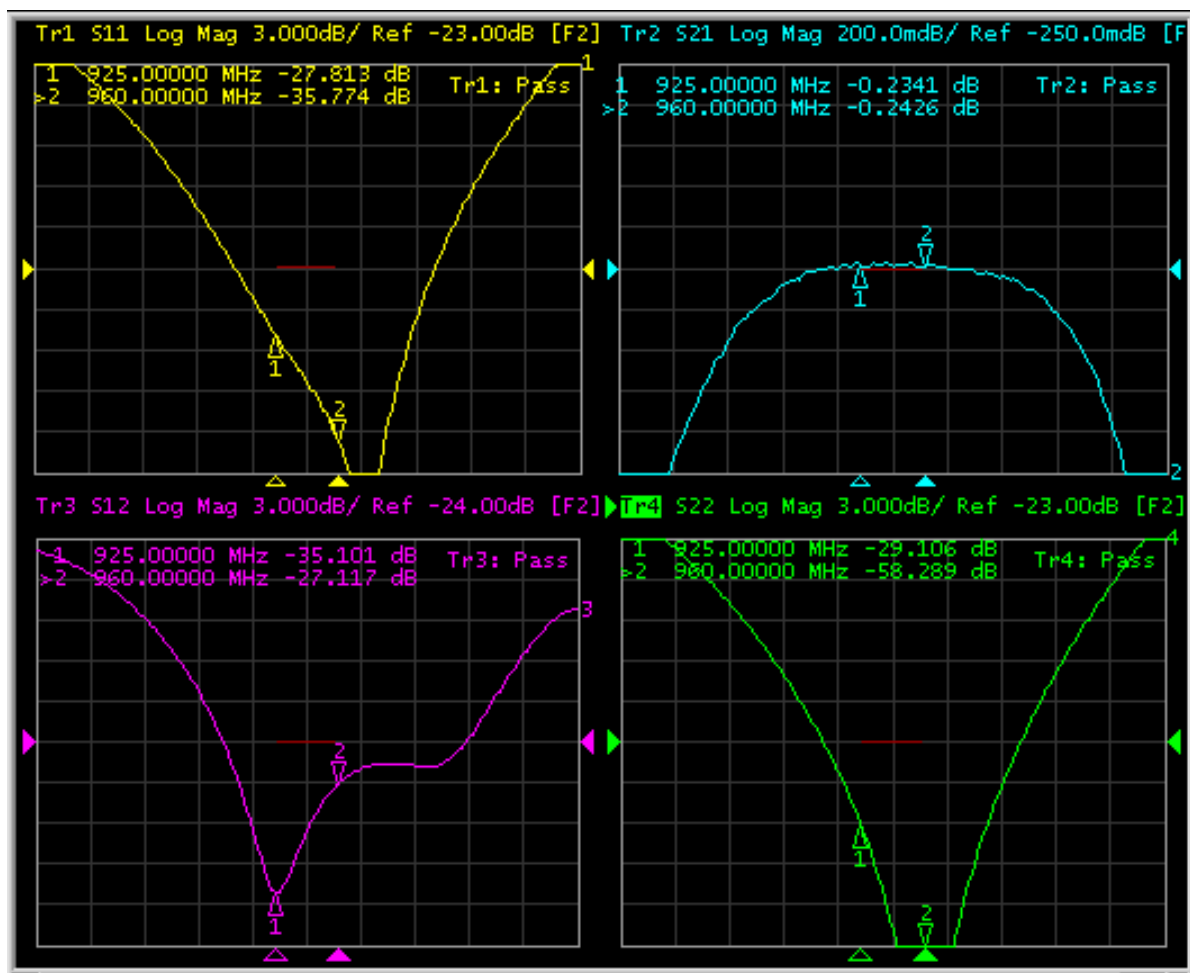

Applications

- Telecom