


# UHF Band Dual Coaxial Circulator

## JC2C0172T0174T10N15

### Description:

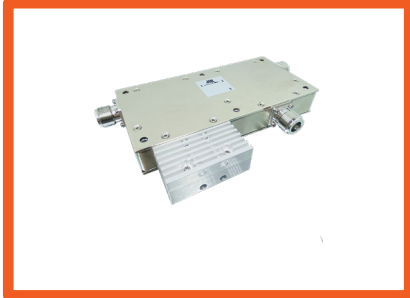


JC2C0172T0174T10N15 is a dual coaxial circulator in the frequency 0.172~0.174GHz. The device is extremely stable over the temperature range of 0°C to +65°C, with maximum insertion loss of 0.4 PER JUNCTION and minimum return loss of 20.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 150/150/-

### Electrical Specification

| Part Number            | JC2C0172T0174T10N15 |
|------------------------|---------------------|
| Frequency (GHz)        | 0.172~0.174         |
| Insertion Loss(dB)MAX  | 0.4 PER JUNCTION    |
| Isolation(dB)MIN       | 20.0 PER JUNCTION   |
| Return Loss(dB)MIN     | 20.0                |
| Operating Temperature  | 0°C~60°C            |
| Power FWD/REV/PK(Watt) | 150/150/-           |


### Outline

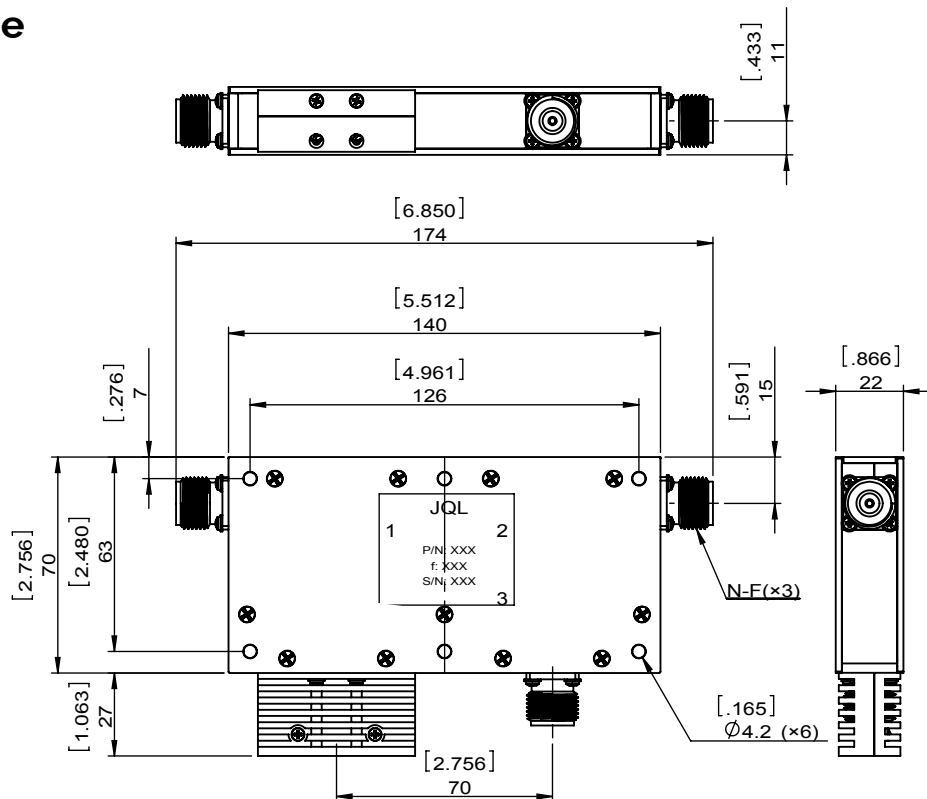

# UHF Band Dual Coaxial Circulator

JC2C0172T0174T10N15

## Test Data

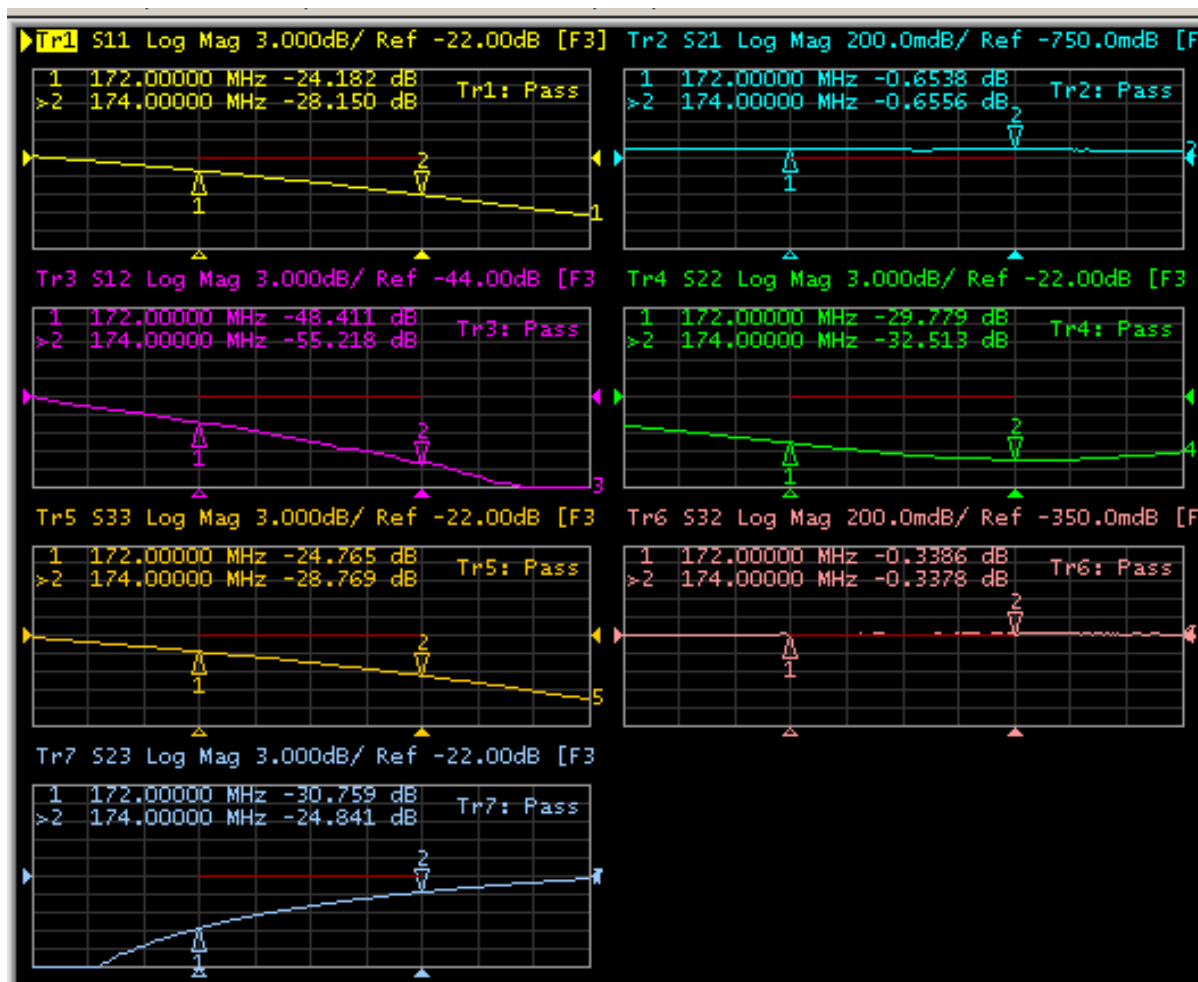

## Applications

- Public Safety