


UHF Band Drop-In Circulator

JCD0758T0803SM20

Description:

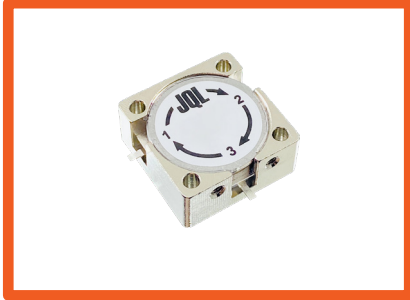


JCD0758T0803SM20 is a drop-in circulator in the frequency 0.758~0.803 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3dB and minimum return loss of 20.0dB. It can handle CW Power FWD/REV/PK(Watt) of 200/200/-

Electrical Specification

Part Number	JCD0758T0803SM20
Frequency (GHz)	0.758~0.803
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power Handling(Watt)	200/200/-
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]


Outline

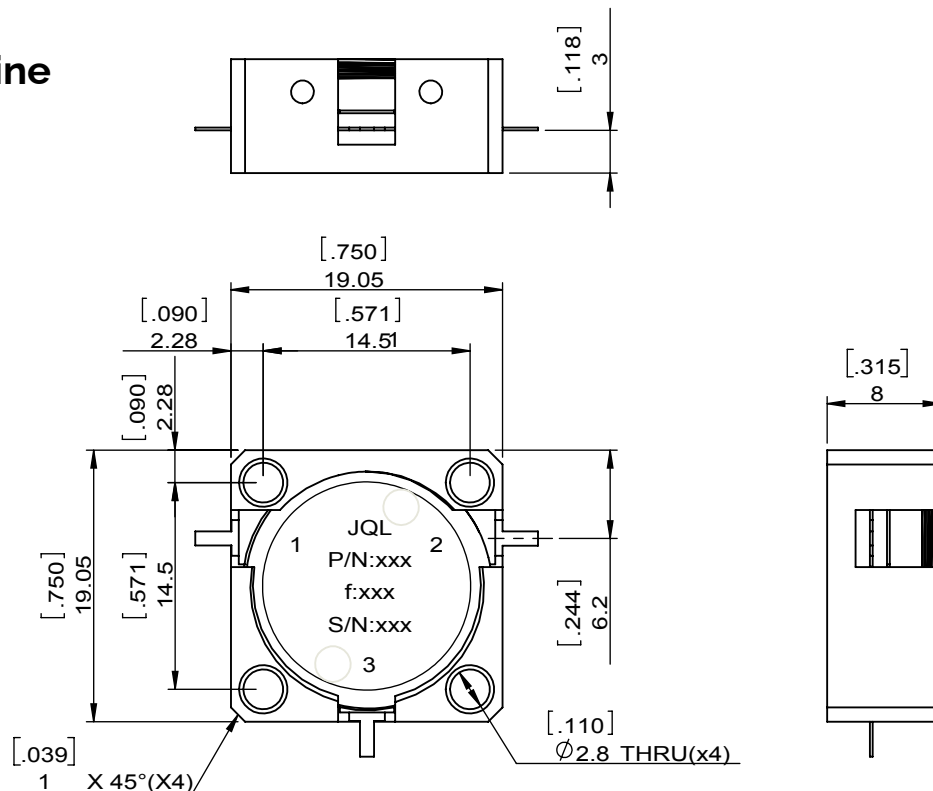

UHF Band Drop-In Circulator

JCD0758T0803SM20

Test Data

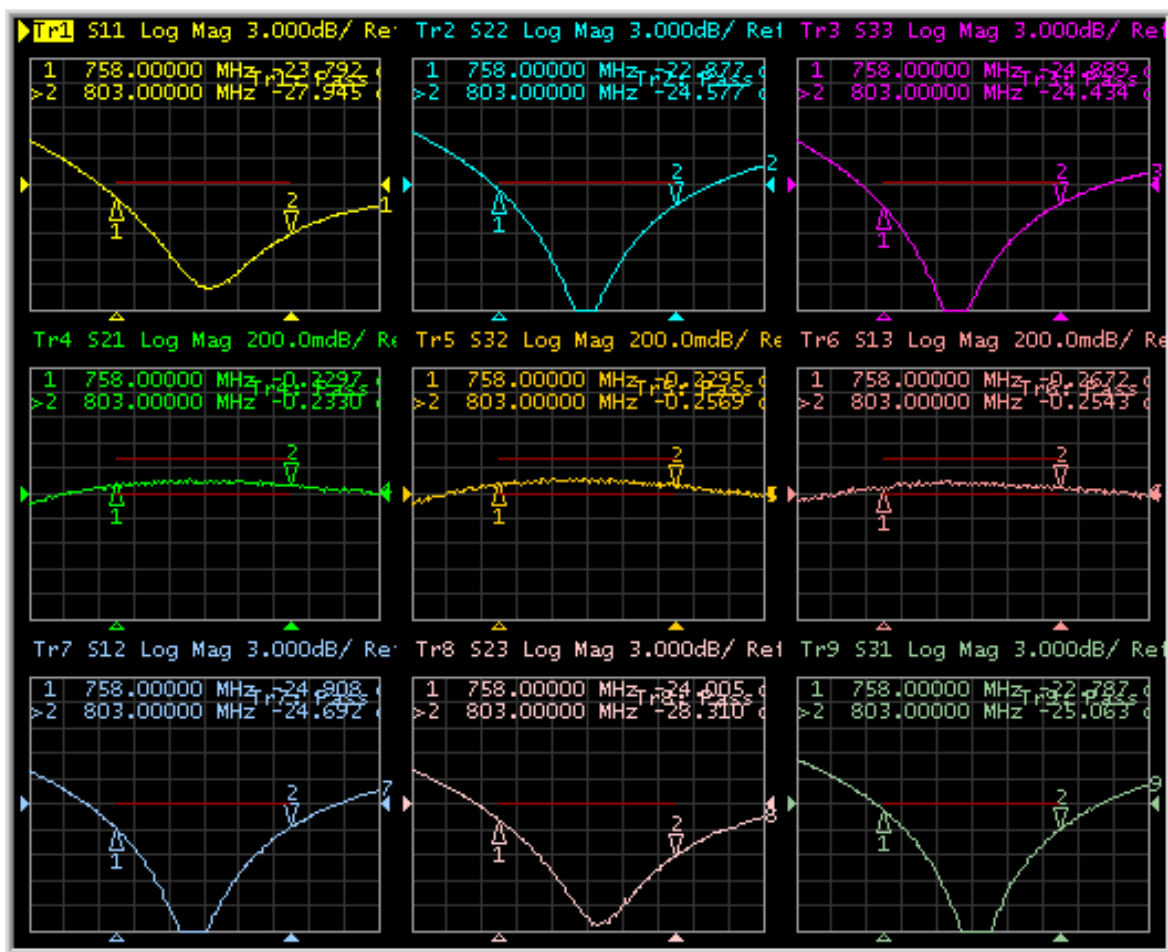

Applications

- Telecom