

UHF Band Surface Mount Circulator

JCM0791T0821S10R

Description:




JCM0791T0821S10R is a surface mount circulator in the frequency 0.791~0.821 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.35 dB and minimum return loss of 20 dB. This circulator can handle a CW power of FWD/ REV 100/100/-

Electrical Specification

Part Number	JCM0791T0821S10R
Frequency (MHz)	0.791~0.821
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

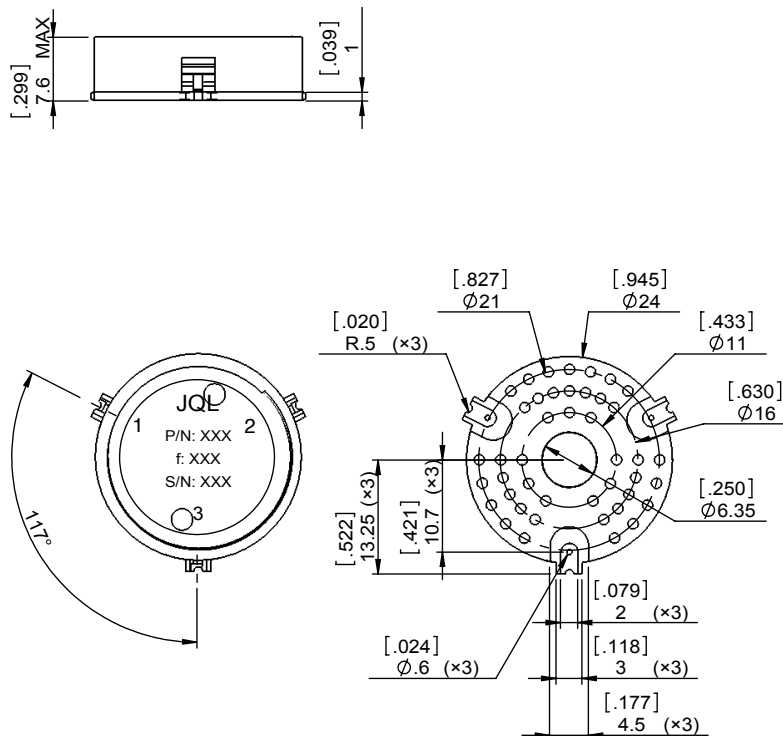

UHF Band Surface Mount Circulator

JCM0791T0821S10R

Test Data

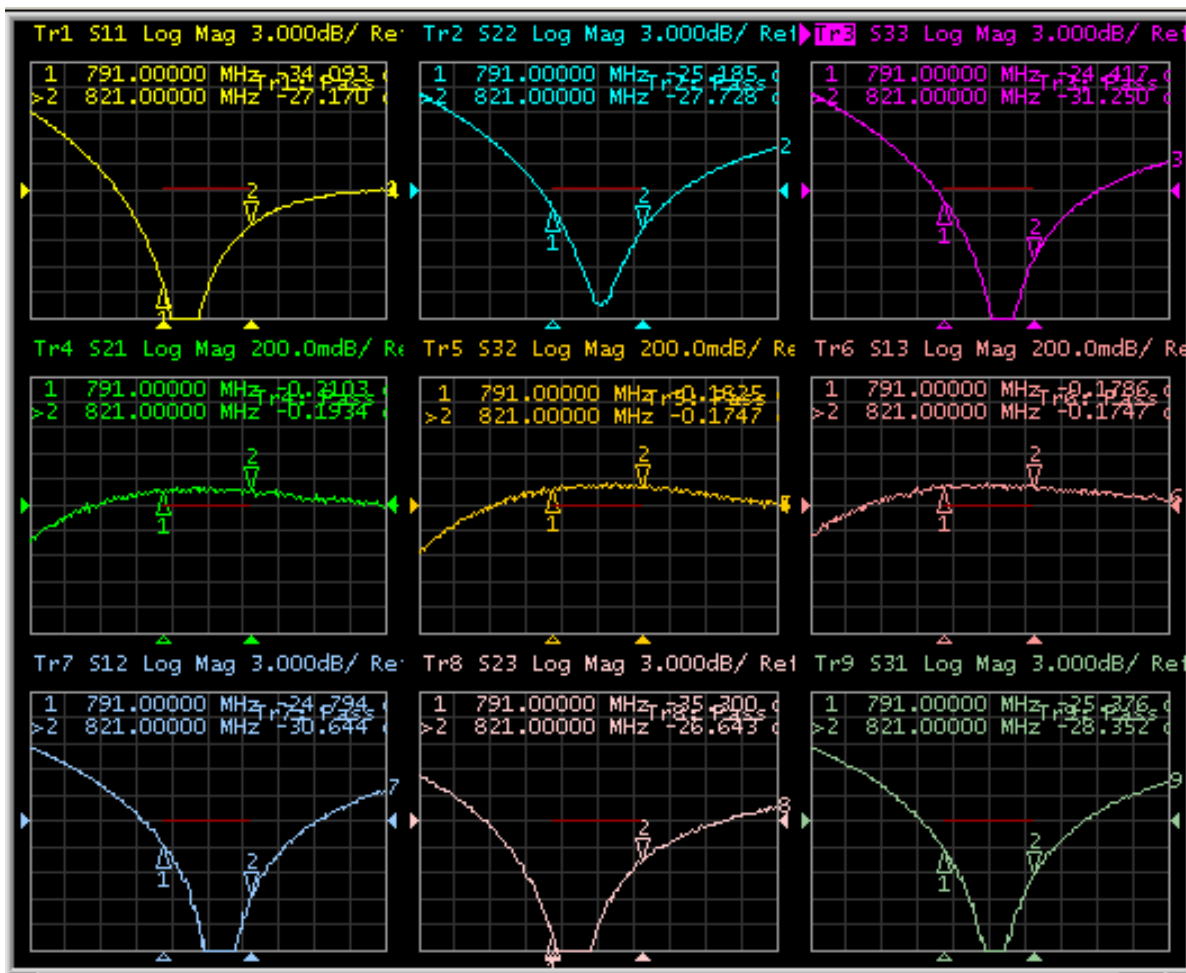

Application(s)

- Telecom