

X Band Surface Mount Circulator

JCM10K0T10K5VM6R

Description:




JCM10K0T10K5VM6R is a surface mount circulator in the frequency 10.000~10.500 GHz. The device is extremely stable over the temperature range of -20°C to +90°C, with maximum insertion loss of 0.4dB and minimum return loss of 18.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 60/60/-

Electrical Specification

Part Number	JCM10K0T10K5VM6R
Frequency (MHz)	10.000~10.500
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-20°C~+90°C
Power FWD/REV/PK(Watt)	60/60/-


Outline

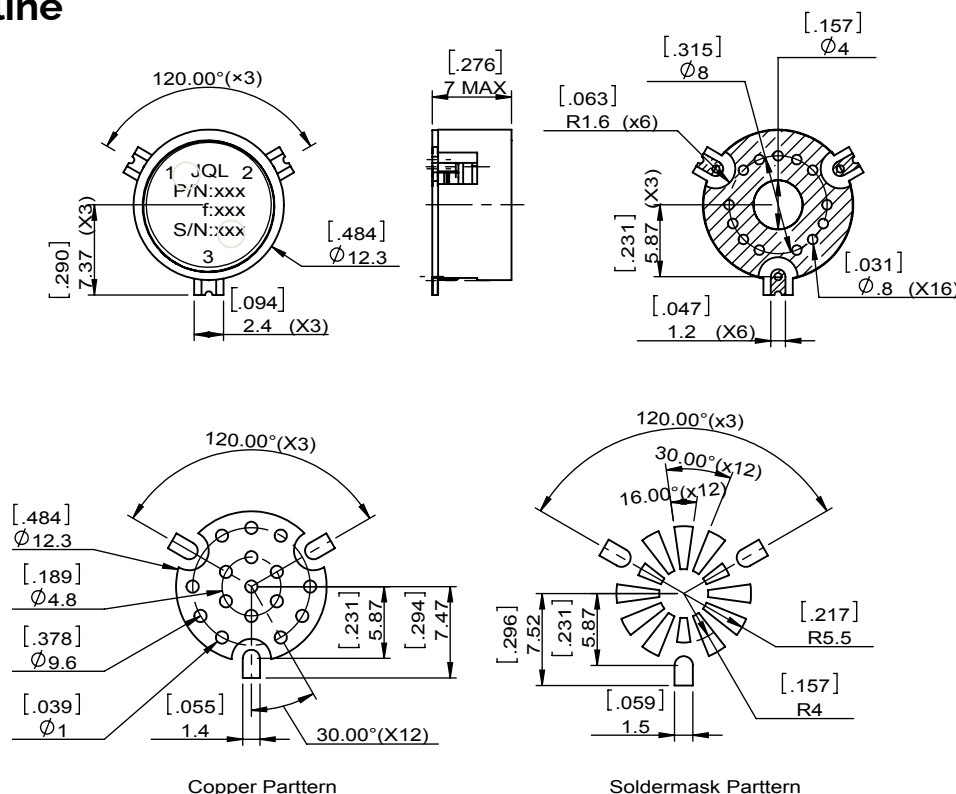

X Band Surface Mount Circulator

JCM10K0T10K5VM6R

Test Data

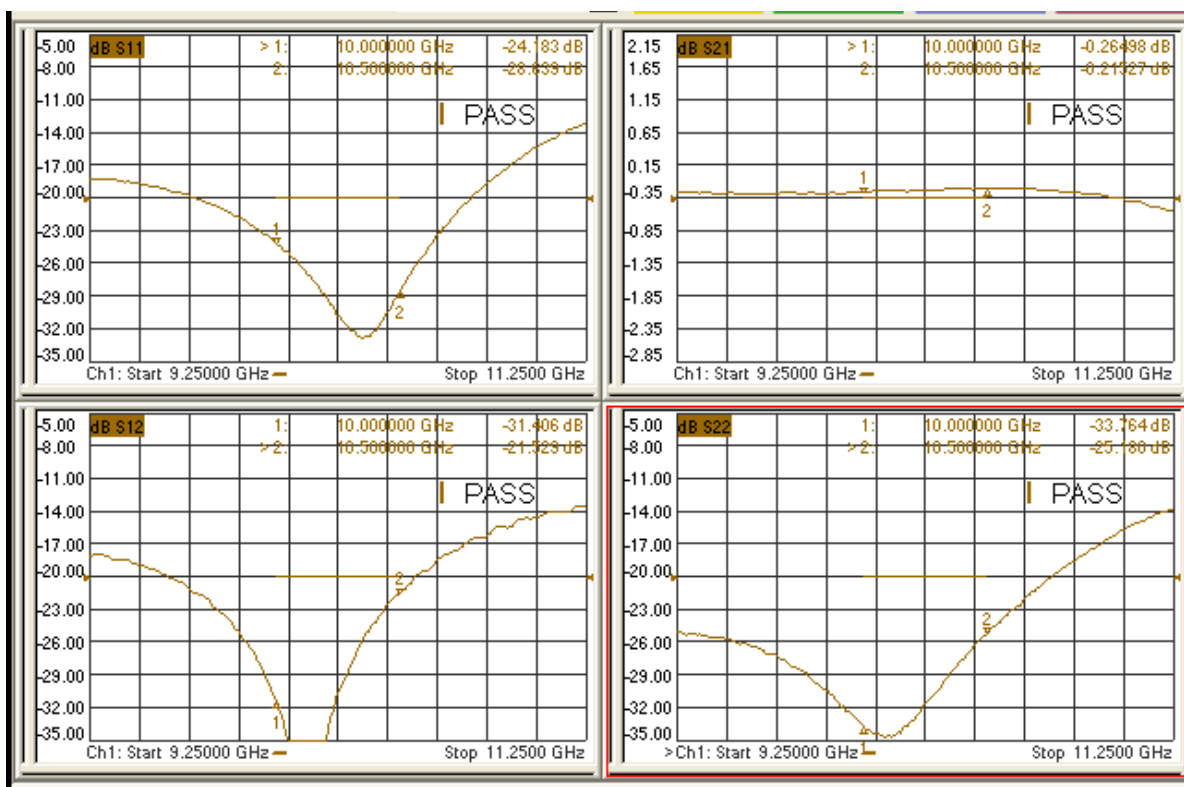

Applications

- Radar