


JIC10K7T13K5SMSF0

Electrical Specification

Part Number	JIC10K7T13K5SMSF0
Frequency (GHz)	10.700~13.500
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~70°C
Power FWD/REV/PK(Watt)	1/1/-


A technical drawing of a four-ported valve assembly. It features a central circular port with a cross symbol inside. Surrounding this central port are four square ports, each also containing a cross symbol. The assembly is shown in a perspective view, with a cylindrical component on the left and a coiled hose or cable on the right.

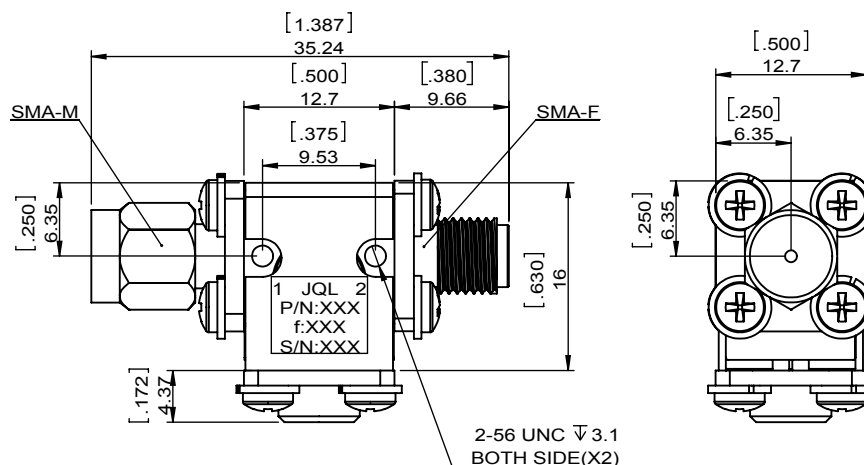

10.7~13.5GHz Band Coaxial Circulator

JIC10K7T13K5SMSF0

Test Data

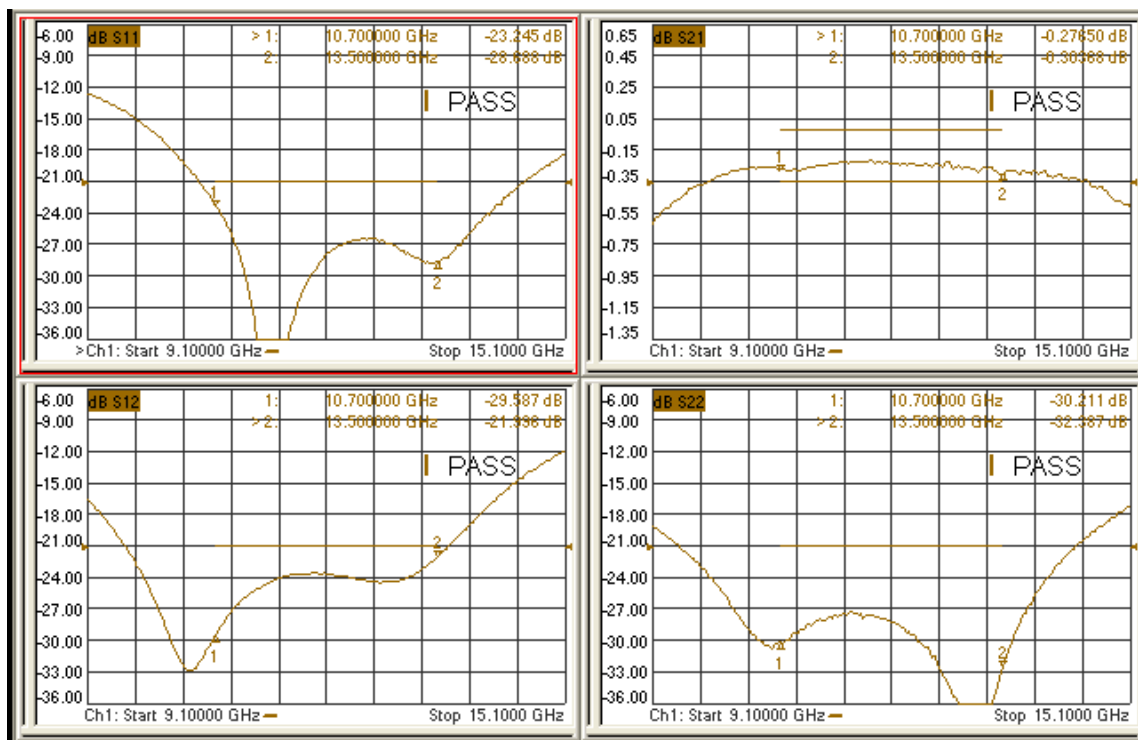

Applications

- Microwave Radio