

JID0960T1215M20PC

JID0960T1215M20PC is a UHF band drop-in isolator in the frequency 0.960~1.215GHz. The device is extremely stable over the temperature range of -20°C to +85°C, with maximum insertion loss of 0.45dB and minimum return loss of 18.0dB. It can handle Power FWD/REV/PK(Watt) of -/-/2 KW Duty Cycle 4%


Part Number	JID0960T1215M20PC
Frequency (GHz)	0.960~1.215
Insertion Loss(dB)	0.45
Isolation(dB)MIN	18.0
Return Loss(dB)	18.0
Operating Temperature	-20°C~+85°C
Power FWD/REV/PK(Watt)	-/-/2 KW Duty Cycle 4%
Tab(W×LG×THK)(mm[Inch])	1.0[.04]x2.5[.098]x0.2[0.008]

[illegible]

UHF Band Drop-In Isolator

JID0960T1215M20PC

Test Data

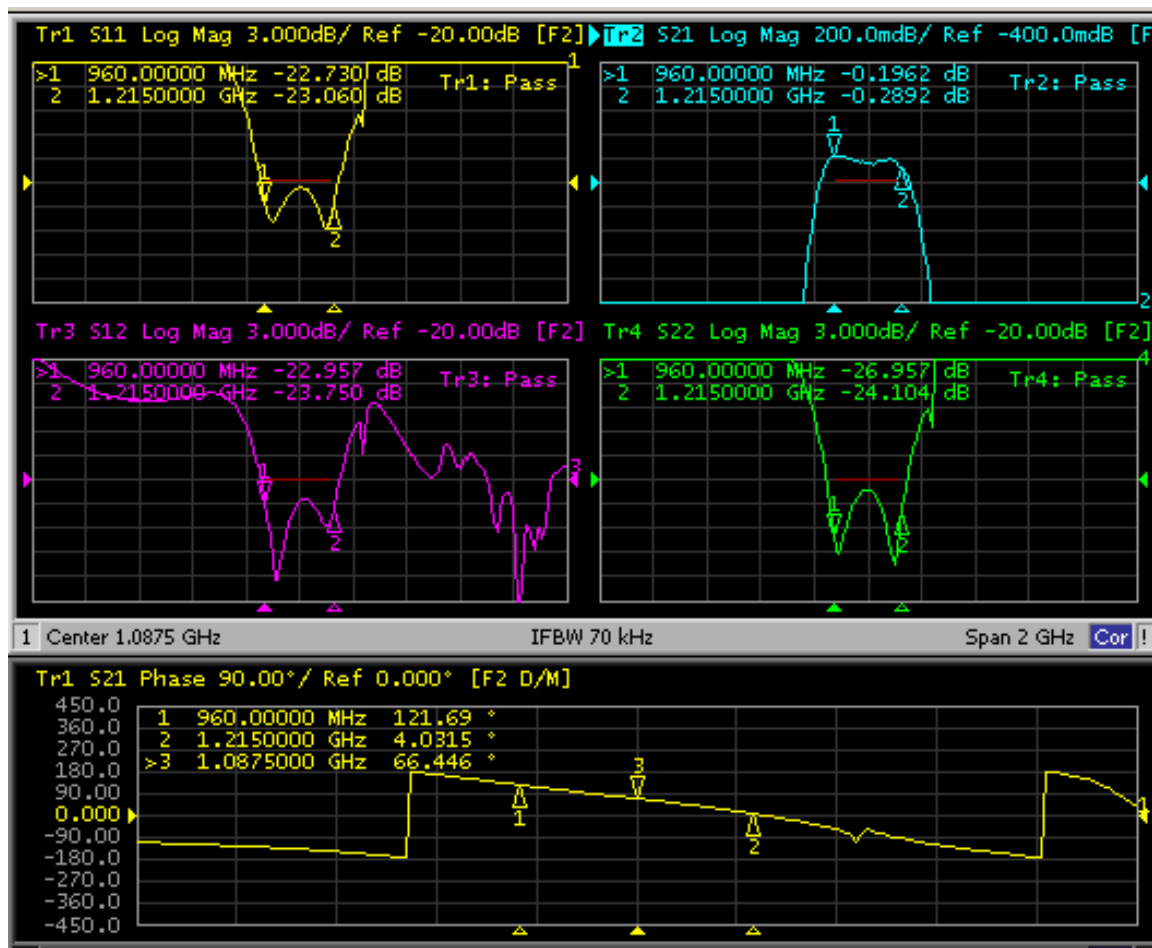

Applications

- Radar