


L Band Drop-in Isolator

JID1200T1400SM10

Description:

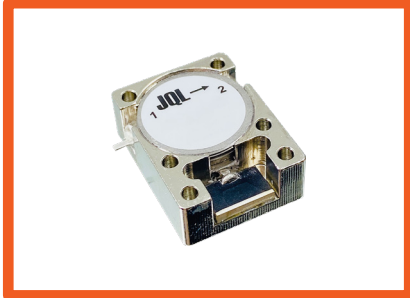


JID1200T1400SM10 is a drop-in isolator in the frequency 1.200~1.400 GHz. The device is extremely stable over the temperature range of -40°C to +80°C, with maximum insertion loss of 0.35dB and minimum return loss of 20.0dB. It can handle a Power FWD/REV/PK(Watt) of 100/100/1000,10% Duty cycle

Electrical Specification

Part Number	JID1200T1400SM10
Frequency (GHz)	1.200~1.400
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~80°C
Power FWD/REV/PK(Watt)	100/100/1000,10% Duty cycle
Tab(W×LG×THK)(mm[Inch])	0.85[.034]×2.5[.1]×0.2[.008]


Outline

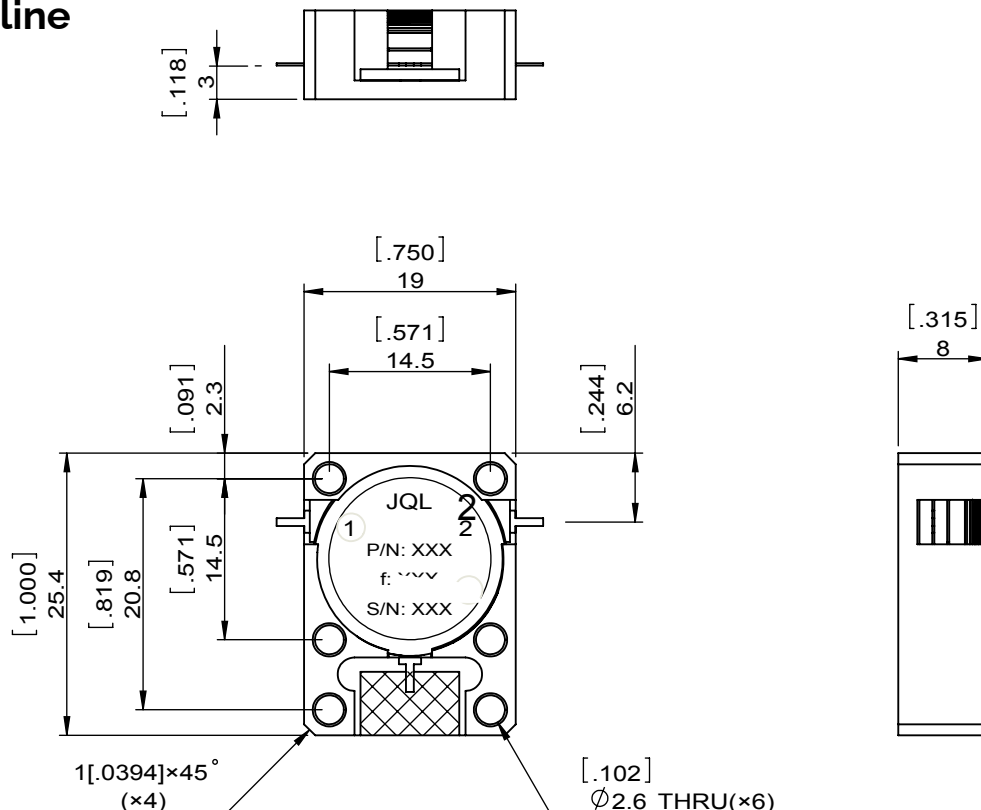

L Band Drop-in Isolator

JID1200T1400SM10

Test Data

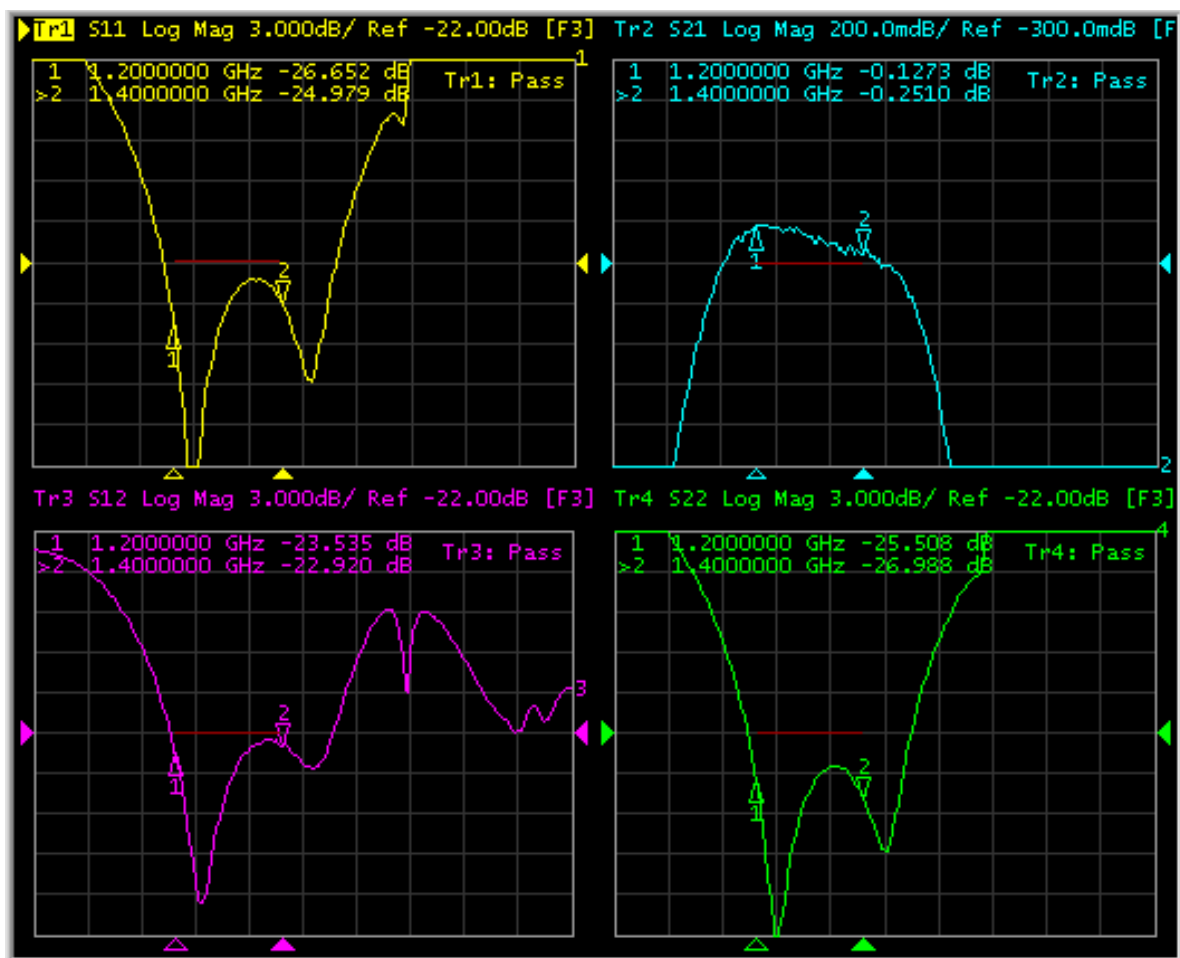

Applications

- Radar