


JCD2000T2300SM5

Electrical Specification

Part Number	JCD2000T2300SM5
Frequency (MHz)	2.000~2.300
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	50/50/-
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[0.098]x0.2[0.008]


Figure 1118 shows a schematic diagram of a rectangular component. It features a central vertical slot and two circular features, one on each side of the slot. A dimension line on the left indicates a height of 3 units.

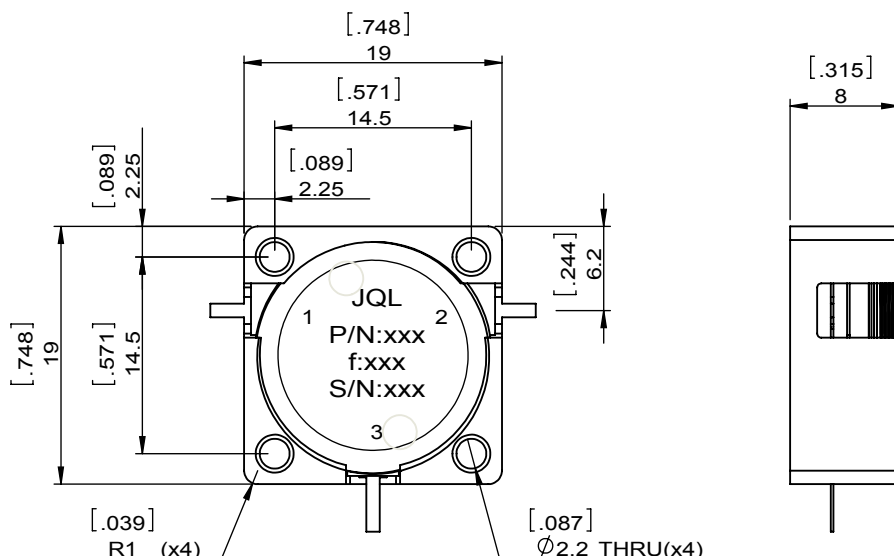

S Band Drop-In Circulator

JCD2000T2300SM5

Test Data

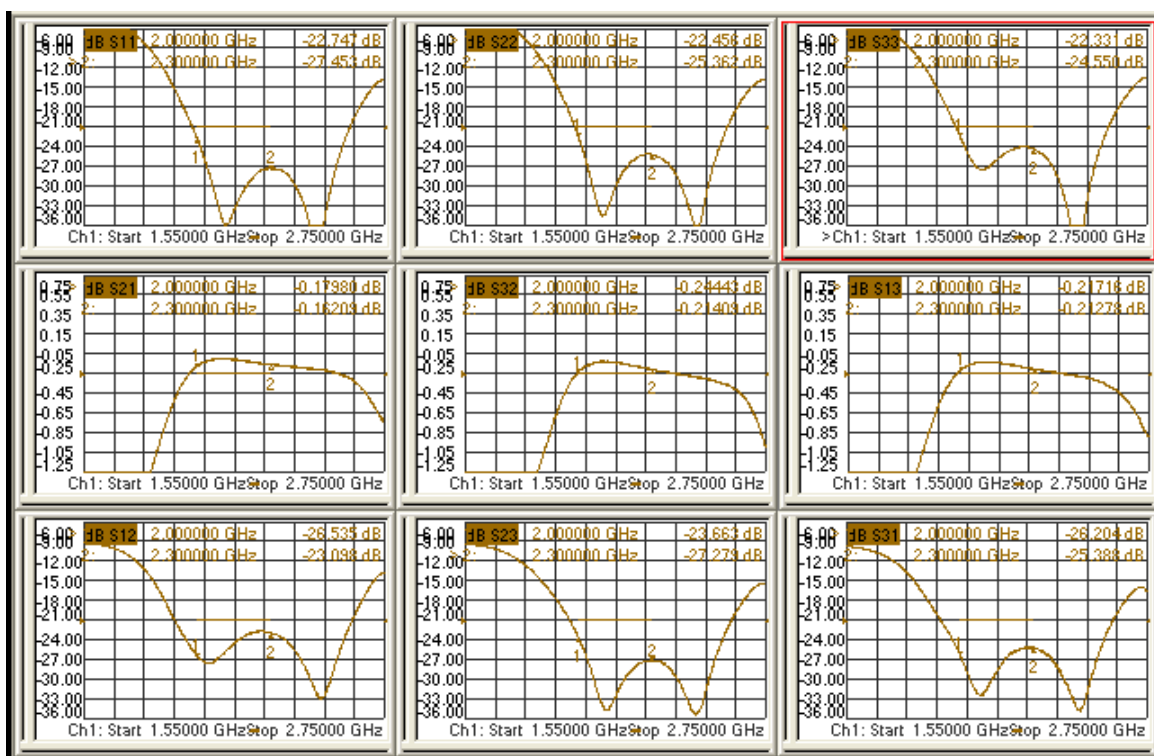

Applications

- Telecom