

S Band Drop-In Circulator

JCD3300T3700SM10R

Description:




JCD3300T3700SM10R is a drop-in circulator in the frequency 3.300~3.700GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 20.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	JCD3300T3700SM10R
Frequency (MHz)	3.300~3.700
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	100/100/-
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]


Outline

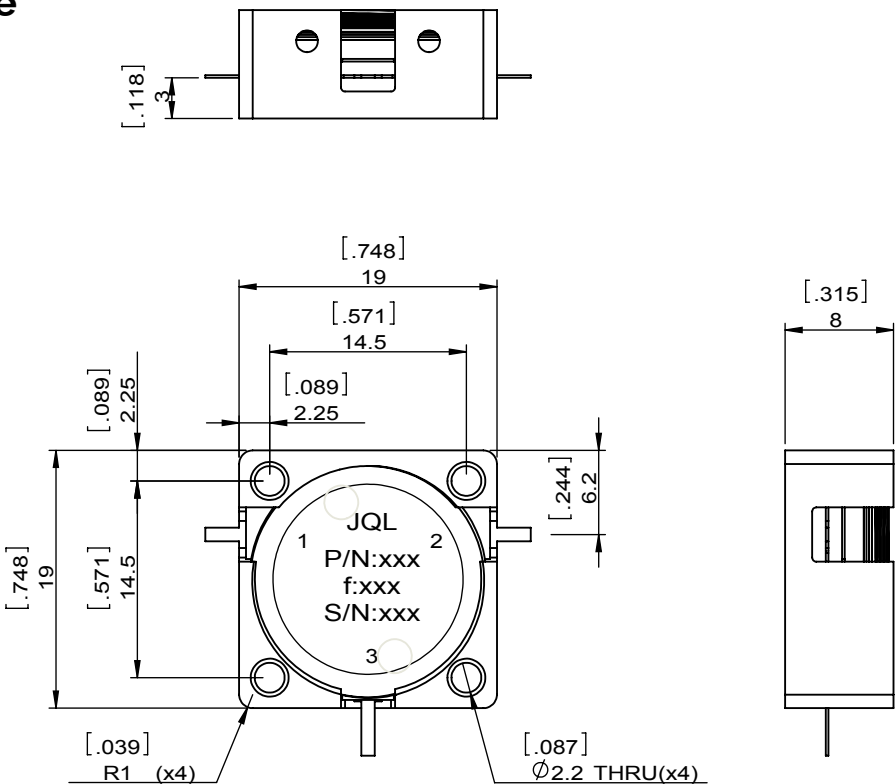

S Band Drop-In Circulator

JCD3300T3700SM10R

Test Data

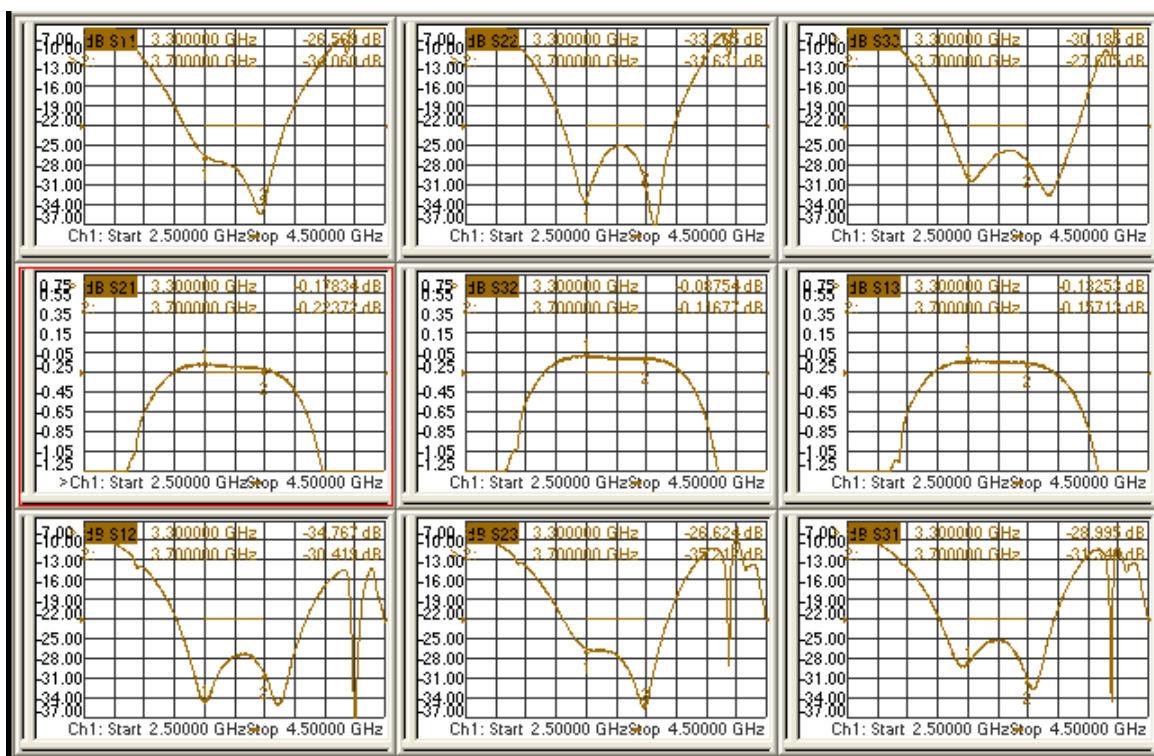

Applications

- 5G