

# S Band Surface Mount Circulator

## JCM2850T3350PV10C

### Description:




JCM2850T3350PV10C is a surface mount circulator in the frequency 2.850~3.350 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.35dB and minimum return loss of 20.0@+25°C || 18.0@-40~+85°C. This circulator can handle a CCW Power FWD/REV/PK(Watt) of 100/100/500, 50% duty cycle with 40msec

### Electrical Specification

Part Number	JCM2850T3350PV10C
Frequency (MHz)	2.850~3.350
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0@+25°C    18.0@-40~+85°C
Return Loss(dB)MIN	20.0@+25°C    18.0@-40~+85°C
Operating Temperature	-40°C~+90°C
Power FWD/REV/PK(Watt)	100/100/500, 50%duty cycle with 40msec


### Outline

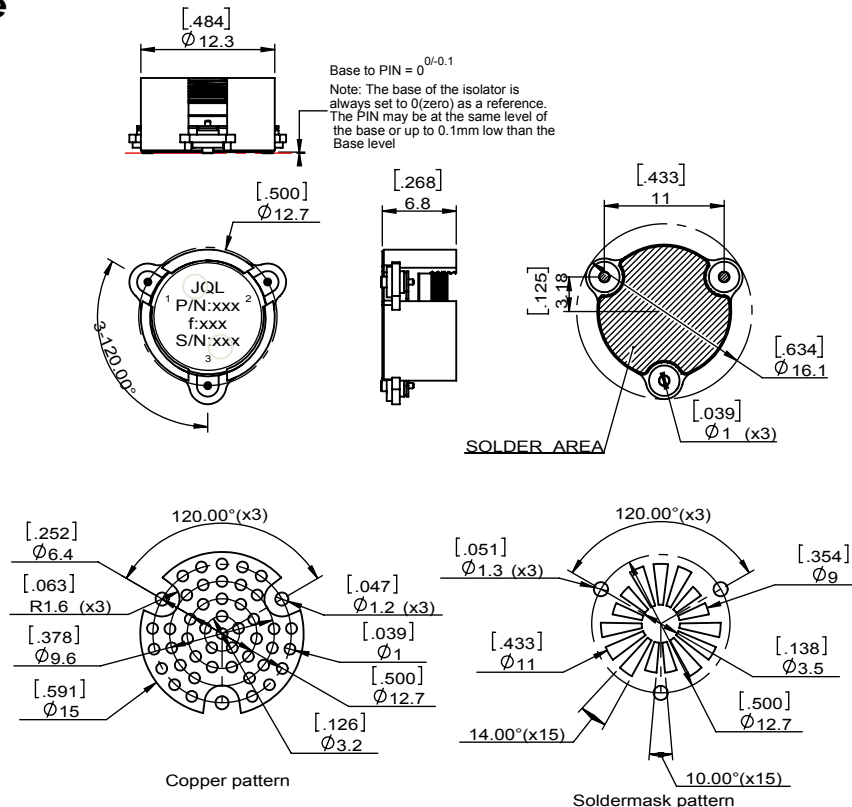

# S Band Surface Mount Circulator

## JCM2850T3350PV10C

### Test Data

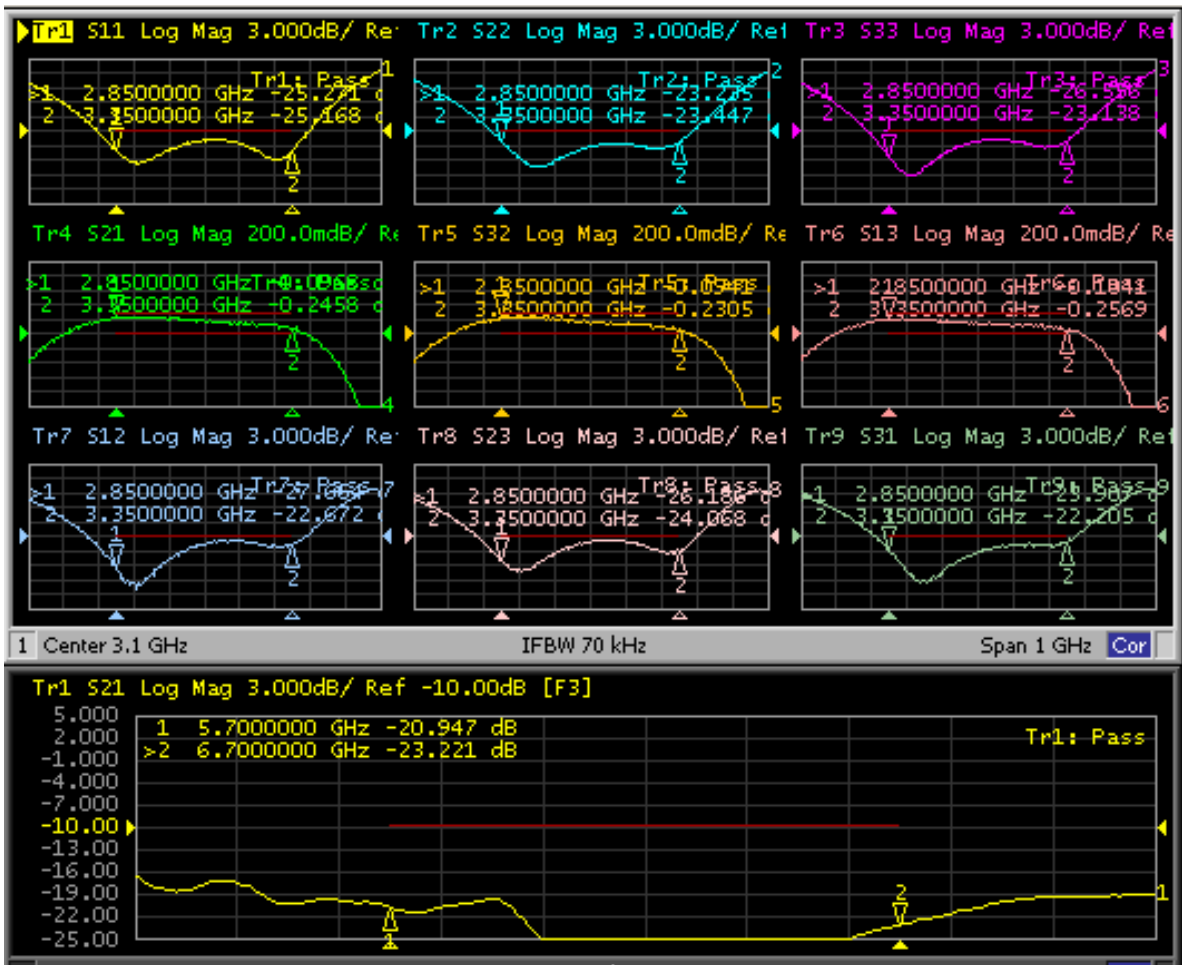

### Applications

- Radar