


JCD0900T0930SM20C

Electrical Specification


Part Number	JCD0900T0930SM20C
Frequency (GHz)	0.900~0.930
Insertion Loss(dB)MAX	0.30@+25°C 0.35@-40~+85°C
Isolation(dB)MIN	22.0@+25°C 20.0@-40~+85°C
Return Loss(dB)MIN	22.0@+25°C 20.0@-40~+85°C
Operating Temperature	-40°C~85°C
Power Handling(Watt)	200/200/-
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]

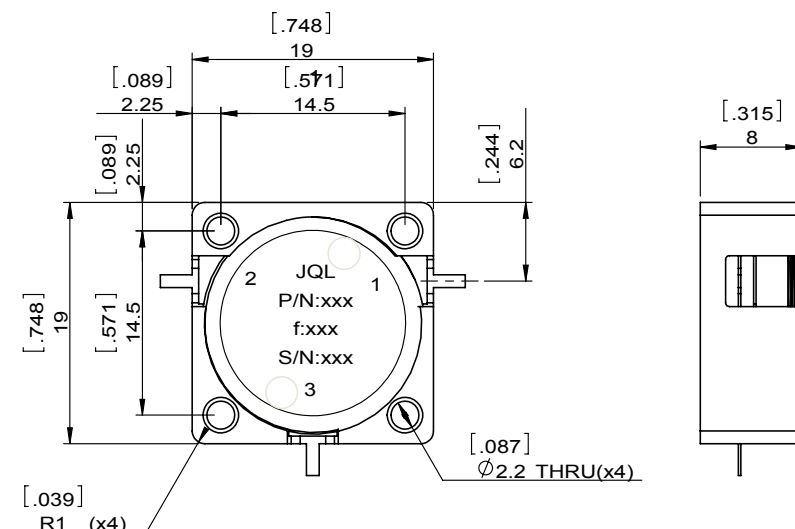

UHF Band Drop-In Circulator

JCD0900T0930SM20C

Test Data

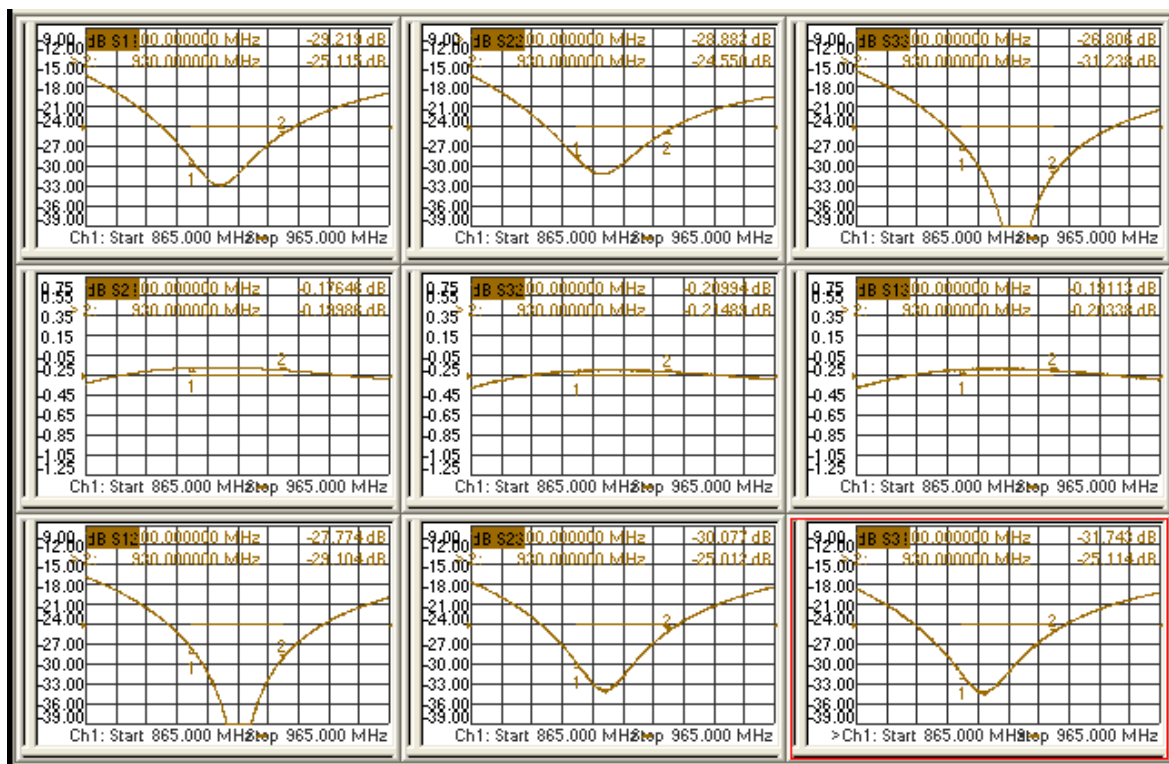

Applications

- Telecom