

S Band Surface Mount Circulator

JCM2300T2400PV8

Description:




JCM2300T2400PV8 is a surface mount circulator in the frequency 2.300~2.400GHz. The device is extremely stable over the temperature range of -40°C to +105°C, with maximum insertion loss of 0.3 (Typ:0.22)dB and minimum return loss of 20.0 (Typ:23.0). This circulator can handle a CW Power FWD/REV/PK(Watt) of 80/80/300

Electrical Specification

Part Number	JCM2300T2400PV8
Frequency (MHz)	2.300~2.400
Insertion Loss(dB)MAX	0.3(Typ:0.22)
Isolation(dB)MIN	20.0(Typ:23.0)
Return Loss(dB)MIN	20.0(Typ:23.0)
Operating Temperature	-40°C~+105°C
Power FWD/REV/PK(Watt)	80/80/300


Outline

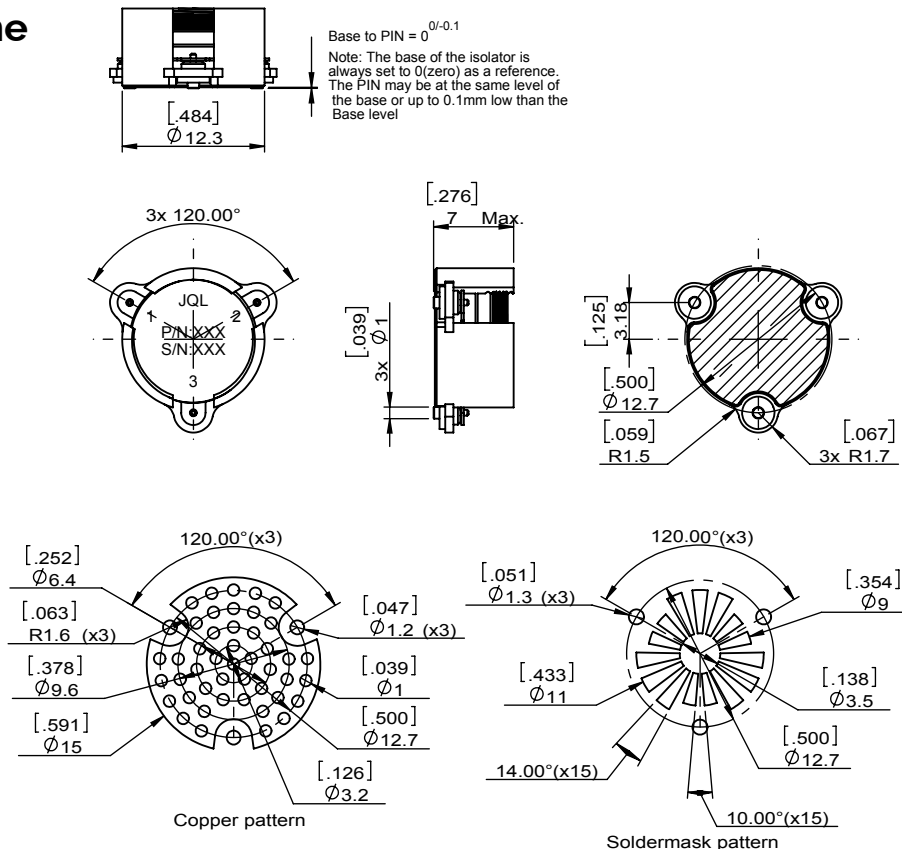

S Band Surface Mount Circulator

JCM2300T2400PV8

Test Data

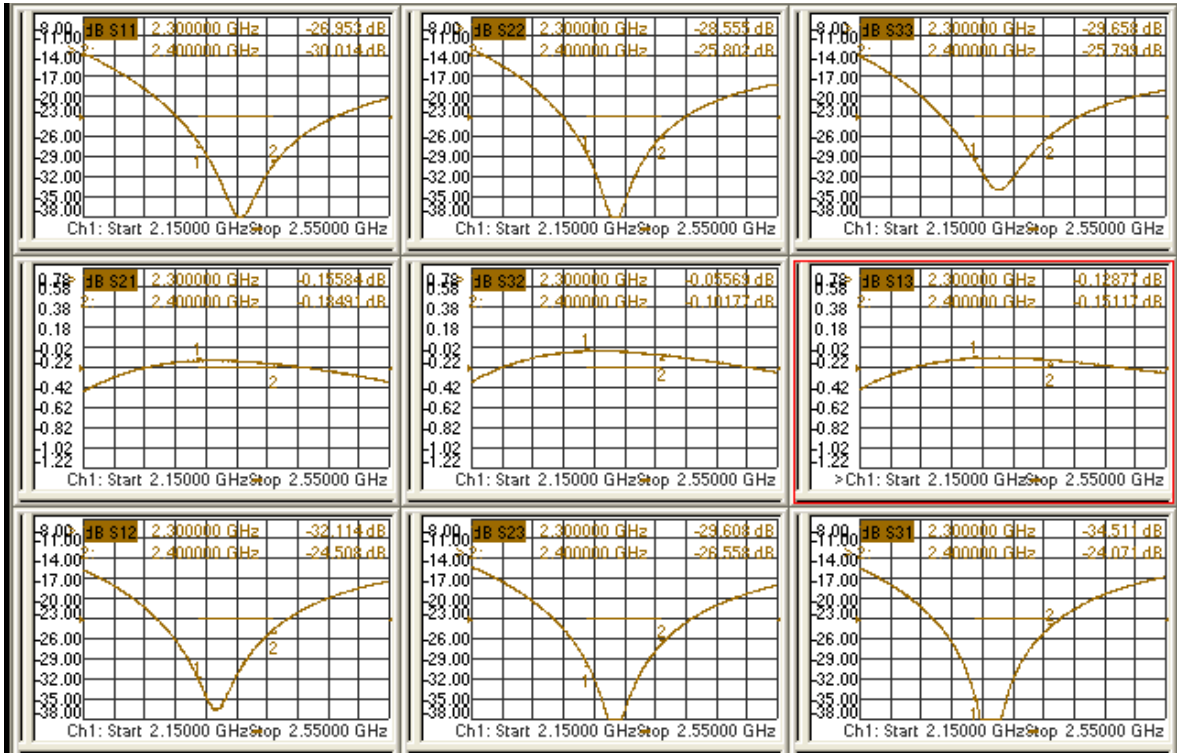

Applications

- Telecom