

JID0700T1000M10A3

JID0700T1000M10A3 is a UHF band drop-in isolator in the frequency 0.700~1.000GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.75@+25°C || 0.85@-20~+70°C and minimum return loss of 14.0@+25°C || 12.0@-20~+70°C. It can handle Power FWD/REV/PK(Watt) of 100/100/-


Part Number	JID0700T1000M10A3
Frequency (GHz)	0.700~1.000
Insertion Loss(dB)	0.75@+25°C 0.85@-20~+70°C
Isolation(dB)MIN	14.0@+25°C 12.0@-20~+70°C
Return Loss(dB)	14.0@+25°C 12.0@-20~+70°C
Operating Temperature	-20°C~+70°C
Power FWD/REV/PK(Watt)	100/100/-
Tab(W×LG×THK)(mm[Inch])	1[0.039]x2.5[0.098]x0.2[0.008]

[illegible]

UHF Band Drop-In Isolator

JID0700T1000M10A3

Test Data

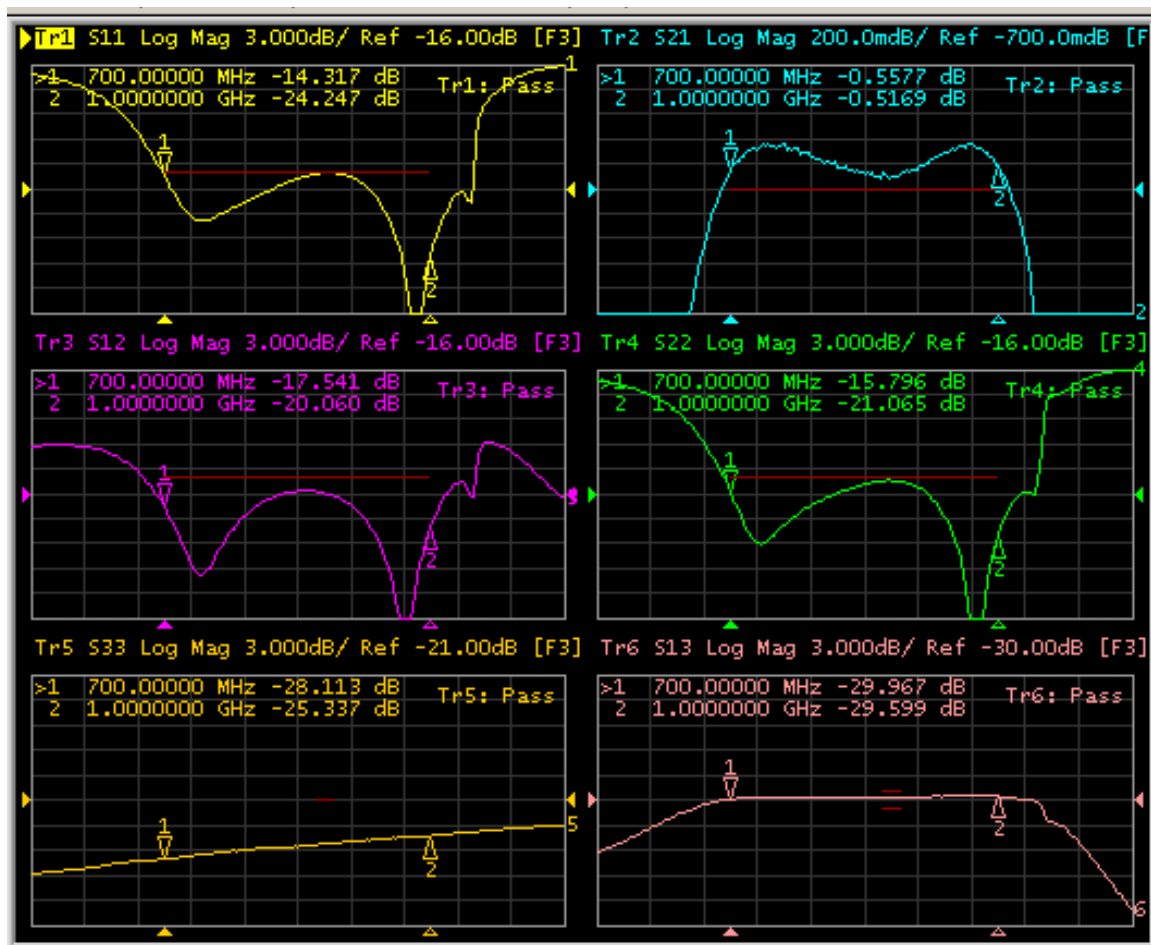

Applications

- Telecom