


Ku Band Drop-In Isolator

JID13K5T16K5CM0

Description:

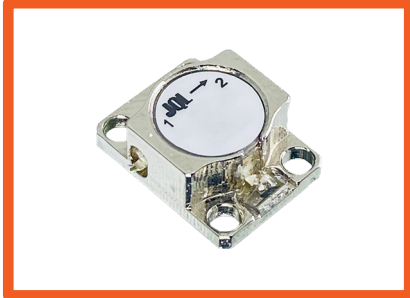


JID13K5T16K5CM0 is a drop-in Isolator in the frequency 13.50~16.50GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.5dB and minimum return loss of 18.0dB. It can handle CW Power FWD/REV/PK(Watt) of 10/10/-

Electrical Specification

Part Number	JID13K5T16K5CM0
Frequency (GHz)	13.50~16.50
Insertion Loss(dB)MAX	0.50
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-20°C~70°C
Power FWD/REV/PK(Watt)	10/10/10
Tab(W×LG×THK)(mm[Inch])	0.64[.025]×0.6[.024]×0.15[.006]


Outline

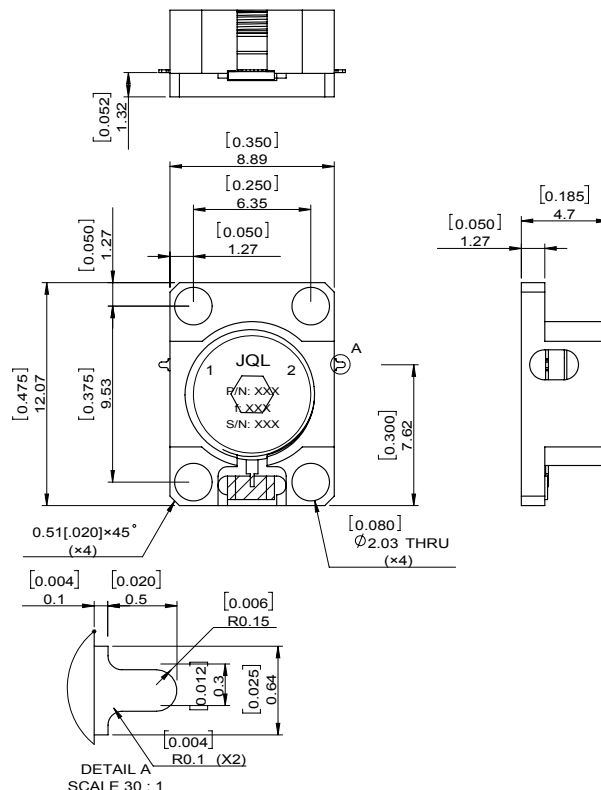

Ku Band Drop-In Isolator

JID13K5T16K5CM0

Test Data

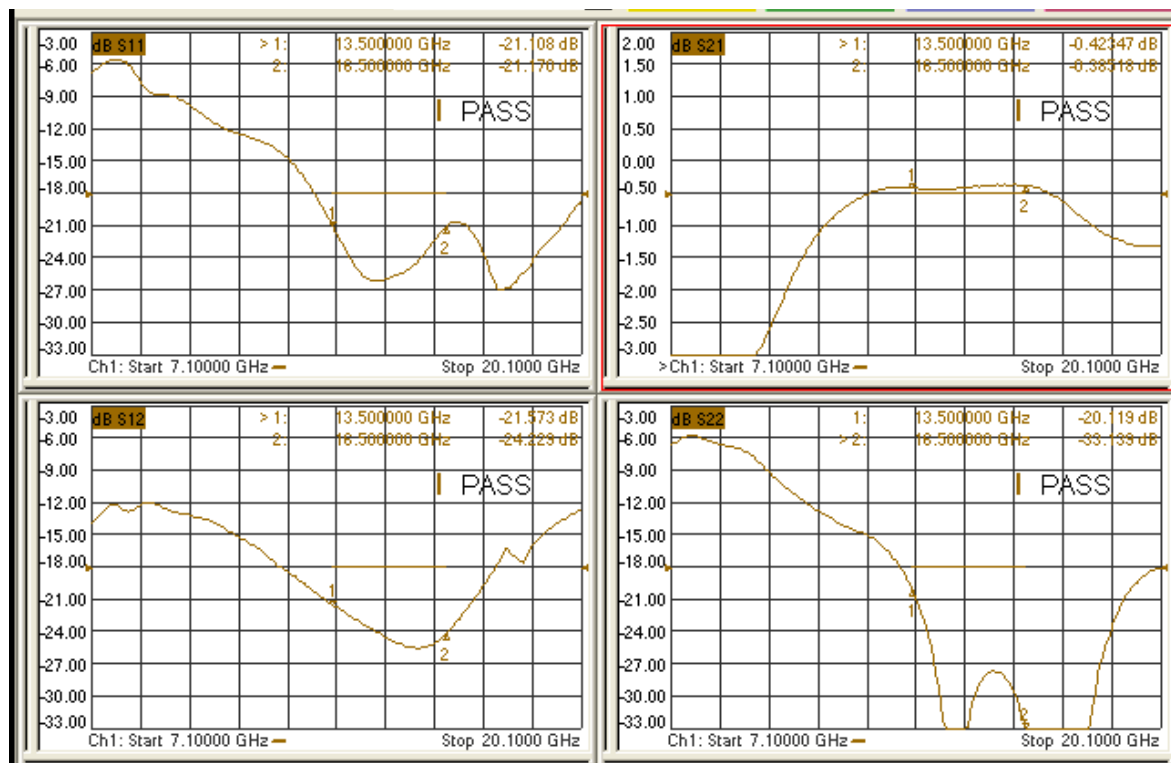

Applications

- Radio Link
- Space