


L Band Drop-In Isolator

JID1563T1588SM0

Description:

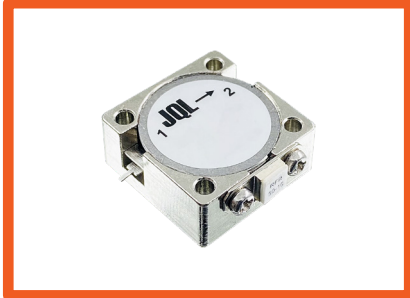


JID1563T1588SM0 is a drop-in Isolator in the frequency 1.563~1.587GHz. The device is extremely stable over the temperature range of -30°C to +75°C, with maximum insertion loss of 0.35dB and minimum return loss of 20.0dB. It can handle CW Power FWD/REV/PK(Watt) of 1/1/-

Electrical Specification

Part Number	JID1563T1588SM0
Frequency (GHz)	1.563~1.587
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-30°C~75°C
Power FWD/REV/PK(Watt)	1/1/-
Tab(W×LG×THK)(mm[Inch])	0.64[0.025]x2.5[0.098]x0.2[0.008]


Outline

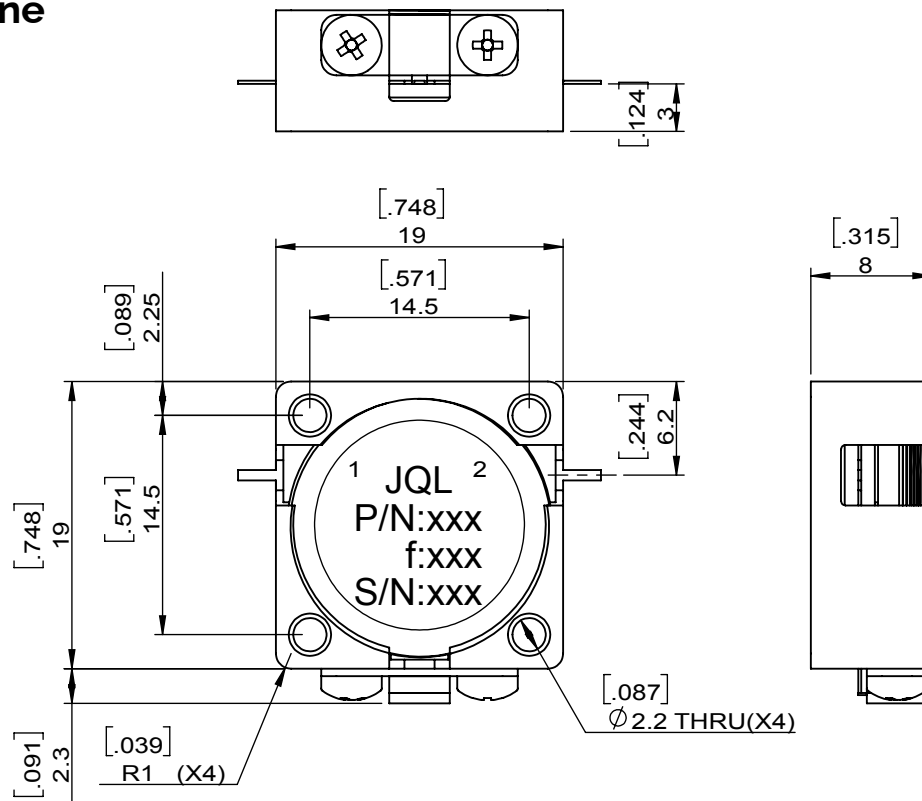

L Band Drop-In Isolator

JID1563T1588SM0

Test Data

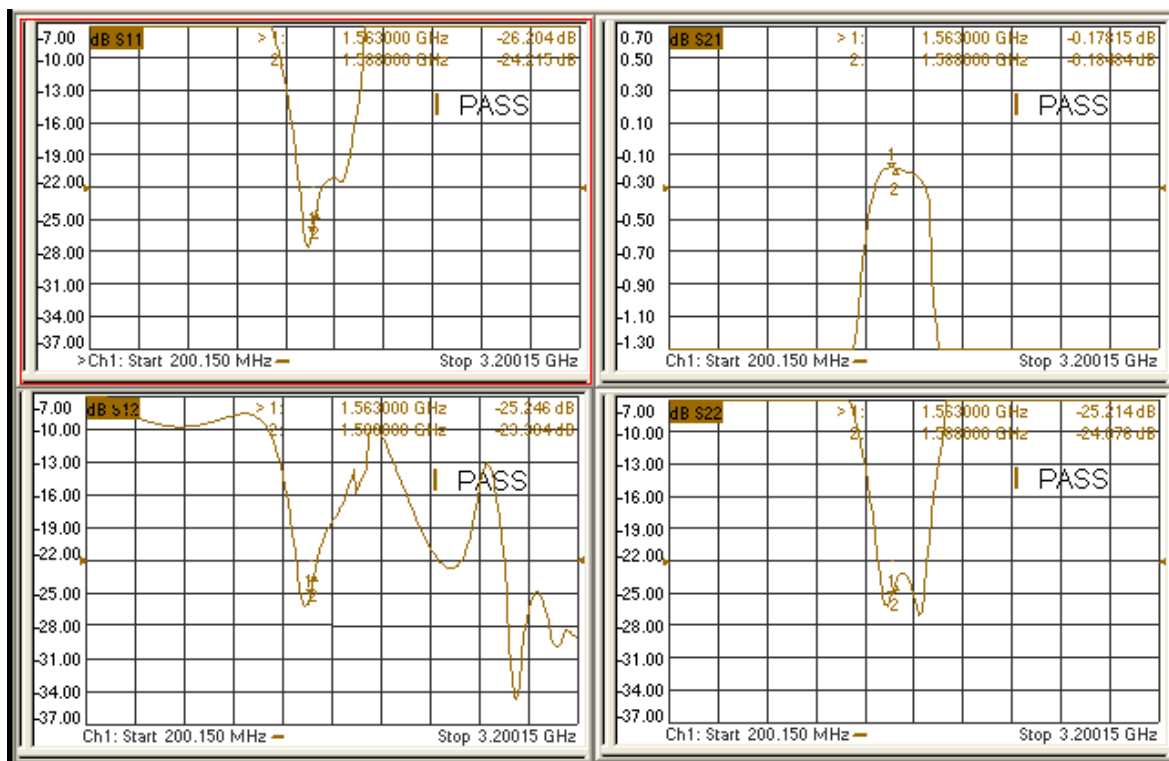

Applications

- Space