

Ka Band Waveguide Isolator

JIWR28-8A-27K0T29K5

Description:




JIWR28-8A-27K0T29K5 is a Waveguide isolator in the frequency 27.000~29.500GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.5dB and minimum return loss of 18.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 1/1/-

Electrical Specification

Part Number	JIWR28-8A-27K0T29K5
Frequency (GHz)	27.000~29.500
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	1/1/-


Outline

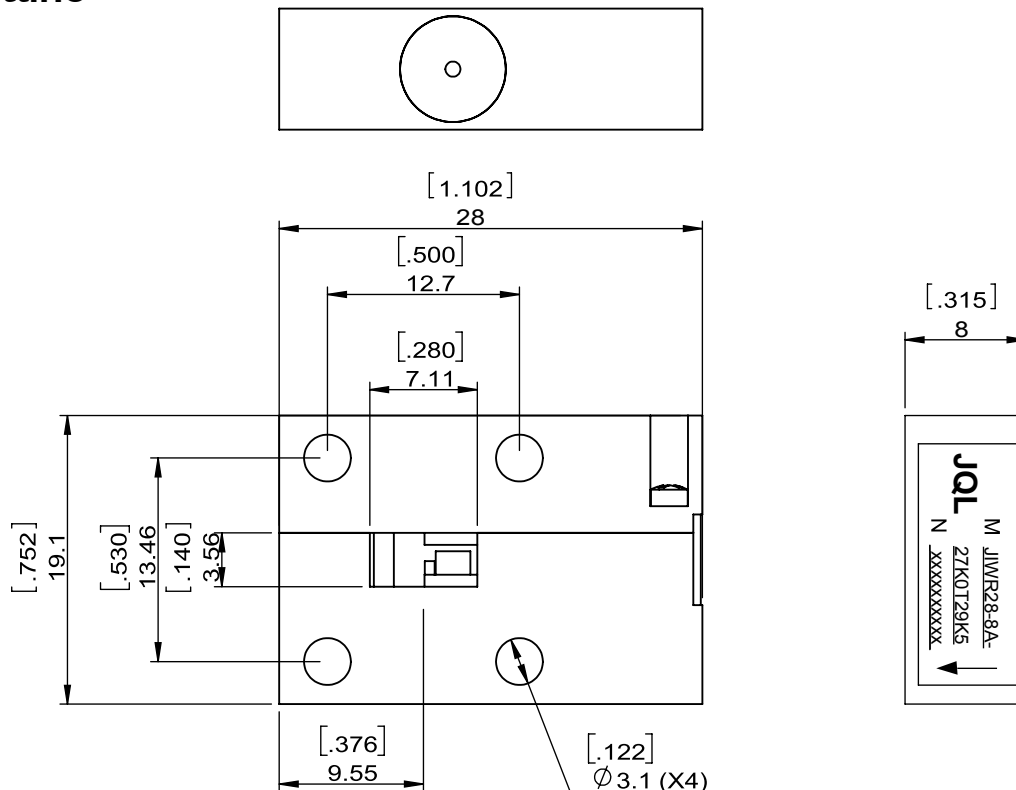

Ka Band Waveguide Isolator

JIWR28-8A-27K0T29K5

Test Data

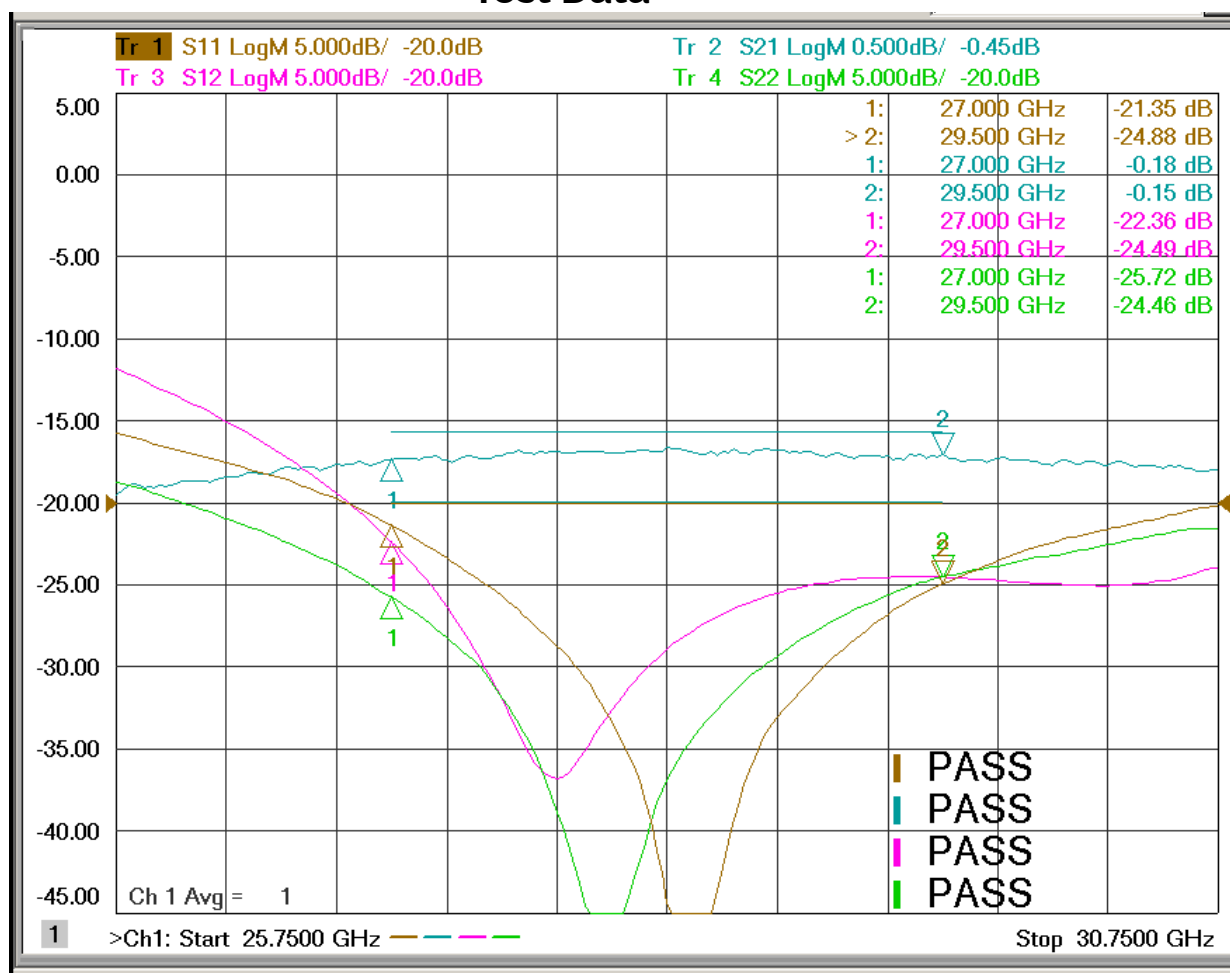

Applications

- Radio Link