


UHF Band Coaxial Circulator

JCC0350T0354N25U

Description:

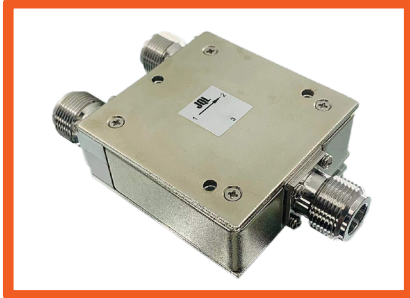


JCC0350T0354N25U is a coaxial circulator in the frequency 0.350~0.354 GHz. The device is extremely stable over the temperature range of -30°C to +70°C, with maximum insertion loss of 0.25dB and minimum return loss of 23.0dB. It can handle CW Power FWD/REV/PK(Watt) of 1000/1000/4000

Electrical Specification

Part Number	JCC0350T0354N25U
Frequency (GHz)	0.350~0.354
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	23.0
Operating Temperature	-30°C~70°C
Power FWD/REV/PK(Watt)	1000/1000/4000


Outline

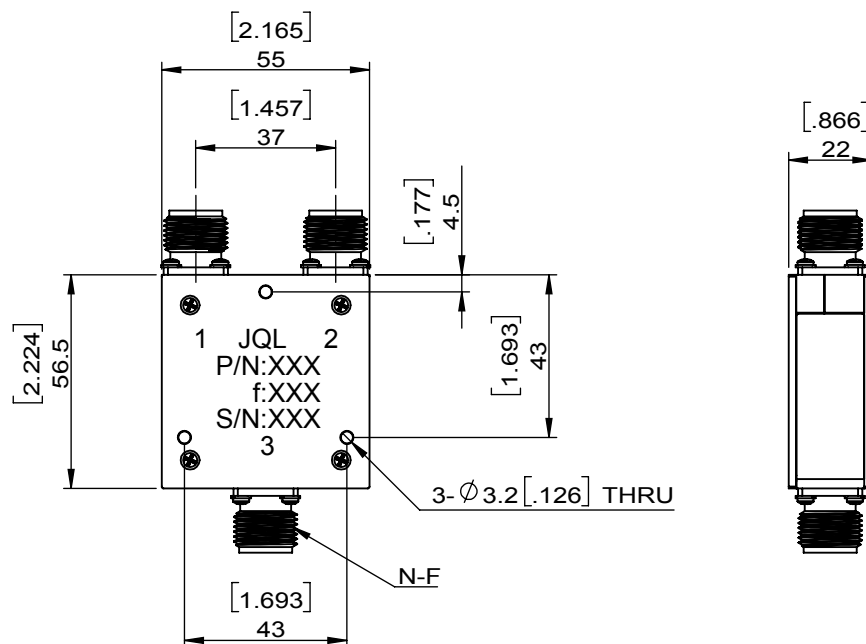

UHF Band Coaxial Circulator

JCC0350T0354N25U

Test Data

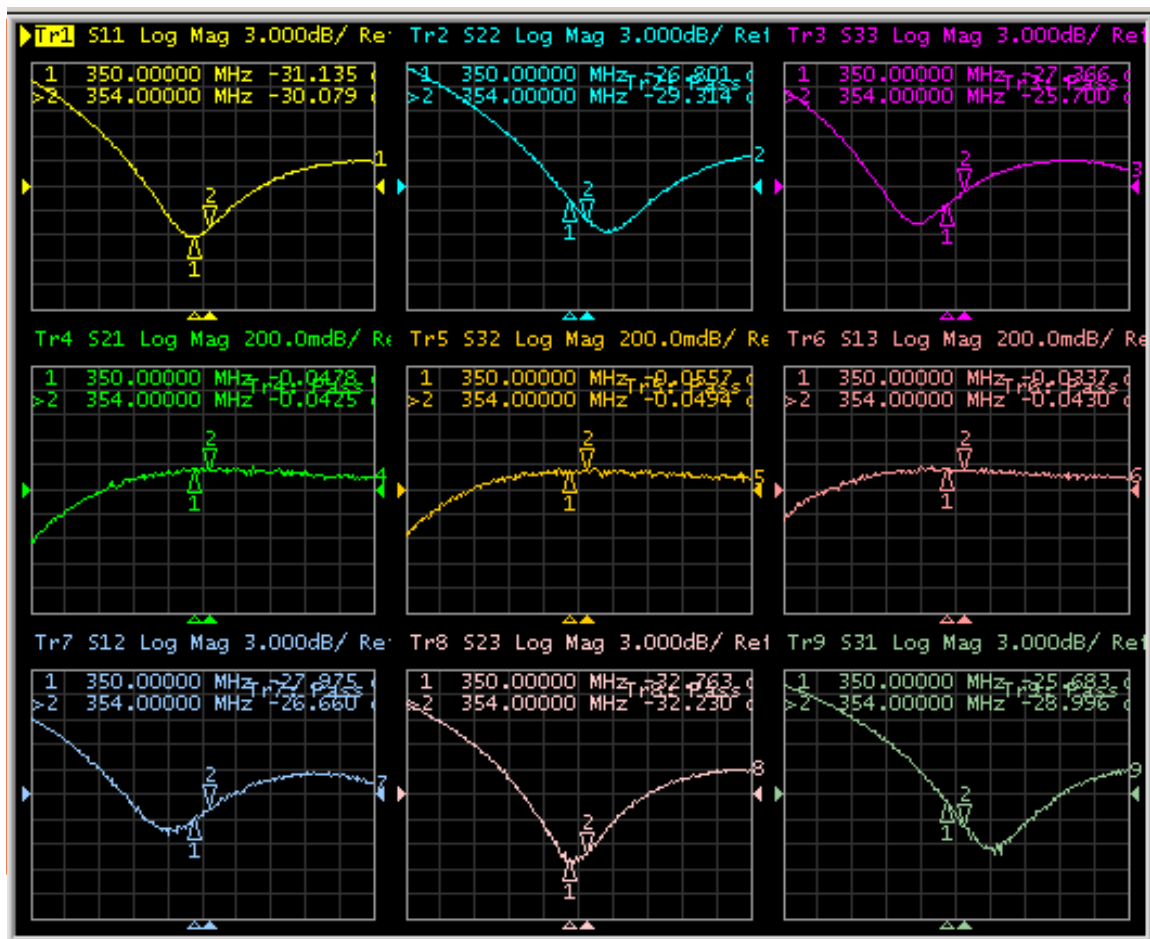

Features

- High Isolation
- Low insertion loss
- High power handling capability, 250 W CW
- RoHS & REACH Compliant

Applications

- Public Safety Infrastructure
- Power Amplifiers