


JCWR75-44F-10K95T12K75C-EM

Electrical Specification

Part Number	JCWR75-44F-10K95T12K75C-EM
Frequency (MHz)	10.95~12.75
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	100/60/-

Technical drawing of a rectangular plate with a central slot and four holes. The drawing includes the following dimensions and features:


- Overall width: $[1.500]$
- Overall height: $[1.122]$
- Slot width: $[1.040]$
- Distance between hole centers: 26.42
- Callout: $6-32 \text{ UNC } -2\text{B}$
 THRU ALL (x4)

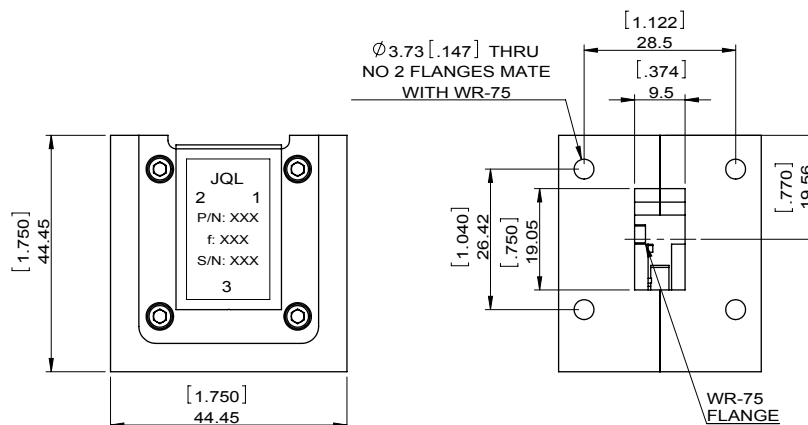

X Band Waveguide Circulator

JCWR75-44F-10K95T12K75C-EM

Test Data

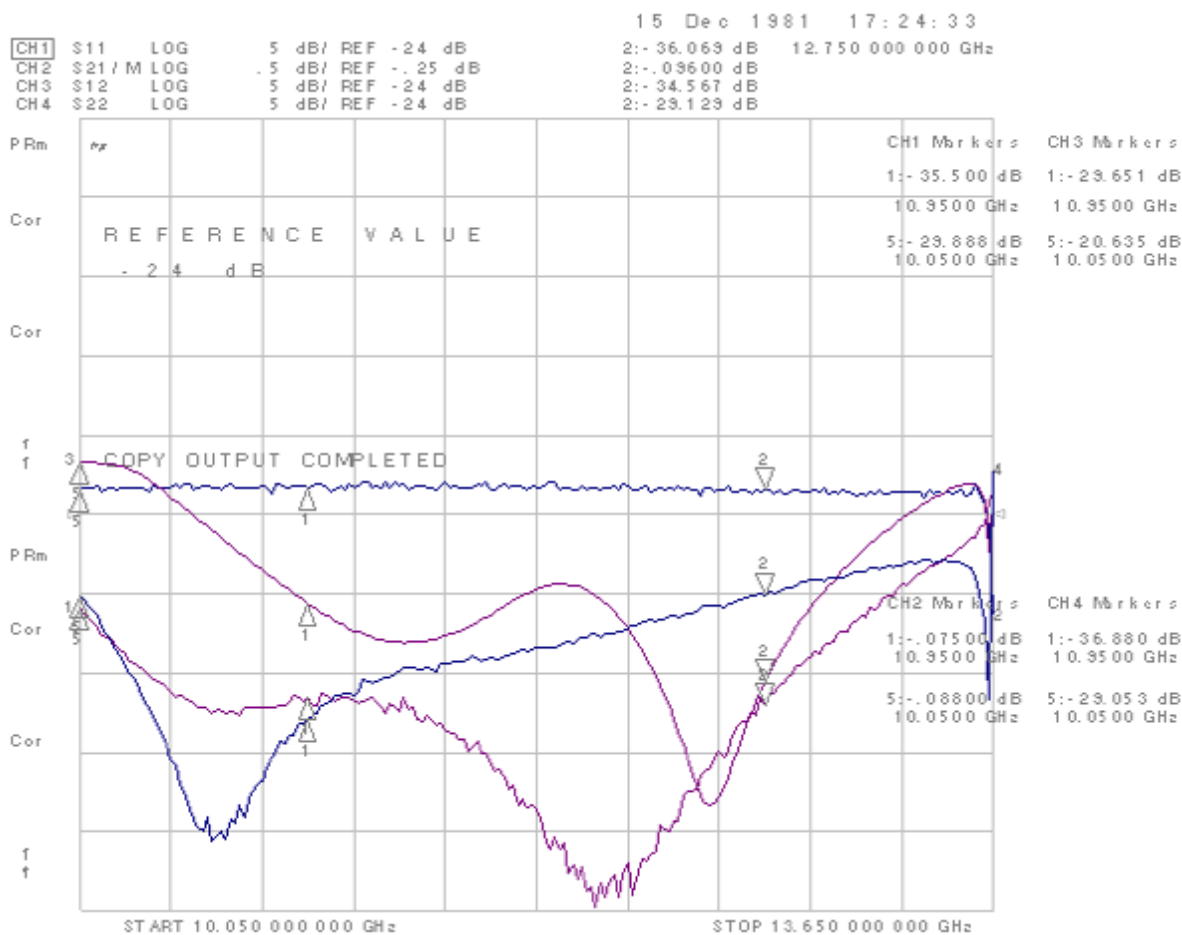

Application(s)

- Radio Link