

Ka Band Coaxial Circulator

JCC30K0T40K0KF0

Description:




JCC30K0T40K0KF0 is a coaxial circulator in the frequency 30.000~40.000GHz. The device is extremely stable over the temperature range of -20°C to +75°C, with maximum insertion loss of 1.0dB and minimum return loss of 14.0dB. It can handle a Power FWD/REV/PK(Watt) of 5/5/-

Electrical Specification

Part Number	JCC30K0T40K0KF0
Frequency (GHz)	30.000~40.000
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	14.0
Return Loss(dB)MIN	14.0
Operating Temperature	-20°C~75°C
Power FWD/REV/PK(Watt)	5/5/-


Outline

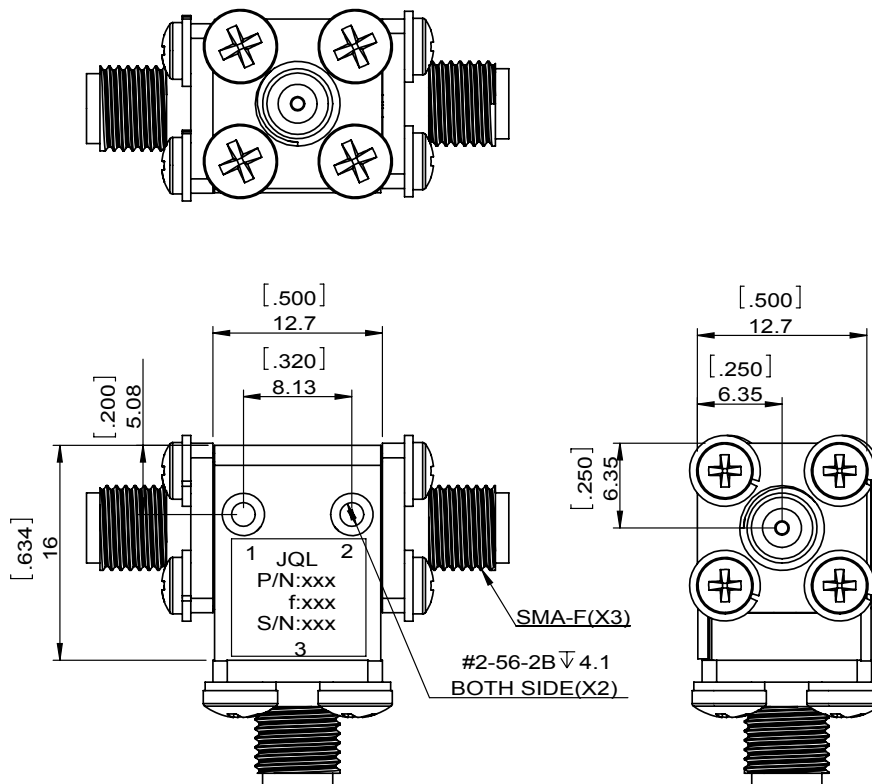

Ka Band Coaxial Circulator

JCC30K0T40K0KF0

Test Data

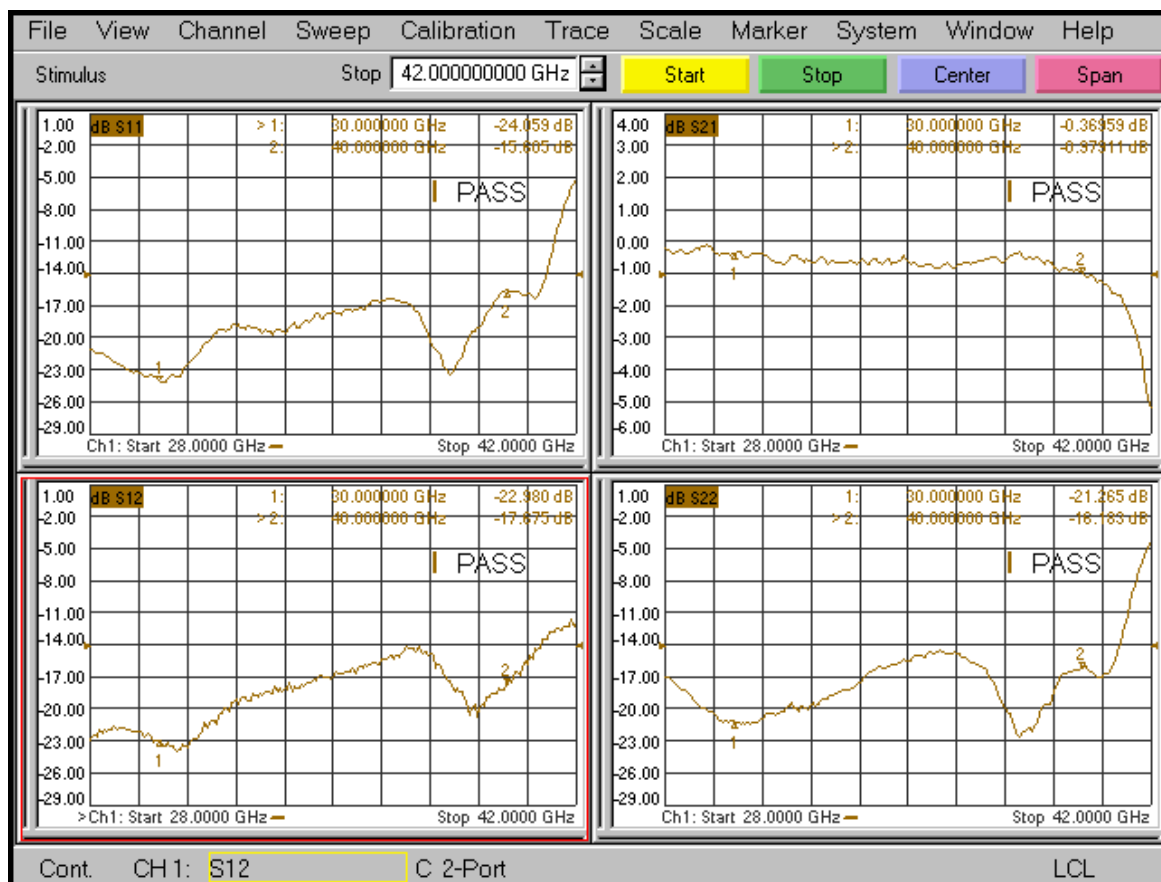

Applications

- Space