


JCD3700T4200SM6

Electrical Specification

Part Number	JCD3700T4200SM6
Frequency (MHz)	3.700~4.200
Insertion Loss(dB)MAX	0.40
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	60/60/600
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]


Outline

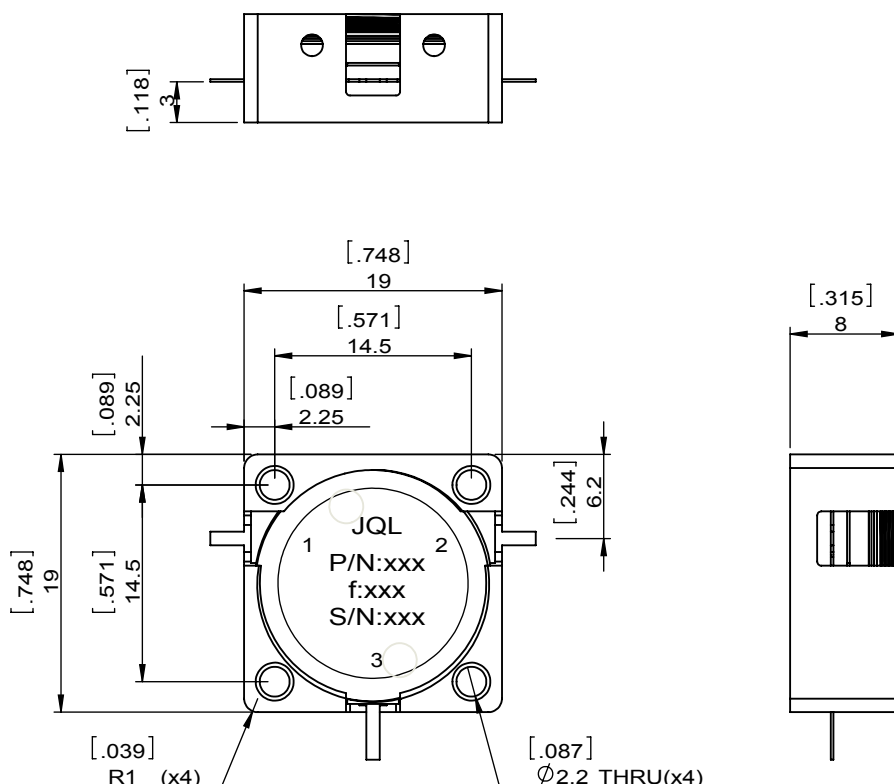

S Band Drop-In Circulator

JCD3700T4200SM6

Test Data

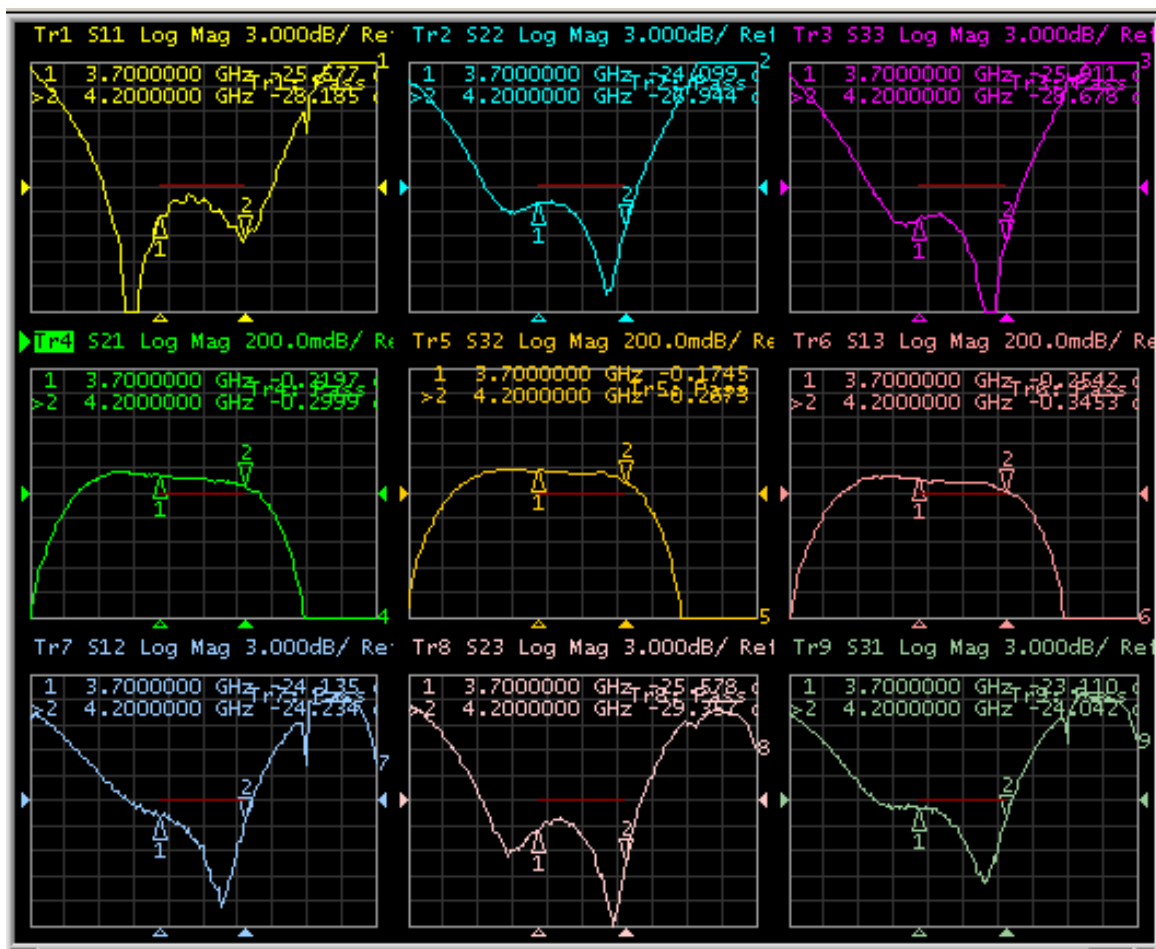

Applications

- Radar